


www.minglight.com.cn



Tel: +86 755 2834 3760
Fax: +86 755 2834 4134
[Http://www.minglight.en.alibaba.com](http://www.minglight.en.alibaba.com)
[Http://www.minglight.com.cn](http://www.minglight.com.cn)
E-mail: sales@minglight.com.cn sales@minglight.net
Factory Address: No.11, Yuanhu Road, Zhangbei Community
Longgang, Shenzhen, Guangdong, China 518172

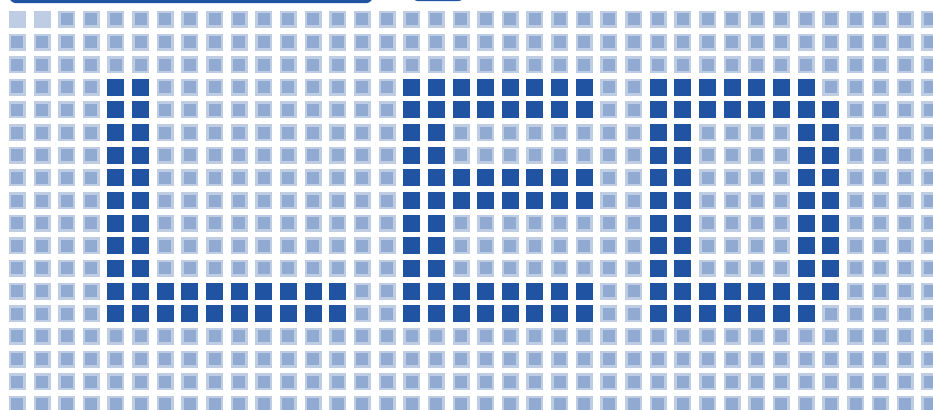

2019-2020

Innovation Gene
Better illumination
Great Value





Factory Minglight

Established in year of 2006, Shenzhen Minglight Co., Ltd is the leading LED lighting manufacturer based in Shenzhen - China exported over 120 countries. Company focus on industrial outdoor lighting, the main product include LED Wall Pack Light, LED Shoe Box / Parking Lot Light, LED Flood Light, LED High Bay Light, LED Barn / Yard Light, LED Canopy Light, etc.

Our Advantages

-Super Strong R & D Capacities, Minglight team with more than 10 engineers elite and invest millions dollar each year to develop new product, new product released each 4 months in average. All product are made by unique private mould.

-Advanced Manufacturing Facilities, Minglight own 10,000 square meters clean workshop with workforce above 100, equipment of integrating sphere, goniophotometer, constant temperature and humidity test chamber, salt spraying test machine, waterproof test, aging test and so on. The monthly production capacity reach to 100,000 units.

-Professional Sales & Service Team, Minglight sales & service staff are good English speaker 24 hours online, which can service customer and solve the problem effectively at first time.



CERTIFICATE

Model: ML-HB150W-DK70V	
Manufacturer: Shenzhen Minglight Co., Ltd.	
Brand: Minglight	
Technical Requirements Version: 4.2	
Date Qualified: 10/12/2015	
Product ID: 17040127	
Competition	
Main: Indoor Luminaire	Classification: Standard
General Application: High Bay	In Parent Product: Yes
Primary Use: High Bay Luminaire for Commercial and Industrial Building	DLC Family Code: 100126
Listing Status: Listed	
Tested Date	Reported Date
Zone Lumens	Spacing Criteria
Product Features	Version History
Family Data	
Light Output: 15000 lm	
Voltage: 140-150 V	
Efficiency: 120 lm/W	
Power Factor: 0.95	
CCT: 3000 K	
CRI: 71	
Total Harmonic Distortion: 0.4%	

Intertek AUTHORIZATION TO MARK																					
This document is the property of Intertek Testing Services and is not to be reproduced. The certification marks may be used only on the products of the company authorized to use them.																					
Applicant: Shenzhen Minglight Co., Ltd.	Manufacturer: Shenzhen Minglight Co., Ltd.																				
Address: Building No. 2, Nan Long Industrial Park, Shenzhen, P.R. China	Address: Building No. 2, Nan Long Industrial Park, Shenzhen, P.R. China																				
Country: China	Country: China																				
State: Guangdong	State: Guangdong																				
City: Shenzhen	City: Shenzhen																				
Phone: 86-755-26101010	Phone: 86-755-26101010																				
Fax: 86-755-26101011	Fax: 86-755-26101011																				
Email: minglight@minglight.com.cn	Email: minglight@minglight.com.cn																				
Party Authorized to Apply Mark: Shenzhen Minglight Co., Ltd.	Party Authorized to Apply Mark: Shenzhen Minglight Co., Ltd.																				
Control Number: 5000330	Authorized by: Intertek Testing Services Hong Kong Limited																				
This document is the property of Intertek Testing Services and is not to be reproduced. The certification marks may be used only on the products of the company authorized to use them.																					
<table border="1"> <tr> <td>Intertek Testing Services Inc.</td> <td>10000</td> </tr> <tr> <td>Intertek Testing Services Ltd.</td> <td>10000</td> </tr> <tr> <td>Intertek Testing Services (UK) Ltd.</td> <td>10000</td> </tr> <tr> <td>Intertek Testing Services (Australia) Pty Ltd.</td> <td>10000</td> </tr> <tr> <td>Intertek Testing Services (Canada) Inc.</td> <td>10000</td> </tr> <tr> <td>Intertek Testing Services (Japan) K.K.</td> <td>10000</td> </tr> <tr> <td>Intertek Testing Services (Korea) Ltd.</td> <td>10000</td> </tr> <tr> <td>Intertek Testing Services (Taiwan) Co., Ltd.</td> <td>10000</td> </tr> <tr> <td>Intertek Testing Services (Thailand) Co., Ltd.</td> <td>10000</td> </tr> <tr> <td>Intertek Testing Services (Vietnam) Co., Ltd.</td> <td>10000</td> </tr> </table>		Intertek Testing Services Inc.	10000	Intertek Testing Services Ltd.	10000	Intertek Testing Services (UK) Ltd.	10000	Intertek Testing Services (Australia) Pty Ltd.	10000	Intertek Testing Services (Canada) Inc.	10000	Intertek Testing Services (Japan) K.K.	10000	Intertek Testing Services (Korea) Ltd.	10000	Intertek Testing Services (Taiwan) Co., Ltd.	10000	Intertek Testing Services (Thailand) Co., Ltd.	10000	Intertek Testing Services (Vietnam) Co., Ltd.	10000
Intertek Testing Services Inc.	10000																				
Intertek Testing Services Ltd.	10000																				
Intertek Testing Services (UK) Ltd.	10000																				
Intertek Testing Services (Australia) Pty Ltd.	10000																				
Intertek Testing Services (Canada) Inc.	10000																				
Intertek Testing Services (Japan) K.K.	10000																				
Intertek Testing Services (Korea) Ltd.	10000																				
Intertek Testing Services (Taiwan) Co., Ltd.	10000																				
Intertek Testing Services (Thailand) Co., Ltd.	10000																				
Intertek Testing Services (Vietnam) Co., Ltd.	10000																				
ATN for Report 100000000001	Page 1 of 1																				

Model: ML-WPA-20W-30	
Manufacturer: Shenzhen Minglight Co., Ltd.	
Brand: Minglight	
Technical Requirements Version: 4.2	
Date Qualified: 10/12/2015	
Product ID: 17040120	
Competition	
Main: Outdoor Luminaire	Classification: Standard
General Application: High Bay	In Parent Product: Yes
Primary Use: Outdoor High Bay Luminaire for Commercial and Industrial Building	DLC Family Code: 100126
Listing Status: Listed	
Tested Date	Reported Date
Zone Lumens	Spacing Criteria
Product Features	Version History
Family Data	
Light Output: 2000 lm	
Voltage: 120-130 V	
Efficiency: 120 lm/W	
Power Factor: 0.95	
CCT: 3000 K	
CRI: 71	
Total Harmonic Distortion: 0.4%	

SAA APPROVALS	
Certificate of Suitability	
Certificate No.: SAA152194	
Certificate Holder: Shenzhen Minglight Co., Ltd.	
Class Description: LED High Bay	
Brand Name: Minglight	
Model No.: ML-WPA-20W-30	
Standards: AS/NZS 6134.1:2006, AS/NZS 6134.2:2006, AS/NZS 6134.3:2006, AS/NZS 6134.4:2006, AS/NZS 6134.5:2006, AS/NZS 6134.6:2006, AS/NZS 6134.7:2006, AS/NZS 6134.8:2006, AS/NZS 6134.9:2006, AS/NZS 6134.10:2006, AS/NZS 6134.11:2006, AS/NZS 6134.12:2006, AS/NZS 6134.13:2006, AS/NZS 6134.14:2006, AS/NZS 6134.15:2006, AS/NZS 6134.16:2006, AS/NZS 6134.17:2006, AS/NZS 6134.18:2006, AS/NZS 6134.19:2006, AS/NZS 6134.20:2006, AS/NZS 6134.21:2006, AS/NZS 6134.22:2006, AS/NZS 6134.23:2006, AS/NZS 6134.24:2006, AS/NZS 6134.25:2006, AS/NZS 6134.26:2006, AS/NZS 6134.27:2006, AS/NZS 6134.28:2006, AS/NZS 6134.29:2006, AS/NZS 6134.30:2006, AS/NZS 6134.31:2006, AS/NZS 6134.32:2006, AS/NZS 6134.33:2006, AS/NZS 6134.34:2006, AS/NZS 6134.35:2006, AS/NZS 6134.36:2006, AS/NZS 6134.37:2006, AS/NZS 6134.38:2006, AS/NZS 6134.39:2006, AS/NZS 6134.40:2006, AS/NZS 6134.41:2006, AS/NZS 6134.42:2006, AS/NZS 6134.43:2006, AS/NZS 6134.44:2006, AS/NZS 6134.45:2006, AS/NZS 6134.46:2006, AS/NZS 6134.47:2006, AS/NZS 6134.48:2006, AS/NZS 6134.49:2006, AS/NZS 6134.50:2006, AS/NZS 6134.51:2006, AS/NZS 6134.52:2006, AS/NZS 6134.53:2006, AS/NZS 6134.54:2006, AS/NZS 6134.55:2006, AS/NZS 6134.56:2006, AS/NZS 6134.57:2006, AS/NZS 6134.58:2006, AS/NZS 6134.59:2006, AS/NZS 6134.60:2006, AS/NZS 6134.61:2006, AS/NZS 6134.62:2006, AS/NZS 6134.63:2006, AS/NZS 6134.64:2006, AS/NZS 6134.65:2006, AS/NZS 6134.66:2006, AS/NZS 6134.67:2006, AS/NZS 6134.68:2006, AS/NZS 6134.69:2006, AS/NZS 6134.70:2006, AS/NZS 6134.71:2006, AS/NZS 6134.72:2006, AS/NZS 6134.73:2006, AS/NZS 6134.74:2006, AS/NZS 6134.75:2006, AS/NZS 6134.76:2006, AS/NZS 6134.77:2006, AS/NZS 6134.78:2006, AS/NZS 6134.79:2006, AS/NZS 6134.80:2006, AS/NZS 6134.81:2006, AS/NZS 6134.82:2006, AS/NZS 6134.83:2006, AS/NZS 6134.84:2006, AS/NZS 6134.85:2006, AS/NZS 6134.86:2006, AS/NZS 6134.87:2006, AS/NZS 6134.88:2006, AS/NZS 6134.89:2006, AS/NZS 6134.90:2006, AS/NZS 6134.91:2006, AS/NZS 6134.92:2006, AS/NZS 6134.93:2006, AS/NZS 6134.94:2006, AS/NZS 6134.95:2006, AS/NZS 6134.96:2006, AS/NZS 6134.97:2006, AS/NZS 6134.98:2006, AS/NZS 6134.99:2006, AS/NZS 6134.100:2006, AS/NZS 6134.101:2006, AS/NZS 6134.102:2006, AS/NZS 6134.103:2006, AS/NZS 6134.104:2006, AS/NZS 6134.105:2006, AS/NZS 6134.106:2006, AS/NZS 6134.107:2006, AS/NZS 6134.108:2006, AS/NZS 6134.109:2006, AS/NZS 6134.110:2006, AS/NZS 6134.111:2006, AS/NZS 6134.112:2006, AS/NZS 6134.113:2006, AS/NZS 6134.114:2006, AS/NZS 6134.115:2006, AS/NZS 6134.116:2006, AS/NZS 6134.117:2006, AS/NZS 6134.118:2006, AS/NZS 6134.119:2006, AS/NZS 6134.120:2006, AS/NZS 6134.121:2006, AS/NZS 6134.122:2006, AS/NZS 6134.123:2006, AS/NZS 6134.124:2006, AS/NZS 6134.125:2006, AS/NZS 6134.126:2006, AS/NZS 6134.127:2006, AS/NZS 6134.128:2006, AS/NZS 6134.129:2006, AS/NZS 6134.130:2006, AS/NZS 6134.131:2006, AS/NZS 6134.132:2006, AS/NZS 6134.133:2006, AS/NZS 6134.134:2006, AS/NZS 6134.135:2006, AS/NZS 6134.136:2006, AS/NZS 6134.137:2006, AS/NZS 6134.138:2006, AS/NZS 6134.139:2006, AS/NZS 6134.140:2006, AS/NZS 6134.141:2006, AS/NZS 6134.142:2006, AS/NZS 6134.143:2006, AS/NZS 6134.144:2006, AS/NZS 6134.145:2006, AS/NZS 6134.146:2006, AS/NZS 6134.147:2006, AS/NZS 6134.148:2006, AS/NZS 6134.149:2006, AS/NZS 6134.150:2006, AS/NZS 6134.151:2006, AS/NZS 6134.152:2006, AS/NZS 6134.153:2006, AS/NZS 6134.154:2006, AS/NZS 6134.155:2006, AS/NZS 6134.156:2006, AS/NZS 6134.157:2006, AS/NZS 6134.158:2006, AS/NZS 6134.159:2006, AS/NZS 6134.160:2006, AS/NZS 6134.161:2006, AS/NZS 6134.162:2006, AS/NZS 6134.163:2006, AS/NZS 6134.164:2006, AS/NZS 6134.165:2006, AS/NZS 6134.166:2006, AS/NZS 6134.167:2006, AS/NZS 6134.168:2006, AS/NZS 6134.169:2006, AS/NZS 6134.170:2006, AS/NZS 6134.171:2006, AS/NZS 6134.172:2006, AS/NZS 6134.173:2006, AS/NZS 6134.174:2006, AS/NZS 6134.175:2006, AS/NZS 6134.176:2006, AS/NZS 6134.177:2006, AS/NZS 6134.178:2006, AS/NZS 6134.179:2006, AS/NZS 6134.180:2006, AS/NZS 6134.181:2006, AS/NZS 6134.182:2006, AS/NZS 6134.183:2006, AS/NZS 6134.184:2006, AS/NZS 6134.185:2006, AS/NZS 6134.186:2006, AS/NZS 6134.187:2006, AS/NZS 6134.188:2006, AS/NZS 6134.189:2006, AS/NZS 6134.190:2006, AS/NZS 6134.191:2006, AS/NZS 6134.192:2006, AS/NZS 6134.193:2006, AS/NZS 6134.194:2006, AS/NZS 6134.195:2006, AS/NZS 6134.196:2006, AS/NZS 6134.197:2006, AS/NZS 6134.198:2006, AS/NZS 6134.199:2006, AS/NZS 6134.200:2006, AS/NZS 6134.201:2006, AS/NZS 6134.202:2006, AS/NZS 6134.203:2006, AS/NZS 6134.204:2006, AS/NZS 6134.205:2006, AS/NZS 6134.206:2006, AS/NZS 6134.207:2006, AS/NZS 6134.208:2006, AS/NZS 6134.209:2006, AS/NZS 6134.210:2006, AS/NZS 6134.211:2006, AS/NZS 6134.212:2006, AS/NZS 6134.213:2006, AS/NZS 6134.214:2006, AS/NZS 6134.215:2006, AS/NZS 6134.216:2006, AS/NZS 6134.217:2006, AS/NZS 6134.218:2006, AS/NZS 6134.219:2006, AS/NZS 6134.220:2006, AS/NZS 6134.221:2006, AS/NZS 6134.222:2006, AS/NZS 6134.223:2006, AS/NZS 6134.224:2006, AS/NZS 6134.225:2006, AS/NZS 6134.226:2006, AS/NZS 6134.227:2006, AS/NZS 6134.228:2006, AS/NZS 6134.229:2006, AS/NZS 6134.230:2006, AS/NZS 6134.231:2006, AS/NZS 6134.232:2006, AS/NZS 6134.233:2006, AS/NZS 6134.234:2006, AS/NZS 6134.235:2006, AS/NZS 6134.236:2006, AS/NZS 6134.237:2006, AS/NZS 6134.238:2006, AS/NZS 6134.239:2006, AS/NZS 6134.240:2006, AS/NZS 6134.241:2006, AS/NZS 6134.242:2006, AS/NZS 6134.243:2006, AS/NZS 6134.244:2006, AS/NZS 6134.245:2006, AS/NZS 6134.246:2006, AS/NZS 6134.247:2006, AS/NZS 6134.248:2006, AS/NZS 6134.249:2006, AS/NZS 6134.250:2006, AS/NZS 6134.251:2006, AS/NZS 6134.252:2006, AS/NZS 6134.253:2006, AS/NZS 6134.254:2006, AS/NZS 6134.255:2006, AS/NZS 6134.256:2006, AS/NZS 6134.257:2006, AS/NZS 6134.258:2006, AS/NZS 6134.259:2006, AS/NZS 6134.260:2006, AS/NZS 6134.261:2006, AS/NZS 6134.262:2006, AS/NZS 6134.263:2006, AS/NZS 6134.264:2006, AS/NZS 6134.265:2006, AS/NZS 6134.266:2006, AS/NZS 6134.267:2006, AS/NZS 6134.268:2006, AS/NZS 6134.269:2006, AS/NZS 6134.270:2006, AS/NZS 6134.271:2006, AS/NZS 6134.272:2006, AS/NZS 6134.273:2006, AS/NZS 6134.274:2006, AS/NZS 6134.275:2006, AS/NZS 6134.276:2006, AS/NZS 6134.277:2006, AS/NZS 6134.278:2006, AS/NZS 6134.279:2006, AS/NZS 6134.280:2006, AS/NZS 6134.281:2006, AS/NZS 6134.282:2006, AS/NZS 6134.283:2006, AS/NZS 6134.284:2006, AS/NZS 6134.285:2006, AS/NZS 6134.286:2006, AS/NZS 6134.287:2006, AS/NZS 6134.288:2006, AS/NZS 6134.289:2006, AS/NZS 6134.290:2006, AS/NZS 6134.291:2006, AS/NZS 6134.292:2006, AS/NZS 6134.293:2006, AS/NZS 6134.294:2006, AS/NZS 6134.295:2006, AS/NZS 6134.296:2006, AS/NZS 6134.297:2006, AS/NZS 6134.298:2006, AS/NZS 6134.299:2006, AS/NZS 6134.300:2006, AS/NZS 6134.301:2006, AS/NZS 6134.302:2006, AS/NZS 6134.303:2006, AS/NZS 6134.304:2006, AS/NZS 6134.305:2006, AS/NZS 6134.306:2006, AS/NZS 6134.307:2006, AS/NZS 6134.308:2006, AS/NZS 6134.309:2006, AS/NZS 6134.310:2006, AS/NZS 6134.311:2006, AS/NZS 6134.312:2006, AS/NZS 6134.313:2006, AS/NZS 6134.314:2006, AS/NZS 6134.315:2006, AS/NZS 6134.316:2006, AS/NZS 6134.317:2006, AS/NZS 6134.318:2006, AS/NZS 6134.319:2006, AS/NZS 6134.320:2006, AS/NZS 6134.321:2006, AS/NZS 6134.322:2006, AS/NZS 6134.323:2006, AS/NZS 6134.324:2006, AS/NZS 6134.325:2006, AS/NZS 6134.326:2006, AS/NZS 6134.327:2006, AS/NZS 6134.328:2006, AS/NZS 6134.329:2006, AS/NZS 6134.330:2006, AS/NZS 6134.331:2006, AS/NZS 6134.332:2006, AS/NZS 6134.333:2006, AS/NZS 6134.334:2006, AS/NZS 6134.335:2006, AS/NZS 6134.336:2006, AS/NZS 6134.337:2006, AS/NZS 6134.338:2006, AS/NZS 6134.339:2006, AS/NZS 6134.340:2006, AS/NZS 6134.341:2006, AS/NZS 6134.342:2006, AS/NZS 6134.343:2006, AS/NZS 6134.344:2006, AS/NZS 6134.345:2006, AS/NZS 6134.346:2006, AS/NZS 6134.347:2006, AS/NZS 6134.348:2006, AS/NZS 6134.349:2006, AS/NZS 6134.350:2006, AS/NZS 6134.351:2006, AS/NZS 6134.352:2006, AS/NZS 6134.353:2006, AS/NZS 6134.354:2006, AS/NZS 6134.355:2006, AS/NZS 6134.356:2006, AS/NZS 6134.357:2006, AS/NZS 6134.358:2006, AS/NZS 6134.359:2006, AS/NZS 6134.360:2006, AS/NZS 6134.361:2006, AS/NZS 6134.362:2006, AS/NZS 6134.363:2006, AS/NZS 6134.364:2006, AS/NZS 6134.365:2006, AS/NZS 6134.366:2006, AS/NZS 6134.367:2006, AS/NZS 6134.368:2006, AS/NZS 6134.369:2006, AS/NZS 6134.370:2006, AS/NZS 6134.371:2006, AS/NZS 6134.372:2006, AS/NZS 6134.373:2006, AS/NZS 6134.374:2006, AS/NZS 6134.375:2006, AS/NZS 6134.376:2006, AS/NZS 6134.377:2006, AS/NZS 6134.378:2006, AS/NZS 6134.379:2006, AS/NZS 6134.380:2006, AS/NZS 6134.381:2006, AS/NZS 6134.382:2006, AS/NZS 6134.383:2006, AS/NZS 6134.384:2006, AS/NZS 6134.385:2006, AS/NZS 6134.386:2006, AS/NZS 6134.387:2006, AS/NZS 6134.388:2006, AS/NZS 6134.389:2006, AS/NZS 6134.390:2006, AS/NZS 6134.391:2006, AS/NZS 6134.392:2006, AS/NZS 6134.393:2006, AS/NZS 6134.394:2006, AS/NZS 6134.395:2006, AS/NZS 6134.396:2006, AS/NZS 6134.397:2006, AS/NZS 6134.398:2006, AS/NZS 6134.399:2006, AS/NZS 6134.400:2006, AS/NZS 6134.401:2006, AS/NZS 6134.402:2006, AS/NZS 6134.403:2006, AS/NZS 6134.404:2006, AS/NZS 6134.405:2006, AS/NZS 6134.406:2006, AS/NZS 6134.407:2006, AS/NZS 6134.408:2006, AS/NZS 6134.409:2006, AS/NZS 6134.410:2006, AS/NZS 6134.411:2006, AS/NZS 6134.412:2006, AS/NZS 6134.413:2006, AS/NZS 6134.414:2006, AS/NZS 6134.415:2006, AS/NZS 6134.416:2006, AS/NZS 6134.417:2006, AS/NZS 6134.418:2006, AS/NZS 6134.419:2006, AS/NZS 6134.420:2006, AS/NZS 6134.421:2006, AS/NZS 6134.422:2006, AS/NZS 6134.423:2006, AS/NZS 6134.424:2006, AS/NZS 6134.425:2006, AS/NZS 6134.426:2006, AS/NZS 6134.427:2006, AS/NZS 6134.428:2006, AS/NZS 6134.429:2006, AS/NZS 6134.430:2006, AS/NZS 6134.431:2006, AS/NZS 6134.432:2006, AS/NZS 6134.433:2006, AS/NZS 6134.434:2006, AS/NZS 6134.435:2006, AS/NZS 6134.436:2006, AS/NZS 6134.437:2006, AS/NZS 6134.438:2006, AS/NZS 6134.439:2006, AS/NZS 6134.440:2006, AS/NZS 6134.441:2006, AS/NZS 6134.442:2006, AS/NZS 6134.443:2006, AS/NZS 6134.444:2006, AS/NZS 6134.445:2006, AS/NZS 6134.446:2006, AS/NZS 6134.447:2006, AS/NZS 6134.448:2006, AS/NZS 6134.449:2006, AS/NZS 6134.450:2006, AS/NZS 6134.451:2006, AS/NZS 6134.452:2006, AS/NZS 6134.453:2006, AS/NZS 6134.454:2006, AS/NZS 6134.455:2006, AS/NZS 6134.456:2006, AS/NZS 6134.457:2006, AS/NZS 6134.458:2006, AS/NZS 6134.459:2006, AS/NZS 6134.460:2006, AS/NZS 6134.461:2006, AS/NZS 6134.462:2006, AS/NZS 6134.463:2006, AS/NZS 6134.464:2006, AS/NZS 6134.465:2006, AS/NZS 6134.466:2006, AS/NZS 6134.467:2006, AS/NZS 6134.468:2006, AS/NZS 6134.469:2006, AS/NZS 6134.470:2006, AS/NZS 6134.471:2006, AS/NZS 6134.472:2006, AS/NZS 6134.473:2006, AS/NZS 6134.474:2006, AS/NZS 6134.475:2006, AS/NZS 6134.476:2006, AS/NZS 6134.4	



LED Wall Pack Light

WPA..... 1-2P



WPB..... 3-4P



WPB2..... 5-6P



WPC2..... 7-8P



WPD..... 9-10P



WPD2..... 11-12P



LED Parking Lot/Shoe Box Light

PLB..... 13-14P



STL..... 15-16P



PL01..... 17-18P



LED High Bay Light

HBX..... 19-20P



HBS..... 21-22P



LED Barn/Yard Light

YDA..... 23-24P



LED Canopy Light

CNPA/B..... 25-26P



LED Flood Light

FL35..... 27-28P



FL30..... 29-30P



LED Wall Pack Light / WPA Series



Key Features


- High performance LED fixture 120lm/W
- Unique design of heat sink, energy-saving
- Stable and durable, easy installment and maintenance
- Photocell is available
- Replacing 80W-150W Metal Halide
- DLC ETL FCC IC+philips LED+5 years warranty




Photocell for
12W&13W



12W & 13W



12W&13W

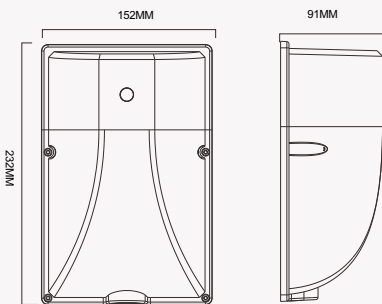

18W&26W



Application pathway, hallway, perimeter, patio, entrance, stairway, house, garden, garage, yard, warehouse, factory, store, street, porch

Specification

Item Number	Wattage	Voltage	IP Rated	CCT	CRI	Lumen	Certificate
ML - WPA-12W	12W	100-277Vac	IP65	3000K-6000K	Ra>70	1440lm	DLC ETL
ML - WPA-13W	13W	100-277Vac	IP65	3000K-6000K	Ra>70	1560lm	DLC ETL FCC IC
ML - WPA-18W	18W	100-277Vac	IP65	3000K-6000K	Ra>70	2160lm	DLC ETL FCC IC
ML - WPA-26W	26W	100-277Vac	IP65	3000K-6000K	Ra>70	3120lm	DLC ETL

LED Wall Pack Light

WPB Series /



Application pathway, hallway, perimeter, patio, entrance, stairway, house, garden, garage, yard, warehouse, factory, store, street, porch



Photocell 1 for 42W&60W



Photocell 2 for 80W-130W



Vandal Guard



Photocell 1



Photocell 2



Shorting Cap

Key Features

- High performance LED fixture 120 Lm/W
- Heavy-duty cast aluminum housing
- Stable and durable, easy installment and maintenance
- Photocell is available
- Replacing 125W-500W Metal Halide
- DLC ETL+philips LED+5 years warranty

Certificate



PC Lens

Glass Lens

Specification

Item Number	Wattage	Voltage	IP Rated	CCT	CRI	Lumen	Certificate
ML - WPB-42W	42W	100-277Vac	IP65	3000K-6000K	Ra>70	5040lm	DLC ETL
ML - WPB-60W	60W	100-277Vac	IP65	3000K-6000K	Ra>70	7200lm	DLC ETL
ML - WPB-60WHV	60W	100-277Vac	IP65	3000K-6000K	Ra>70	7200lm	DLC ETL
ML - WPB-80W	80W	100-277Vac	IP65	3000K-6000K	Ra>70	9600lm	DLC ETL
ML - WPB-100W	100W	100-277Vac	IP65	3000K-6000K	Ra>70	12000lm	DLC ETL
ML - WPB-120W	120W	100-277Vac	IP65	3000K-6000K	Ra>70	14400lm	DLC ETL
ML - WPB-130W	130W	100-277Vac	IP65	3000K-6000K	Ra>70	15600lm	DLC ETL


LED Wall Pack Light / WPB2 Series

Key Features

- High performance LED fixture 120 Lm/W
- Heavy-duty cast aluminum housing
- Stable and durable, easy installment and maintenance
- Photocell is available
- Replacing 125W-500W Metal Halide
- DLC ETL+philips LED+5 years warranty



Fixture Dimension

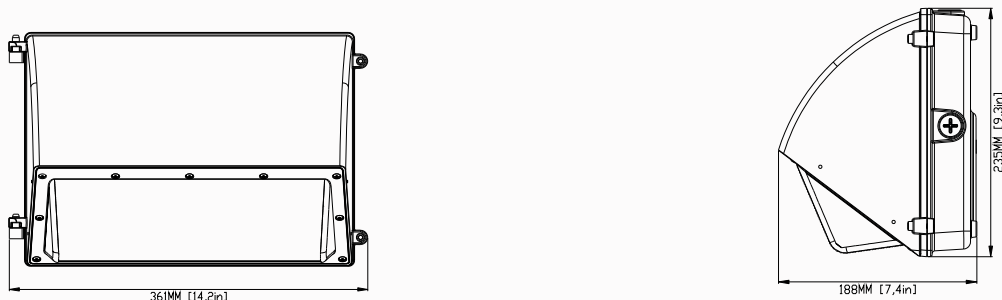

Application pathway, hallway, perimeter, patio, entrance, stairway, house, garden, garage, yard, warehouse, factory, store, street, porch

Specification


Item Number	Wattage	Voltage	IP Rated	CCT	CRI	Lumen	Certificate
ML - WPB2-42W	42W	100-277Vac	IP65	3000K-6000K	Ra>70	5040lm	DLC ETL
ML - WPB2-60W	60W	100-277Vac	IP65	3000K-6000K	Ra>70	7200lm	DLC ETL
ML - WPB2-80W	80W	100-277Vac	IP65	3000K-6000K	Ra>70	9600lm	DLC ETL
ML - WPB2-100W	100W	100-277Vac	IP65	3000K-6000K	Ra>70	12000lm	DLC ETL
ML - WPB2-120W	120W	100-277Vac	IP65	3000K-6000K	Ra>70	14400lm	DLC ETL

LED Wall Pack Light / WPC2 Series



Key Features


- High Performance LED Fixture 120Lm/W
- Heavy-duty Cast Aluminum Housing
- Surface Mounting with Junction Box
- Replacing 125w to 400w Metal Halide
- DLC ETL+Philips LED+5 Years Warranty

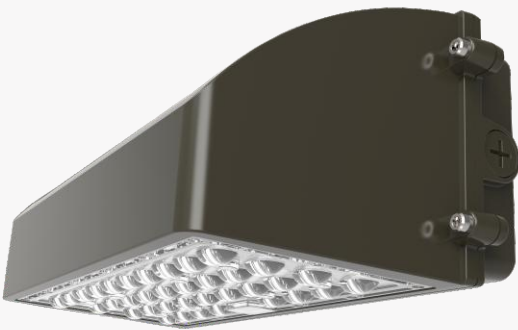



Specification

• Item Number	Wattage	Voltage	IP Rated	CCT	CRI	Lumen	Certificate
• ML - WPC2-42W	42W	100-277Vac	IP65	3000K-6000K	Ra>70	5040lm	DLC ETL
• ML - WPC2-60W	60W	100-277Vac	IP65	3000K-6000K	Ra>70	7200lm	DLC ETL
• ML - WPC2-80W	80W	100-277Vac	IP65	3000K-6000K	Ra>70	9600lm	DLC ETL
• ML - WPC2-100W	100W	100-277Vac	IP65	3000K-6000K	Ra>70	12000lm	DLC ETL

• Lighting Distribution Curve

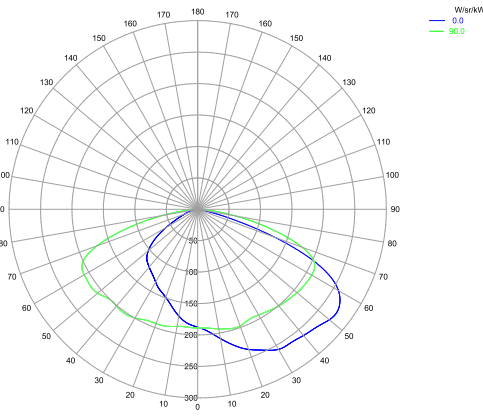

Fixture Dimension

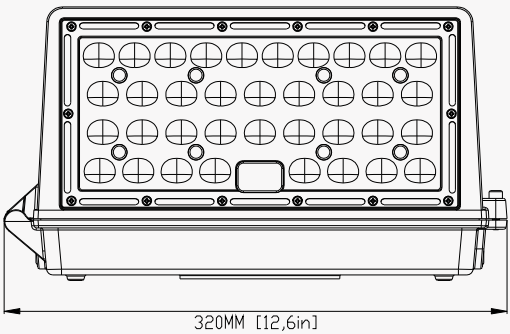

LED Wall Pack Light / WPD Series




Key Features


- High Performance LED Fixture 120Lm/W
- 0-90° or 0-180°Mounting Angle optional
- Photocell is available
- Heavy-duty Cast Aluminum Housing
- Replacing 75W to 250W Metal Halide
- DLC ETL+Philips LED+5 Years Warranty

Lighting Distribution Curve

WPD SERIES / 20W-80W

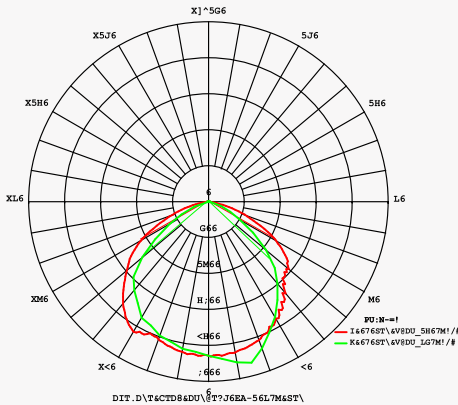

Fixture Dimension

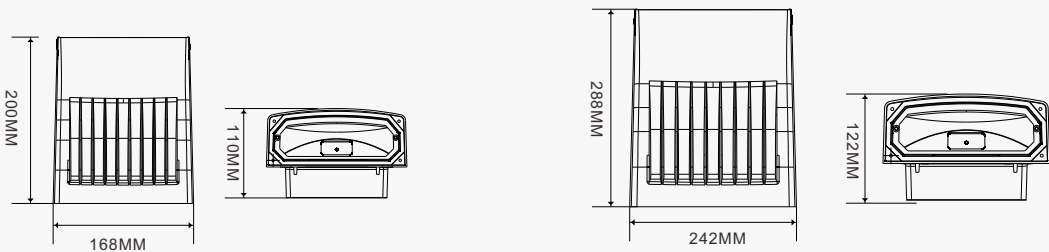

Application

pathway, hallway, perimeter, patio, entrance, stairway, house, garden, garage, yard, warehouse, factory, store, street, porch

Specification

Item Number	Wattage	Voltage	IP Rated	CCT	CRI	Lumen	Certificate
ML - WPD-20W	20W	100-277Vac	IP65	3000K-6000K	Ra>70	2400lm	DLC ETL
ML - WPD-30W	30W	100-277Vac	IP65	3000K-6000K	Ra>70	3600lm	DLC ETL
ML - WPD-60W	60W	100-277Vac	IP65	3000K-6000K	Ra>70	7200lm	DLC ETL
ML - WPD-80W	80W	100-277Vac	IP65	3000K-6000K	Ra>70	9600lm	DLC ETL

LED Wall Pack Light
WPD2 Series /

Key Features

- High Performance LED Fixture 120Lm/W

0-90° or 0-180°Mounting Angle optional

Photocell is available
- Heavy-duty Cast Aluminum Housing

Replacing 75W to 250W Metal Halide

DLC ETL+Philips LED+5 Years Warranty


CERTIFICATE




FULL-CUTOFF




Fixture Dimension and Lighting Distribution Curve

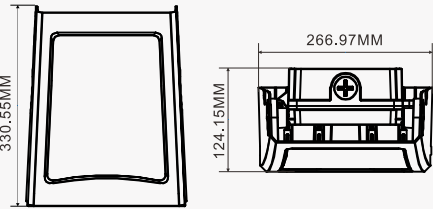


100W/120W

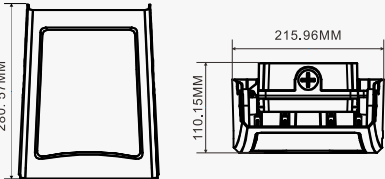

60W/80W



20W/40W




Distribution Curve

Specification

Item Number	Wattage	Voltage	IP Rated	CCT	CRI	Lumen	Certificate
ML - WPB2-20W	20W	100-277Vac	IP65	3000K-6000K	Ra>70	2400lm	DLC ETL
ML - WPB2-40W	40W	100-277Vac	IP65	3000K-6000K	Ra>70	4800lm	DLC ETL
ML - WPB2-60W	60W	100-277Vac	IP65	3000K-6000K	Ra>70	7200lm	DLC ETL
ML - WPB2-80W	80W	100-277Vac	IP65	3000K-6000K	Ra>70	9600lm	DLC ETL
ML - WPB2-100W	100W	100-277Vac	IP65	3000K-6000K	Ra>70	12000lm	DLC ETL
ML - WPB2-100W	120W	100-277Vac	IP65	3000K-6000K	Ra>70	14400lm	DLC ETL

LED PARKING LOT LIGHT / PLB Series

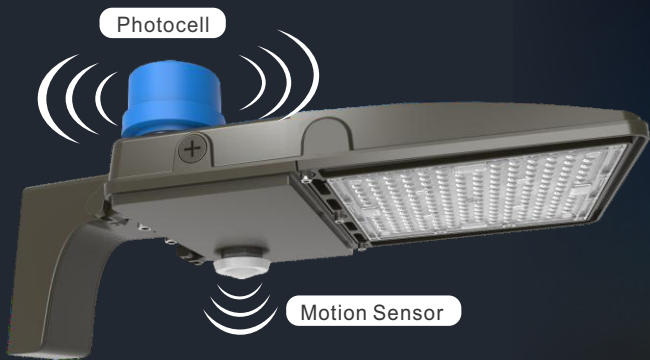

Key Features


- High Performance LED Fixture 165Lm/W
- 5 Multiple Mounting Options
- 3 Different Light Distribution
- Replacing 300w to 1000w Metal Halide
- DLC ETL+Philips LED Chips
- IP65+5 Years Warranty



Mount Bracket



Light Distribution

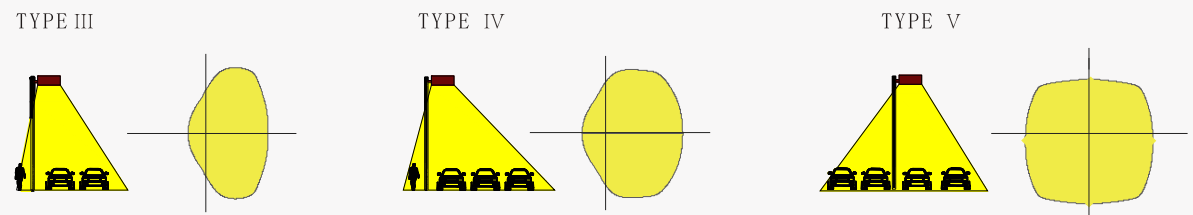

Specification

Item Number	Wattage	Voltage	IP Rated	CCT	CRI	Lumen	Certificate
MLPLB75W277	75W	100-277Vac	IP65	3000K-6000K	Ra>70	9750lm	DLC ETL
MLPLB100W277	100W	100-277Vac	IP65	3000K-6000K	Ra>70	13000lm	DLC ETL
MLPLB150W277	150W	100-277Vac	IP65	3000K-6000K	Ra>70	19500lm	DLC ETL
MLPLB200W277	200W	100-277Vac	IP65	3000K-6000K	Ra>70	26000lm	DLC ETL
MLPLB240W277	2400W	100-277Vac	IP65	3000K-6000K	Ra>70	31200lm	DLC ETL
MLPLB300W277	300W	100-277Vac	IP65	3000K-6000K	Ra>70	39000lm	DLC ETL
MLPLB75W480	75W	220-480Vac	IP65	3000K-6000K	Ra>70	9750lm	DLC ETL
MLPLB100W480	100W	220-480Vac	IP65	3000K-6000K	Ra>70	13000lm	DLC ETL
MLPLB150W480	150W	220-480Vac	IP65	3000K-6000K	Ra>70	19500lm	DLC ETL
MLPLB200W480	200W	220-480Vac	IP65	3000K-6000K	Ra>70	26000lm	DLC ETL
MLPLB240W480	240W	220-480Vac	IP65	3000K-6000K	Ra>70	31200lm	DLC ETL
MLPLB300W480	300W	220-480Vac	IP65	3000K-6000K	Ra>70	39000lm	DLC ETL

LED Street Light / STL Series



New Arrival


Key Features

- High Performance LED Fixture 135Lm/W
- 3 Different Light Distribution
- Replacing 300w to 1000w Metal Halide
- DLC+ETL+CE ROHS+Philips LED+IP65+5 Years Warranty





Specification

Item Number	Wattage	Voltage	IP Rated	CCT	CRI	Lumen	Certificate
ML - STL-50W	50W	100-277Vac	IP65	3000K-6000K	Ra>70	6750lm	DLC ETL
ML - STL-70W	70W	100-277Vac	IP65	3000K-6000K	Ra>70	9450lm	DLC ETL
ML - STL-100W	100W	100-277Vac	IP65	3000K-6000K	Ra>70	13500lm	DLC ETL
ML - STL-150W	150W	100-277Vac	IP65	3000K-6000K	Ra>70	20250lm	DLC ETL

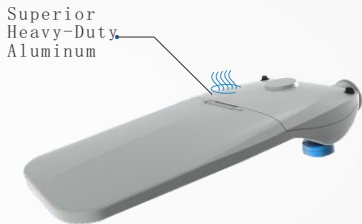

Light Distribution

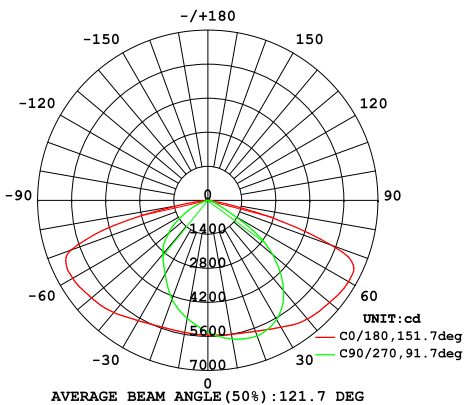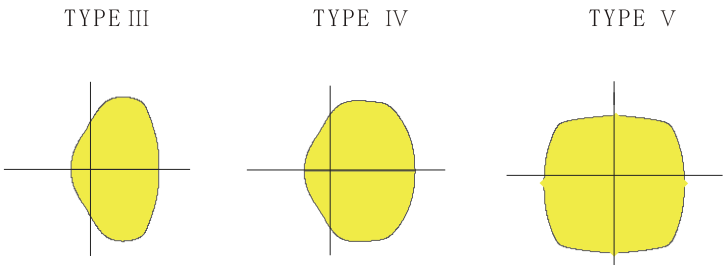



LED Parking Lot Light PL01 Series /

Key Features


- High Performance LED Fixture 120Lm/W
- 4 Multiple Mounting Options
- 3 Different Light Distribution
- Replacing 400w to 1000w Metal Halide
- DLC ETL+Philips LED+Inventronics+5 Years Warran



Specification

Item Number	Wattage	Voltage	IP Rated	CCT	CRI	Lumen	Certificate
• ML-PL01-100W-277	100W	100-277Vac	IP65	3000K-6000K	Ra>70	12000lm	DLC ETL
• ML-PL01-150W-277	150W	100-277Vac	IP65	3000K-6000K	Ra>70	18000lm	DLC ETL
• ML-PL01-200W-277	200W	100-277Vac	IP65	3000K-6000K	Ra>70	24000lm	DLC ETL
• ML-PL01-240W-277	240W	100-277Vac	IP65	3000K-6000K	Ra>70	28800lm	DLC ETL
• ML-PL01-300W-277	300W	100-277Vac	IP65	3000K-6000K	Ra>70	36000lm	DLC ETL
• ML-PL01-100W-480	100W	220-480Vac	IP65	3000K-6000K	Ra>70	12000lm	DLC ETL
• ML-PL01-150W-480	150W	220-480Vac	IP65	3000K-6000K	Ra>70	18000lm	DLC ETL
• ML-PL01-200W-480	200W	220-480Vac	IP65	3000K-6000K	Ra>70	24000lm	DLC ETL
• ML-PL01-240W-480	240W	220-480Vac	IP65	3000K-6000K	Ra>70	28800lm	DLC ETL
• ML-PL01-300W-480	300W	220-480Vac	IP65	3000K-6000K	Ra>70	36000lm	DLC ETL

4 Type Multiple Mounting Options

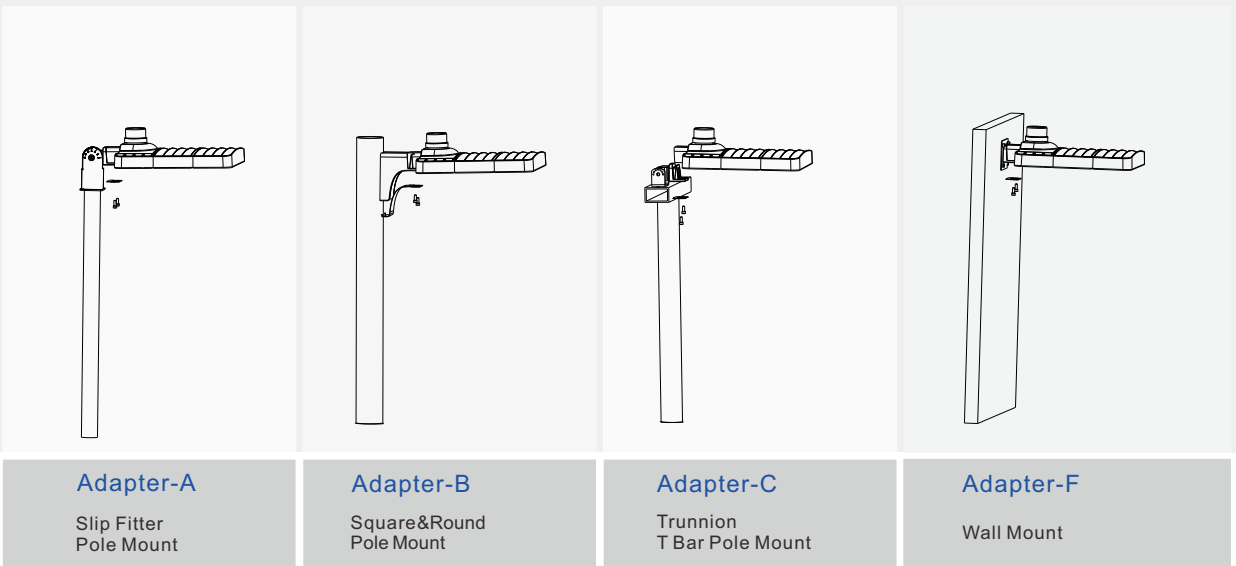



UFO LED High Bay Light HBX Series /

Key Features

- High Performance LED Fixture 160lm/w
- 1-10V Dimmable Optional
- Easy Installation and Wiring
- 4KA/KV Surge Protection Included
- Photometrics 60° 90° 110°
- 5 Years warranty



Arc Lens Reduce Glare Effectively



Specification

Item Number	Wattage	Voltage	IP Rated	CCT	CRI	Lumen	Certificate
• ML-HBX-100W-P	100W	100-277Vac	IP65	3000K-6000K	Ra>70	14000lm	DLC ETL CE ROHS
• ML-HBX-150W-P	150W	100-277Vac	IP65	3000K-6000K	Ra>70	21000lm	DLC ETL CE ROHS
• ML-HBX-200W-P	200W	100-277Vac	IP65	3000K-6000K	Ra>70	28000lm	DLC ETL CE ROHS
• ML-HBX-240W-P	240W	100-277Vac	IP65	3000K-6000K	Ra>70	33600lm	DLC ETL CE ROHS
• ML-HBX-100W-A	100W	100-277Vac	IP65	3000K-6000K	Ra>70	16000lm	DLC ETL CE ROHS
• ML-HBX-150W-A	150W	100-277Vac	IP65	3000K-6000K	Ra>70	24000lm	DLC ETL CE ROHS
• ML-HBX-200W-A	200W	100-277Vac	IP65	3000K-6000K	Ra>70	32000lm	DLC ETL CE ROHS
• ML-HBX-240W-A	240W	100-277Vac	IP65	3000K-6000K	Ra>70	38400lm	DLC ETL CE ROHS





UFO LED High Bay Light / HBX Series



Key Features

- High Performance LED Fixture 130Lm/W
- Integrated Driver and New Fin-Radiator Better Heat Dissipation
- Replacing 400w to 800w Metal Halide
- CE RoHS + Philips LED+5 Years Warranty
- Sosen Driver

Two Types Of
Light Distribution

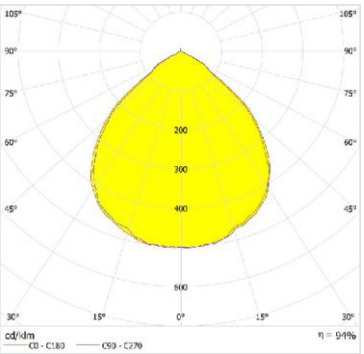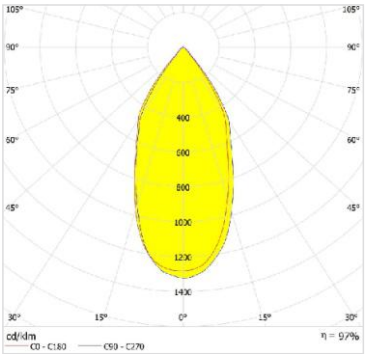

Specification

Item Number	Wattage	Voltage	IP Rated	CCT	CRI	Lumen	Certificate
ML - HBS-100W	100W	100-277Vac	IP65	3000K-6000K	Ra>70	13000lm	CE ROHS
ML - HBS-150W	150W	100-277Vac	IP65	3000K-6000K	Ra>70	19500lm	CE ROHS
ML - HBS-200W	200W	100-277Vac	IP65	3000K-6000K	Ra>70	26000lm	CE ROHS
ML - HBS-240W	240W	100-277Vac	IP65	3000K-6000K	Ra>70	31200lm	CE ROHS



ML-HBS-100W

Lamp Reflector: AL/PC
LED Driver: Meanwell /Sosen
Color: Black & White



ML-HBS-150W

Lamp Reflector: AL/PC
LED Driver: Meanwell /Sosen
Color: Black & White



ML-HBS-200W

Lamp Reflector: AL/PC
LED Driver: Meanwell /Sosen
Color: Black & White



ML-HBS-240W

Lamp Reflector: AL/PC
LED Driver: Meanwell /Sosen
Color: Black & White

LED Barn/Yard Light / YDA Series


Key Features

- 120lm/w high efficiency for fixture;
- Photocell and surge protection devices are available
- Protective powder coating for lasting appearance.
- All-in-one heatsink with perfect structure maxim heat dissipation.
- Replacing 200W-250W metal Halide
- DLC ETL +philips LED+ 5 years warranty




Specification

Item Number	Wattage	Voltage	IP Rated	CCT	CRI	Lumen	Certificate
ML - YDA-42W	42W	100-277Vac	IP65	3000K-6000K	Ra>70	5040lm	DLC ETL
ML - YDA-58W	58W	100-277Vac	IP65	3000K-6000K	Ra>70	6960lm	DLC ETL

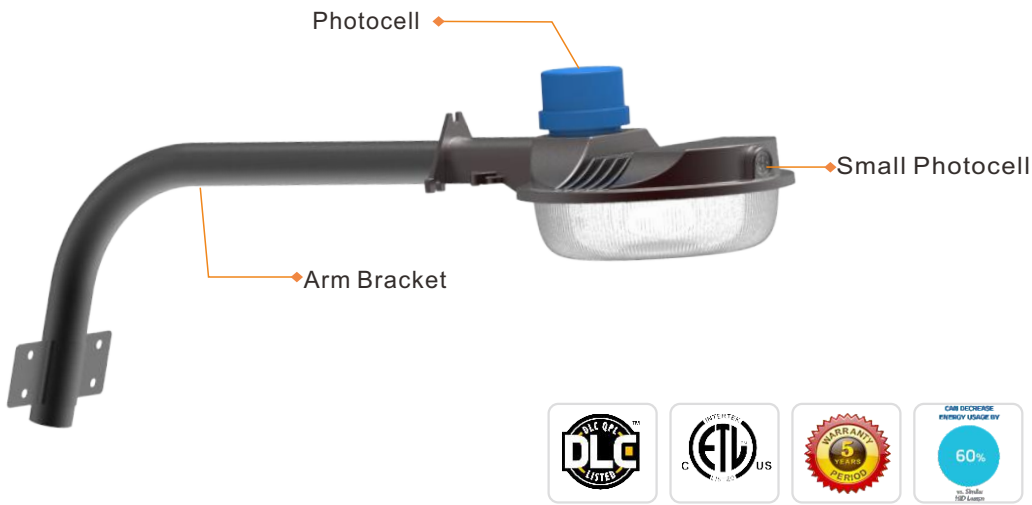


Application backyard, farm, barn, pathway, walkway, house, garage, warehouse, store, street.

Mounting




Direct Mounting




Arm Mounting

Lighting Distribution Curve





LED Canopy Light / CNPA/B Series



Key Features

- High Performance LED Fixture 110Lm/W
- Replacing 175w to 500w Metal Halide
- Surface J-Box or Pendant Mounting Optional
- DLC ETL+Philips LED+IP65+5 Years Warranty



ML-CNPA
50W-120W

Lamp Reflector: AL/PC
LED Driver: Minglight
Color: Brow & White




ML-CNPB
50W-120W

Lamp Reflector: AL/PC
LED Driver: Minglight
Color: Brow & White


Specification

Item Number	Wattage	Voltage	IP Rated	CCT	CRI	Lumen	Certificate
ML-CNPA-50W	50W	100-277Vac	IP65	3000K-6000K	Ra>70	5500lm	DLC ETL CE ROHS
ML-CNPA-75W	75W	100-277Vac	IP65	3000K-6000K	Ra>70	8300lm	DLC ETL CE ROHS
ML-CNPA-100W	100W	100-277Vac	IP65	3000K-6000K	Ra>70	11000lm	DLC ETL CE ROHS
ML-CNPA-120W	120W	100-277Vac	IP65	3000K-6000K	Ra>70	13200lm	DLC ETL CE ROHS
ML-CNPB-50W	50W	100-277Vac	IP65	3000K-6000K	Ra>70	5500lm	DLC ETL CE ROHS
ML-CNPB-75W	75W	100-277Vac	IP65	3000K-6000K	Ra>70	8300lm	DLC ETL CE ROHS
ML-CNPB-100W	100W	100-277Vac	IP65	3000K-6000K	Ra>70	11000lm	DLC ETL CE ROHS
ML-CNPB-120W	120W	100-277Vac	IP65	3000K-6000K	Ra>70	13200lm	DLC ETL CE ROHS

Lighting Distribution Curve



CNPA



CNPB

LED Flood Light / FL35 Series

Key Features

- 120lm/w high efficiency for fixture
- North America Standard products
- Multiple mounting options
- Replacing 175w to 250w metal halide
- DLC ETL CE RoHS
- Philips LED+5 years warranty



200W Mountomg Optional

Trunnion Mount
200W



Slip Fitter
200W



Yoke Bracket
200W



Specification

Item Number	Wattage	Voltage	IP Rated	CCT	CRI	Lumen	Certificate
• ML-FL35-15W	15W	100-277Vac	IP65	3000K-6000K	Ra>70	1800lm	DLC ETL CE ROHS
• ML-FL35-26W	26W	100-277Vac	IP65	3000K-6000K	Ra>70	3120lm	DLC ETL CE ROHS
• ML-FL35-50W	50W	100-277Vac	IP65	3000K-6000K	Ra>70	6000lm	DLC ETL CE ROHS
• ML-FL35-80W	80W	100-277Vac	IP65	3000K-6000K	Ra>70	9600lm	DLC ETL CE ROHS
• ML-FL35-100W	100W	100-277Vac	IP65	3000K-6000K	Ra>70	12000lm	DLC ETL CE ROHS
• ML-FL35-150W	150W	100-277Vac	IP65	3000K-6000K	Ra>70	18000lm	DLC ETL CE ROHS
• ML-FL35-200W	200W	100-277Vac	IP65	3000K-6000K	Ra>70	24000lm	DLC ETL CE ROHS


LED Flood Light / FL30 Series

Key Features

- 120lm/w high efficiency for fixture
 - North America Standard products
 - Multiple mounting options
- Replacing 175w to 250w metal halide
 - DLC ETL CE RoHS
 - Philips LED+5 years warranty



Knuckle
Trunnion
Trestle

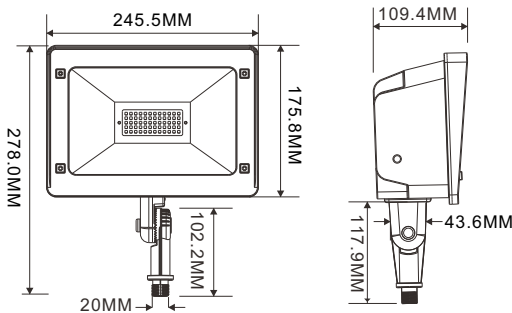

Specification

Item Number	Wattage	Voltage	IP Rated	CCT	CRI	Lumen	Certificate
ML - FL30-30W	30W	100-277Vac	IP65	3000K-6000K	Ra>70	3600lm	DLC ETL CE ROHS
ML - FL30-50W	50W	100-277Vac	IP65	3000K-6000K	Ra>70	6000lm	DLC ETL CE ROHS