



INNOVATION GENE

BETTER ILLUMINATION

GREAT VALUE



SHENZHEN MINGLIGHT CO., LTD



Tel: +86 755 2834 3760

Fax: +86 755 2834 4134

[Http://www.minglight.com.cn](http://www.minglight.com.cn)

[Http://www.minglight.en.alibaba.com](http://www.minglight.en.alibaba.com)

Factory Address:

Building A, Factory 3, No. 8, Cichang Road, Yuanshan Street, Baoan
Community, Longgang, Shenzhen, Guangdong, China, 518115

E-mail: sales@minglight.com.cn; sales@minglight.net

About us

Minglight established in 2006, is one of the leading manufacturers of LED Lights Industry, Located in Shenzhen, Guangdong, enjoy convenient transportation.

With workshop of 11,000 square meters and 120+ workforces, monthly production capacity is up to 100,000 Units.

Our Advantages

Minglight mainly manufacture LED High Bay Light, LED Parking Lot Light, LED Flood Light, LED Wall Pack Light, LED Street Light, LED Canopy Light and LED Barn Light etc. Besides, we are making great efforts to develop new products to meet different requirements, and OEM&ODM available.

Our company has integrating sphere testing, IES testing, Aging Testing etc equipment to strictly control the product quality.

Products comply with ETL, DLC, CE, ROHS, PSE, FCC, GS, SAA and TUV certifications, it's popular in North America, Latin America, Europe, Australia, Middle East and Japan market.

The factory have passed ISO 9001 Quality System in 2010, Minglight have Strong R & D Capability, Advanced Manufacturing Facility and Professional Sales Team. We always focus on high quality product with best possible value and save money for customer as well as Creating Green World.

Adhering to the business principle of mutual benefits, we have had a reliable reputation among our customers because of our professional services, quality products and competitive prices.

Warmly welcome customers from at home and abroad to establish cooperation and create a bright future with us together.

Light illuminates the darkness and bring peace and love, Minglight is devoted to the brightest star in the sky.



CERTIFICATE

DesignLights Consortium

Classification	Premium
Primary Use	High-Bay Luminaires for Commercial and Industrial Buildings
Reported Input Wattage	240.9 W
Reported Light Output	35081 lm
Reported CCT	5000 K
Reported CRI (Ra)	71
Product ID	PJGBBV7
DLC Family Code	BBBFXL
Listing Status	Listed
Date Qualified	2022-01-06

PRODUCT INFORMATION VIEW DETAILS

Qualified Product List	Solid State Lighting
Technical Requirements Version	5.1
Product ID	PJGBBV7
Manufacturer	Shenzhen Minglight Co., Ltd
Brand	Minglight
Model Number	ML-HBC-240W-50K-[D,P,S,Blank]
Parent	No
Classification	Premium
DLC Family Code	BBBFXL
Input Power Type	AC

PRODUCT CATEGORIZATION VIEW DETAILS

Category	Indoor Luminaires
General Application	High-Bay
Primary Use Designation	High-Bay Luminaires for Commercial and Industrial Buildings

PRODUCT CAPABILITIES VIEW DETAILS

Integral Controls	Yes
Dimming Capability and Range	Continuous Dimming to 10% or below
Integral Control Capability	No Control Capability
Sensor Type	Exterior Photocell, Occupancy Sensing

certificate

Has passed performance test and quality assurance test

DesignLights Consortium

Classification	Premium
Primary Use	Outdoor Full-Cutoff Wall-Mounted Area Luminaires
Reported Input Wattage	57.1 W
Reported Light Output	7680 lm
Reported CCT	3000 K
Reported CRI (Ra)	71
Product ID	P5DKYSHX
DLC Family Code	TTTVXG
Listing Status	Listed
Date Qualified	2022-01-27

PRODUCT INFORMATION VIEW DETAILS

Qualified Product List	Solid State Lighting
Technical Requirements Version	5.1
Product ID	P5DKYSHX
Manufacturer	Shenzhen Minglight Co., Ltd
Brand	Minglight
Model Number	ML-WPD2-60W-30K-[D,P,S,Blank]
Parent	No
Classification	Premium
DLC Family Code	TTTVXG
Input Power Type	AC

PRODUCT CATEGORIZATION VIEW DETAILS

Category	Outdoor Luminaires
General Application	Mid Output
Primary Use Designation	Outdoor Full-Cutoff Wall-Mounted Area Luminaires

PRODUCT CAPABILITIES VIEW DETAILS

Integral Controls	Yes
Dimming Capability and Range	Continuous Dimming to 10% or below
Integral Control Capability	No Control Capability
Sensor Type	Occupancy Sensing

certificate

Has passed performance test and quality assurance test

DesignLights Consortium

Classification	Premium
Primary Use	Outdoor Pole/Arm-Mounted Area and Roadway Luminaires
Reported Input Wattage	147.3 W
Reported Light Output	21430 lm
Reported CCT	5000 K
Reported CRI (Ra)	71
Product ID	PPAXHP3M
DLC Family Code	LLCCK
Listing Status	Listed
Date Qualified	2022-02-01

PRODUCT INFORMATION VIEW DETAILS

Qualified Product List	Solid State Lighting
Technical Requirements Version	5.1
Product ID	PPAXHP3M
Manufacturer	Shenzhen Minglight Co., Ltd
Brand	Minglight
Model Number	PLC150W-50K-[D,P,S,Blank]
Parent	No
Classification	Premium
DLC Family Code	LLCCK
Input Power Type	AC

PRODUCT CATEGORIZATION VIEW DETAILS

Category	Outdoor Luminaires
General Application	High Output
Primary Use Designation	Outdoor Pole/Arm-Mounted Area and Roadway Luminaires

PRODUCT CAPABILITIES VIEW DETAILS

Integral Controls	Yes
Dimming Capability and Range	Continuous Dimming to 10% or below
Integral Control Capability	No Control Capability
Sensor Type	Exterior Photocell, Occupancy Sensing

certificate

Has passed performance test and quality assurance test

CERTIFICATE
of Conformity
EC Council Directive 2014/30/EU

Registration No.: CCT20160423012E
Report No.: 20160423012E

Applicant: SHENZHEN MINGLIGHT CO., LTD.
Building No. 2, Nan Long Industrial Park, Zhen Pu Ling, Long Gang District, Shenzhen, Guangdong, China 518116
Manufacturer: SHENZHEN MINGLIGHT CO., LTD.
Building No. 2, Nan Long Industrial Park, Zhen Pu Ling, Long Gang District, Shenzhen, Guangdong, China 518116

Product: LED FLOOD LIGHT
Trade Name: Minglight
Model No: PL15-60W, PL35-100W, PL35-120W, PL35-100W, PL31-80W, PL15-80W, PL35-100W, PL76-120W

Test Standard: EN60598-1:2013
EN60598-2-1:2014
EN60598-2-2:2014
EN60598-2-3:2014

The certificate of conformity is based on an evaluation of a sample of the above mentioned product. Technical report is at the applicant's disposal. This is to certify that the tested sample is in conformity with all provisions of Annex I of Council Directive 2014/30/EU. This certificate does not imply assessment of the production and does not permit the use of lab's logo.

Approved by: Andy Lin
Manager
Apr. 28, 2016

Shenzhen CCT Testing Technology Co., Ltd.
3F, Huasheng Business Building, Fuyuan Industrial Zone, Baoan District, Shenzhen, China
Tel: 86-0755-33023338 E-mail: Lian@szcct.com.cn Fax: 86-0755-27685557 Http://www.cctlab.com

certificate

Has passed performance test and quality assurance test

intertek
Total Quality Assured

AUTHORIZATION TO MARK

This authorizes the application of the Certification Mark(s) shown below to the models described in the Product(s) Covered section when made in accordance with the conditions set forth in the Certification Agreement and Listing Report. This document is the property of Intertek Testing Services and is not transferable. The certification mark(s) may be applied only at the location of the Party Authorized To Apply Mark.

Applicant: ShenZhen Minglight Co., Ltd
Room 201, Building A, Factory 3, No. 8, Cichang Road, Yuanshan Street, Baoan Community, Longgang, Shenzhen, Guangdong
Country: China
Party Authorized To Apply Mark: Same as Manufacturer
Report Issuing Office: Intertek Testing Services (Shanghai FTZ) Co., Ltd
Control Number: 5001529
Authorized by: for L. Matthew Snyder, Certification Manager

Manufacturer: ShenZhen Minglight Co., Ltd
Room 201, Building A, Factory 3, No. 8, Cichang Road, Yuanshan Street, Baoan Community, Longgang, Shenzhen, Guangdong
Country: China

This document supersedes all previous Authorizations to Mark for this notated Report Number.

Intertek
Intertek Testing Services NA Inc.
345 East Algonquin Road, Arlington Heights, IL 60005
Telephone 800-345-3861 or 847-439-5667 Fax 312-263-1672

Standard(s): Luminaires [UL 1599-2021 Ed.5]
Product: LED Flood Light
Brand Name: Minglight, JINKMGL, CINOTON

MLWPB-42W-, MLWPB-60W-, MLWPB-80W-, MLWPB-100W- or MLWPB-120W-, followed by three characters; followed by -, followed by two characters; followed by K-, followed by one character.
MLWPB-42W-, MLWPB-60W-, MLWPB-80W-, MLWPB-100W- or MLWPB-120W-, followed by three characters; followed by -, followed by two characters; followed by K-, followed by one character, followed by -G.
MLWPB2-42W-, MLWPB2-60W-, MLWPB2-80W-, MLWPB2-100W- or MLWPB2-120W-, followed by three characters; followed by -, followed by two characters; followed by K-, followed by one character.
MLWPC2-42W-, MLWPC2-60W-, MLWPC2-80W- or MLWPC2-100W-, followed by three characters;

ATM for Report 19020085H2H-001 Page 1 of 2 ATM Issued: 29-Nov-2024 ED 16.3.15 (1-1-2022) Mandatory

certificate

Has passed performance test and quality assurance test

Certificate of Conformity

Certificate No.: CCT20500304ENCER

Applicant: ShenZhen Minglight Co., Ltd
Address: No. 37, Yuanlin Road, Zhangbei Community, Longgang District, SHENZHEN Guangdong 518116

Sample Name: LED Light
Model/Item No.: Appendix

Test Standards: IEC 62321-2:2013 IEC 62321-6:2015
IEC 62321-3-1:2013 IEC 62321-7-1:2017
IEC 62321-4: 2013+A1:2017 IEC 62321-7-2:2017
IEC 62321-5: 2013 IEC 62321-8:2017

The submitted sample(s) stated as above has (have) been tested by us with the listed standards and found in conformity with the requirements stated in Directive 2011/65/EU of the European Parliament and of the Council with regard to the restriction of the use of certain hazardous substances in electrical and electronic equipment and its subsequent amendments as well as Commission Delegated Directive (EU) 2015/863.

This certification is part of the full test report(s) and should be read in conjunction with it. The certificate is based on a single evaluation of one sample of above-mentioned products. It does not imply an assessment of the whole production.

RoHS

Technical director
May 31, 2022

Compliance Control Institute (Shanghai) Co., Ltd
Room 201, Building A, Factory 3, No. 8, Cichang Road, Yuanshan Street, Baoan Community, Longgang, Shenzhen, Guangdong, China
Tel: 86-0755-33023338 Fax: 86-0755-27685557 Http://www.cctlab.com

certificate

Has passed performance test and quality assurance test

Model# MLHBK150W30KT90Y

Manufacturer: Shenzhen Minglight Co., Ltd
Brand: Minglight
Technical Requirements Version: 4.3
Date Qualified: 08/13/2016
Product ID: PP2A5EH

Category: Indoor Luminaires
General Application: High-Bay
Primary Use: High-Bay Luminaires for Commercial and Industrial Buildings

Classification: standard
Is Parent Product: Yes
DLC Family Code: XXXXX
Listing Status: Listed

Tested Data Reported Data Zonal Lumens Spacing Criteria Product Features Version History Family Data

Light Output: 18346.7 lm
Wattage: 144.69 W
Efficacy: 126.8 lm/W
Power Factor: 0.951
CCT: 5016 K
CRI: 71.5
Total Harmonic Distortion: 8.6 %

Model# MLHBX240W30KT90Y

Manufacturer: Shenzhen Minglight Co., Ltd
Brand: Minglight
Technical Requirements Version: 4.3
Date Qualified: 08/13/2016
Product ID: PPBF3J3R

Category: Indoor Luminaires
General Application: High-Bay
Primary Use: High-Bay Luminaires for Commercial and Industrial Buildings

Classification: standard
Is Parent Product: Yes
DLC Family Code: XXXXX
Listing Status: Listed

Tested Data Reported Data Zonal Lumens Spacing Criteria Product Features Version History Family Data

Light Output: 35311 lm
Wattage: 229.49 W
Efficacy: 127.4 lm/W
Power Factor: 0.929
CCT: 3843 K
CRI: 74.7
Total Harmonic Distortion: 13.4 %

certificate

Has passed performance test and quality assurance test

Model# ML-WPA-76W-36

Manufacturer: Shenzhen Minglight Co., Ltd
Brand: Minglight
Technical Requirements Version: 4.3
Date Qualified: 03/27/2017
Product ID: PM16CCGS

Category: Outdoor Luminaires
General Application: Mid Output
Primary Use: Outdoor Non-Cutoff and Semi-Cutoff Pole-Mounted Area Luminaires

Classification: standard
Is Parent Product: Yes
DLC Family Code: XXXXX
Listing Status: Listed

Tested Data Reported Data Zonal Lumens Spacing Criteria Version History Family Data

Light Output: 2400.78 lm
Wattage: 24.76 W
Efficacy: 103.74 lm/W
Power Factor: 0.933
CCT: 2668 K
CRI: 81.5
Total Harmonic Distortion: 10.4 %

Model# ML-WPB-60W(3000K)

Manufacturer: Shenzhen Minglight Co., Ltd
Brand: Minglight
Technical Requirements Version: 4.3
Date Qualified: 12/01/2016
Product ID: PRZ1WNE

Category: Outdoor Luminaires
General Application: Mid Output
Primary Use: Outdoor Non-Cutoff and Semi-Cutoff Pole-Mounted Area Luminaires

Classification: standard
Is Parent Product: Yes
DLC Family Code: XXXXX
Listing Status: Listed

Tested Data Reported Data Zonal Lumens Spacing Criteria Version History Family Data

Light Output: 7104.53 lm
Wattage: 58.11 W
Efficacy: 122.25 lm/W
Power Factor: 0.923
CCT: 3040 K
CRI: 76.2
Total Harmonic Distortion: 15.1 %

certificate

Has passed performance test and quality assurance test



PAGE 11
**Mini LED Wallpack
Light**
WPA-12-13W



PAGE 18-20
**Rotable Full cut off
Wall Pack**
WPD2-20-120W



PAGE 25-28
**Parking Lot &
Street Light**
PLC-50-450W



PAGE 35-36
**Flood
Light**
FL-50-300W



PAGE 12-14
**Mini LED Wallpack
Light**
WPA-18-26W



PAGE 21-22
**Semi-cut off
Wall Pack Light**
WPB-42-120W



PAGE 29-30
**LED Street
Light**
STL-50-200W



PAGE 37-38
**Flood
Light**
FLG-50-500W



PAGE 15-16
**Mini LED Wallpack
Light**
WPA-D-30W



PAGE 23
**LED Wall Pack
Light**
WPB4-30-120W



PAGE 31-32
**Flood
Light**
FL-15-100W



PAGE 39-40
**Parking Lot
Light**
PLD-150-300W



PAGE 17
**Full CUT OFF Wall
Pack**
WPC2-42-100W



PAGE 24
**Full cut off wall
pack**
WPC3-40-120W



PAGE 33-34
**Flood
Light**
FL-150-200W



PAGE 41-42
**Flood
Light**
FLD-55W



PAGE 43-44

**LED Highbay
Light**

HBC-100-300W



PAGE 50

**Circular LED Canopy
Light**

CNPE-40-100W



PAGE 59

**LED Highbay
Stadium Light**

HBS-300-1200W



PAGE 45-46

**LED Highbay
Light (HBC-3)**

HBC3-100-200W



PAGE 51-52

**Square LED
Canopy Light**

CNPF-55W



PAGE 60

**LED Stadium
Light**

SPL-250-1800W



PAGE 47-48

**Square LED
Canopy Light**

CNPC-80-100W



PAGE 53-54

Barn Light

YDA-42W



PAGE 61

LED Bollard

DLW-LED-064-
LOUVER-10-30W



PAGE 49

**Square LED Canopy
Light**

CNPD-80-100W



PAGE 55-58

**Super Bright LED
Linear High Bay Light**

LHB01-100-400W



PAGE 62

LED Bollard

DLW-LED-029-
LOUVER-10-20W

MINI LED WALLPACK LIGHT / WPA-13W



Key Features:


- High performance LED fixture 130lm/W
- Unique design of heat sink, energy-saving
- Stable and durable, easy installment and maintenance
- Photocell is available
- DLC ETL FCC IC+philips LED+5 years warranty



I SPECIFICATION

Model No	Power	Voltage	CCT	IP Rated	CRI	Lumens
ML - WPA-12W	12W	120-277VAC	3000K,4000K,5000K,5700K	IP65	Ra>70	130lm/w
ML - WPA-13W	13W		3000K,4000K,5000K,5700K	IP65	Ra>70	130lm/w

I DIMENSIONS

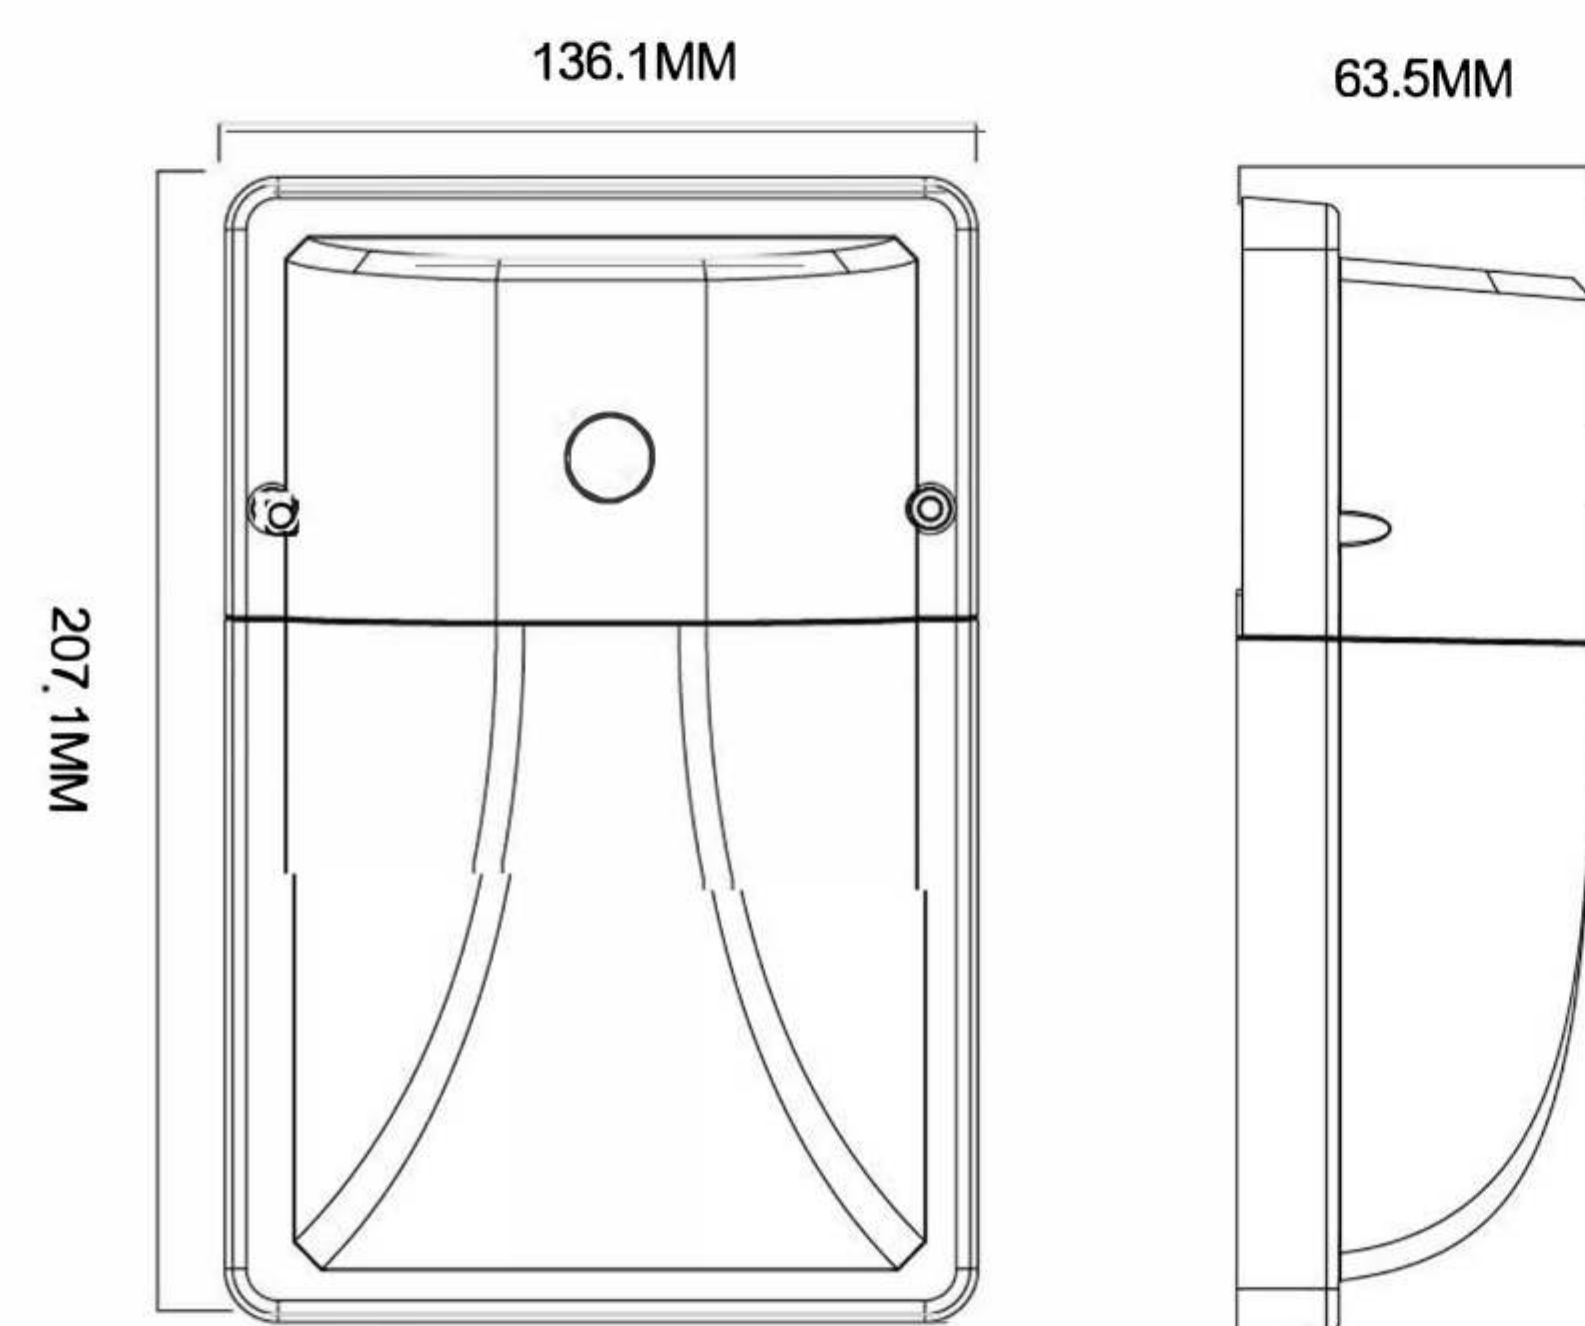

12W & 13W

I ADDITIONAL ACCESSORY



MINI LED WALLPACK LIGHT



Key Features:


- Mini Compact Heat Sink for Cooling
- Photocell available
- Precision Optics for Average Lighting Effect
- Lumen Efficacy 130LM/W
- DLC Premium 5.1
- IP65 Wet Location



I SPECIFICATION

Model No	Power	Voltage	CCT	CRI	Lumens
WPA-18W	18W	120-277VAC	3000K,4000K,5000K,5700K	Ra > 70	130LM/W
WPA-26W	26W		3000K,4000K,5000K,5700K	Ra > 70	130LM/W
WPA-26W (Power & CCT Selectable)	26W-18W-13W		3000K,4000K,5000K	Ra > 70	130LM/W

I DIMENSIONS

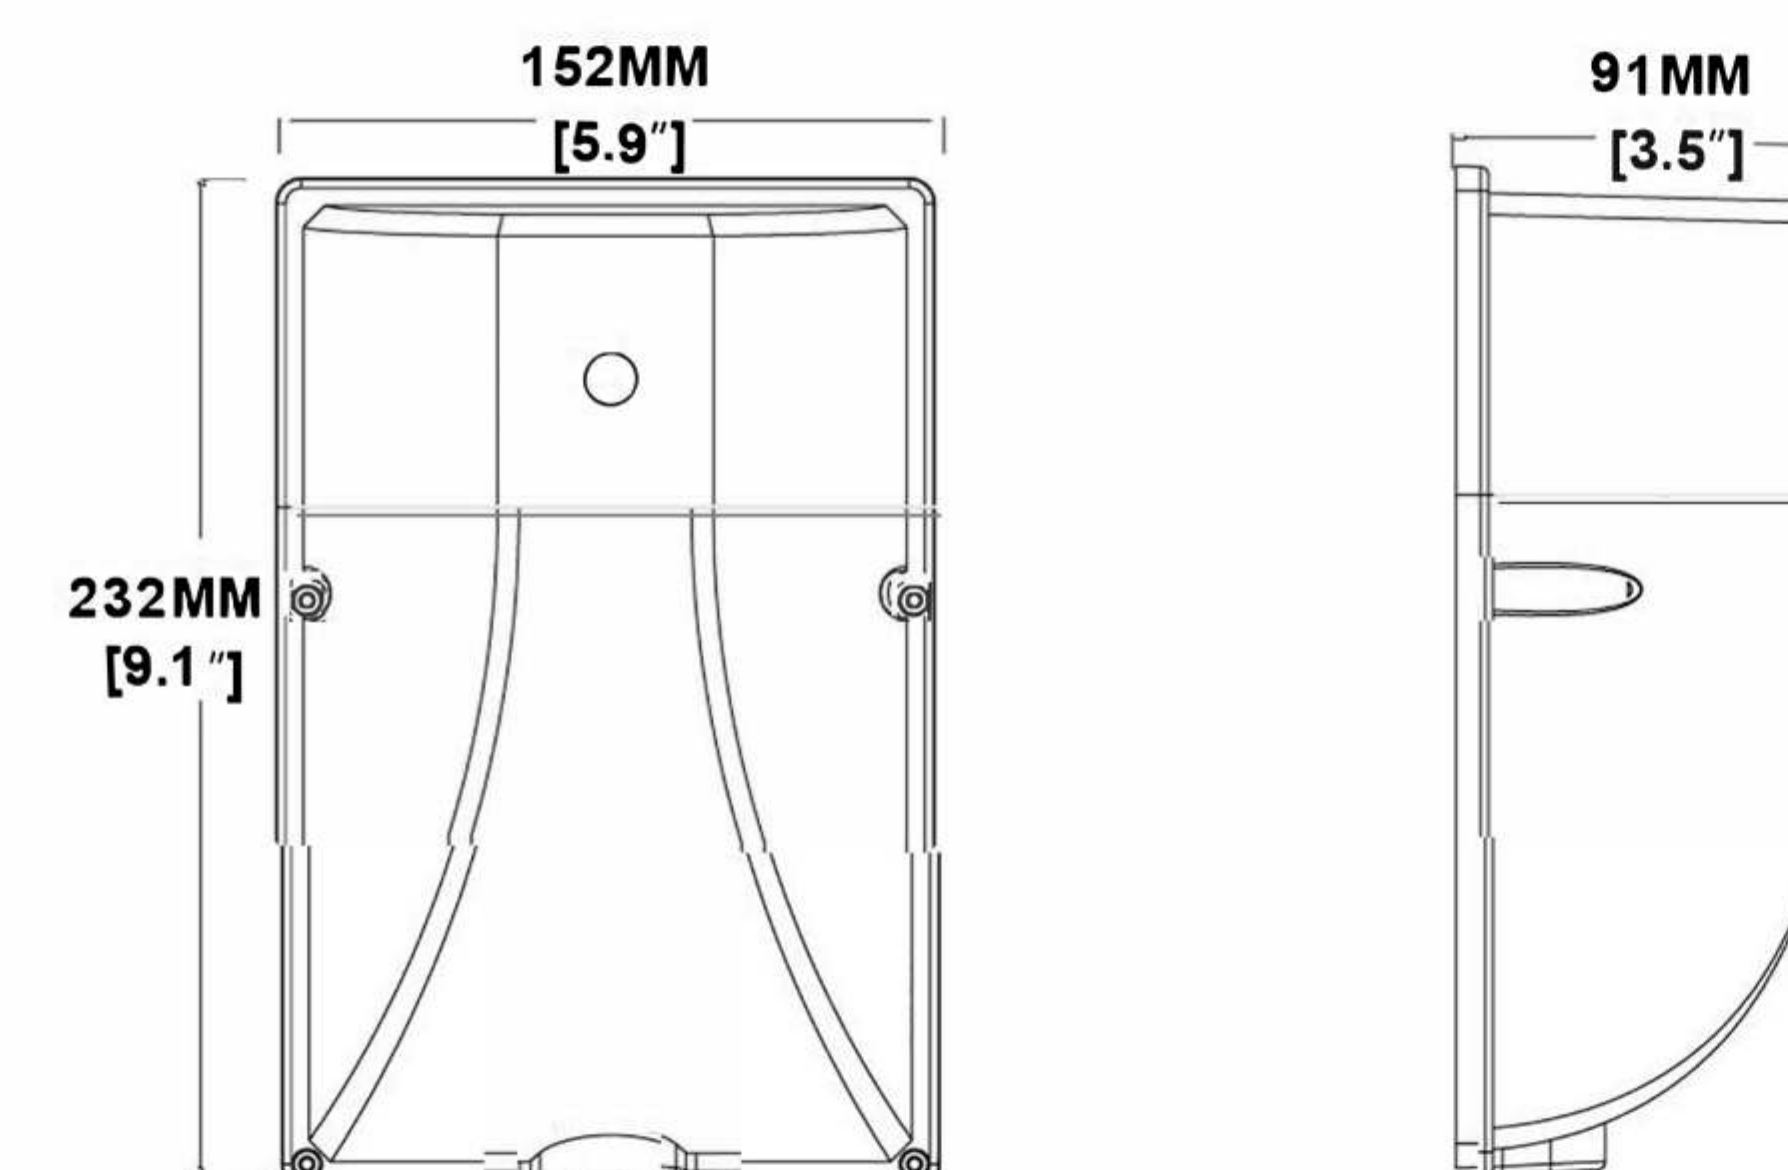

18W&26W


I ADDITIONAL ACCESSORY



Photocell

Shorting Cap

I FUNCTION OPTIONS

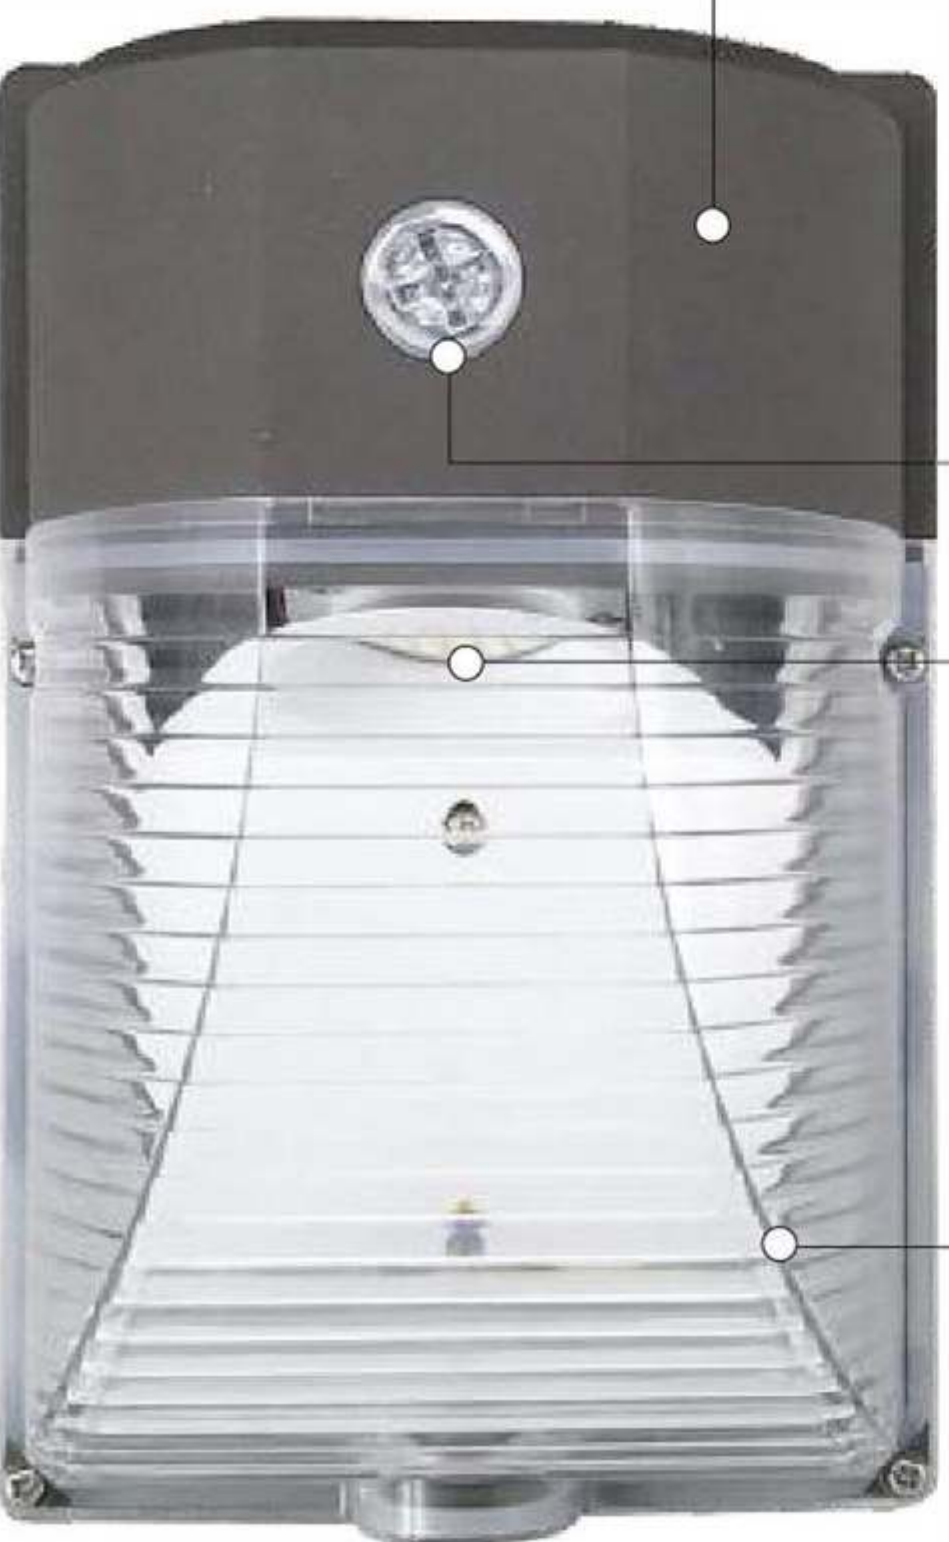

Die-Casting Aluminum
Good heat dissipation for long lifespan

Including Photocell
photocell in 100-277Vac photocell removable

LM80 LEDs
Up to 120lm/w L70>10,000hours

UV resistance Cover
no discoloration

I 3POWER AND 3 CCT FOR CHOICE





3-CCT Selectable 3-Wattage Selectable

I USAGE SCENARIO



MINI LED WALLPACK LIGHT /WPA-D 30W



Key Features:


- Two wire connecting
- DLC ETL Listed
- 130lm/w beam light
- 3CCT&3Power switchable
- Mordern stylish Mini wallpack



I SPECIFICATION

Model No	Power	Voltage	CCT	IP Rated	CRI	Lumens
WPA-D-30W	30W	120VAC	3000K,4000K,5000K,5700K	IP 65	RA>70	110LM/W

I DIMENSIONS

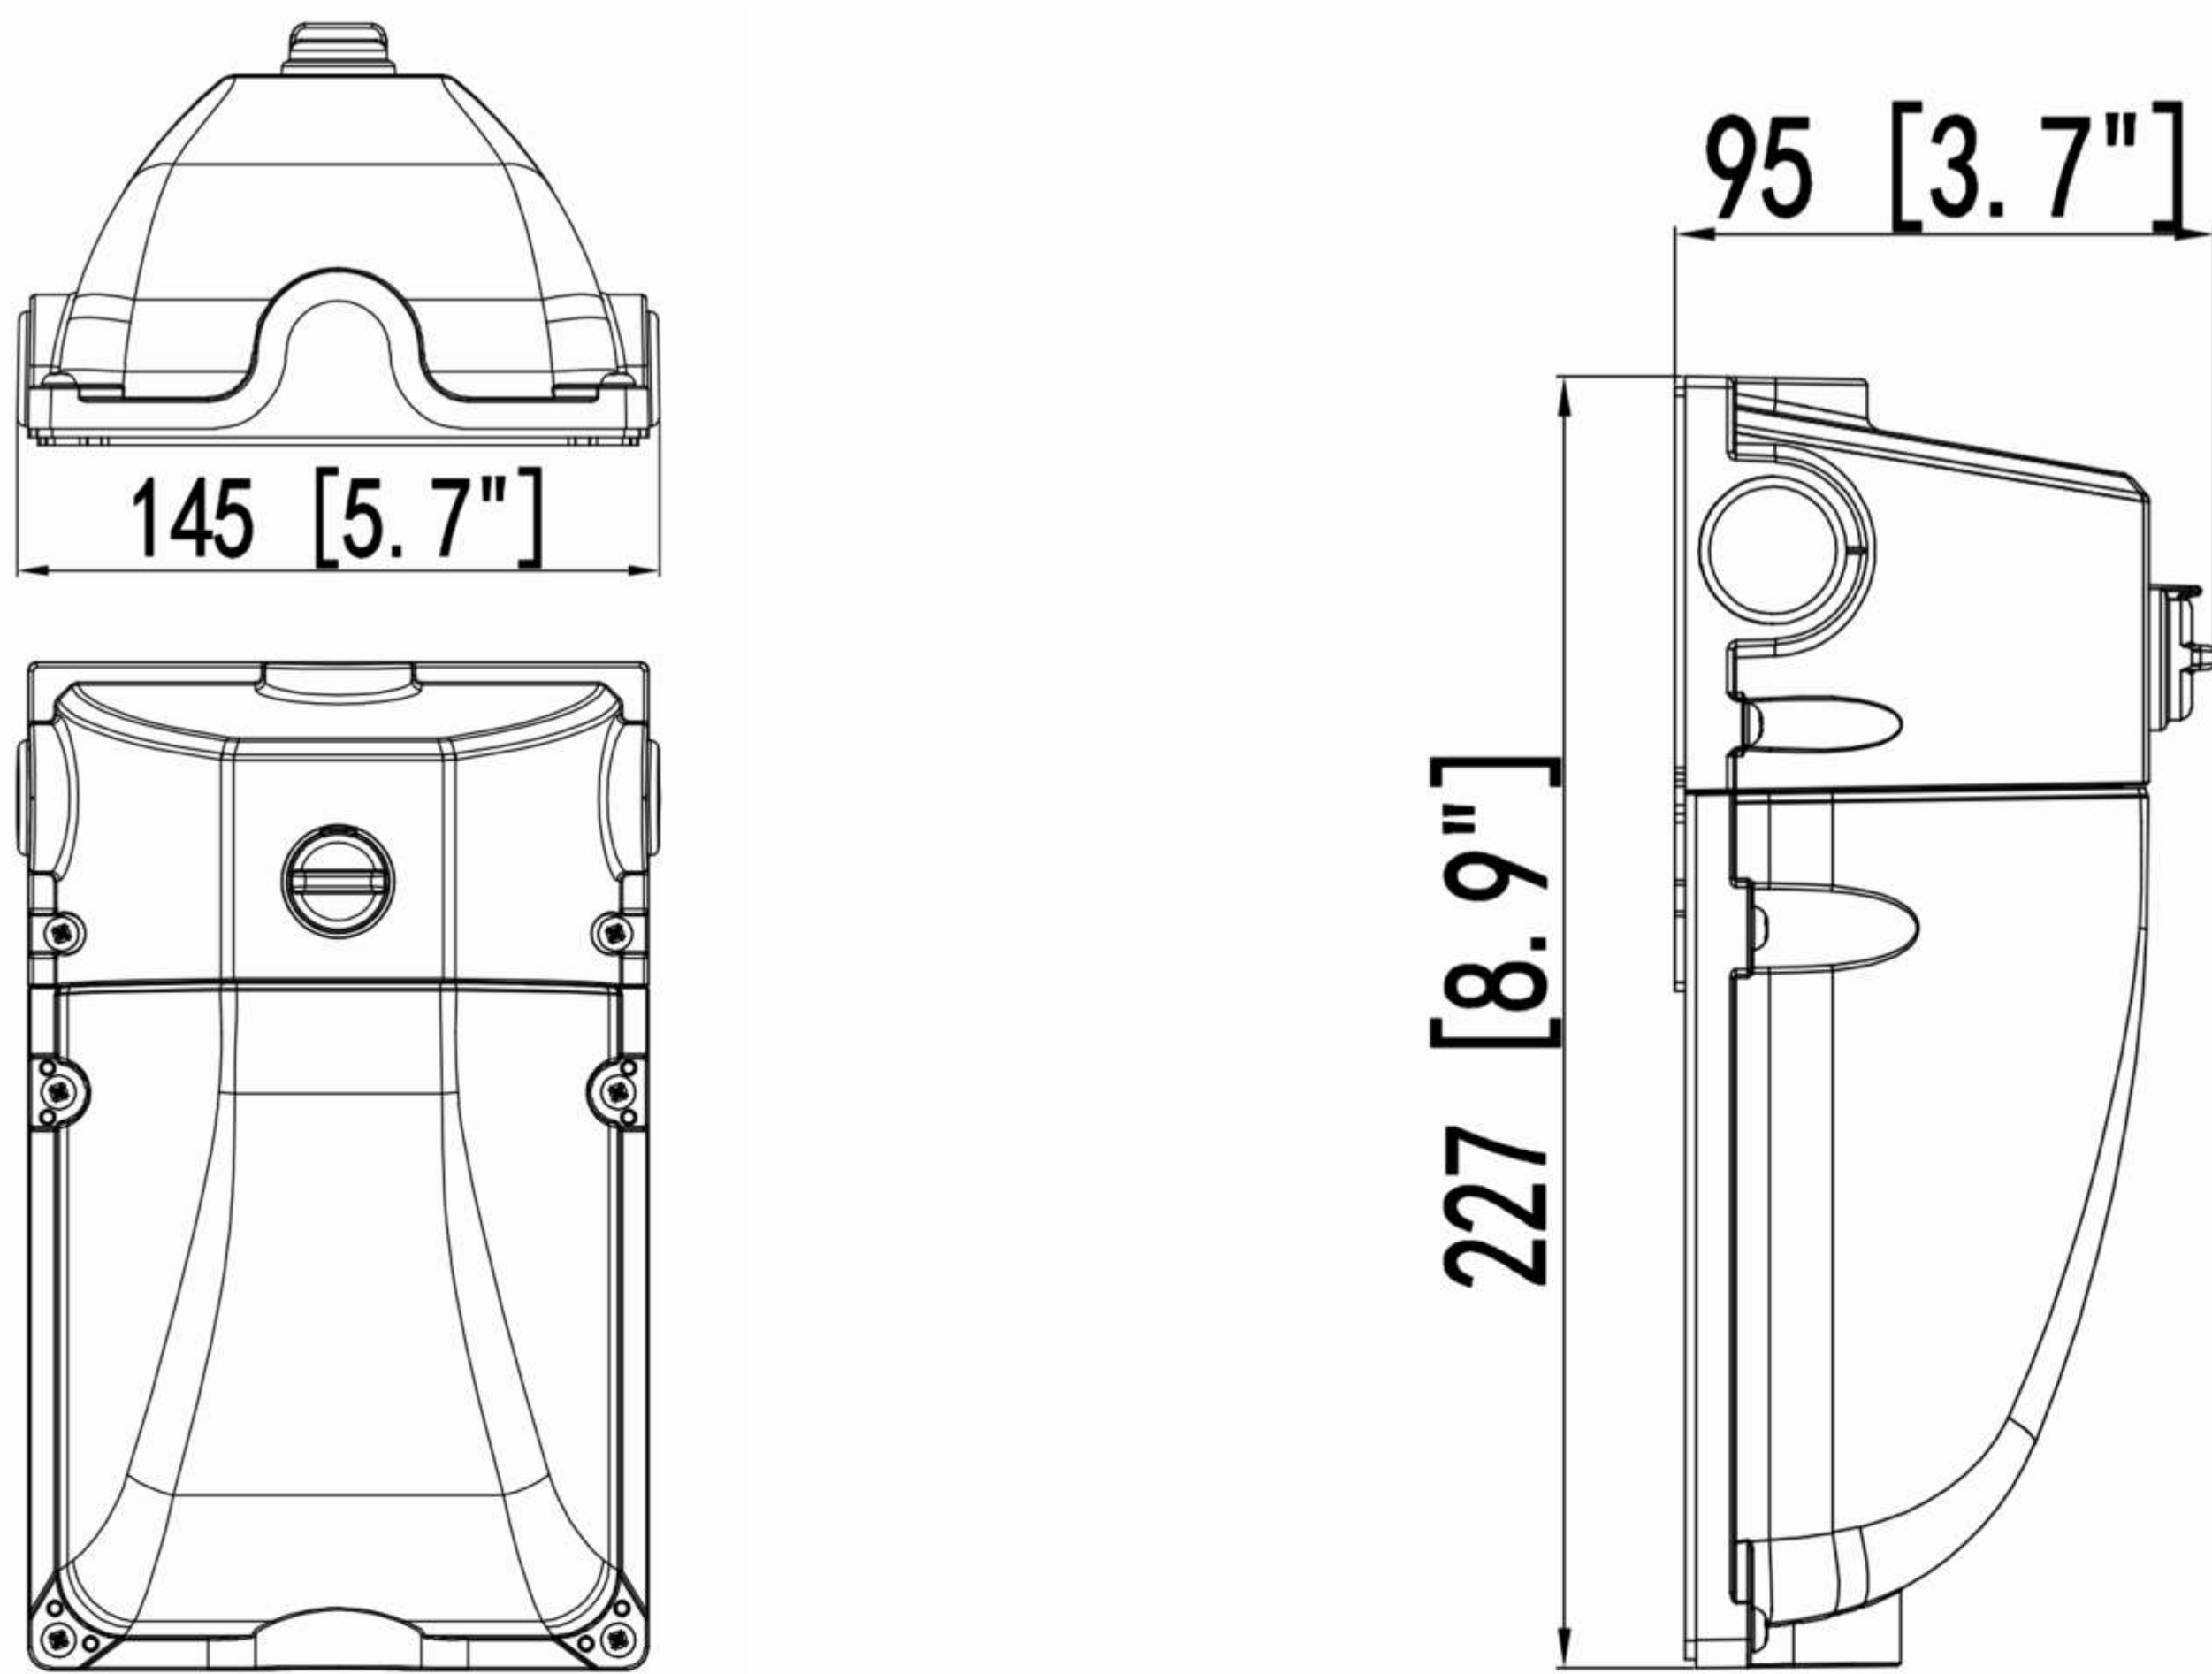

I FUNCTION OPTIONS



I USAGE SCENARIO



FULL CUT OFF WALL PACK

Key Features:




- High Performance LED Fixture 130lm/w
- Heavy-duty Cast Aluminum Housing
- Surface Mounting with Junction Box
- FIXTURE DIMENSION
- DLC ETL+Philips LED+5 Years Warranty




I SPECIFICATION

Model No	Power	Voltage	CCT	IP Rated	CRI	Lumens
ML - WPC2-42W	42W	120-277VAG / 120-347VAC	3000K,4000K,5000K,5700K	IP65	Ra>70	130lm/w
ML - WPC2-60W	60W		3000K,4000K,5000K,5700K	IP65	Ra>70	130lm/w
ML - WPC2-80W	80W		3000K,4000K,5000K,5700K	IP65	Ra>70	130lm/w
ML - WPC2-100W	100W		3000K,4000K,5000K,5700K	IP65	Ra>70	130lm/w

I DIMENSIONS

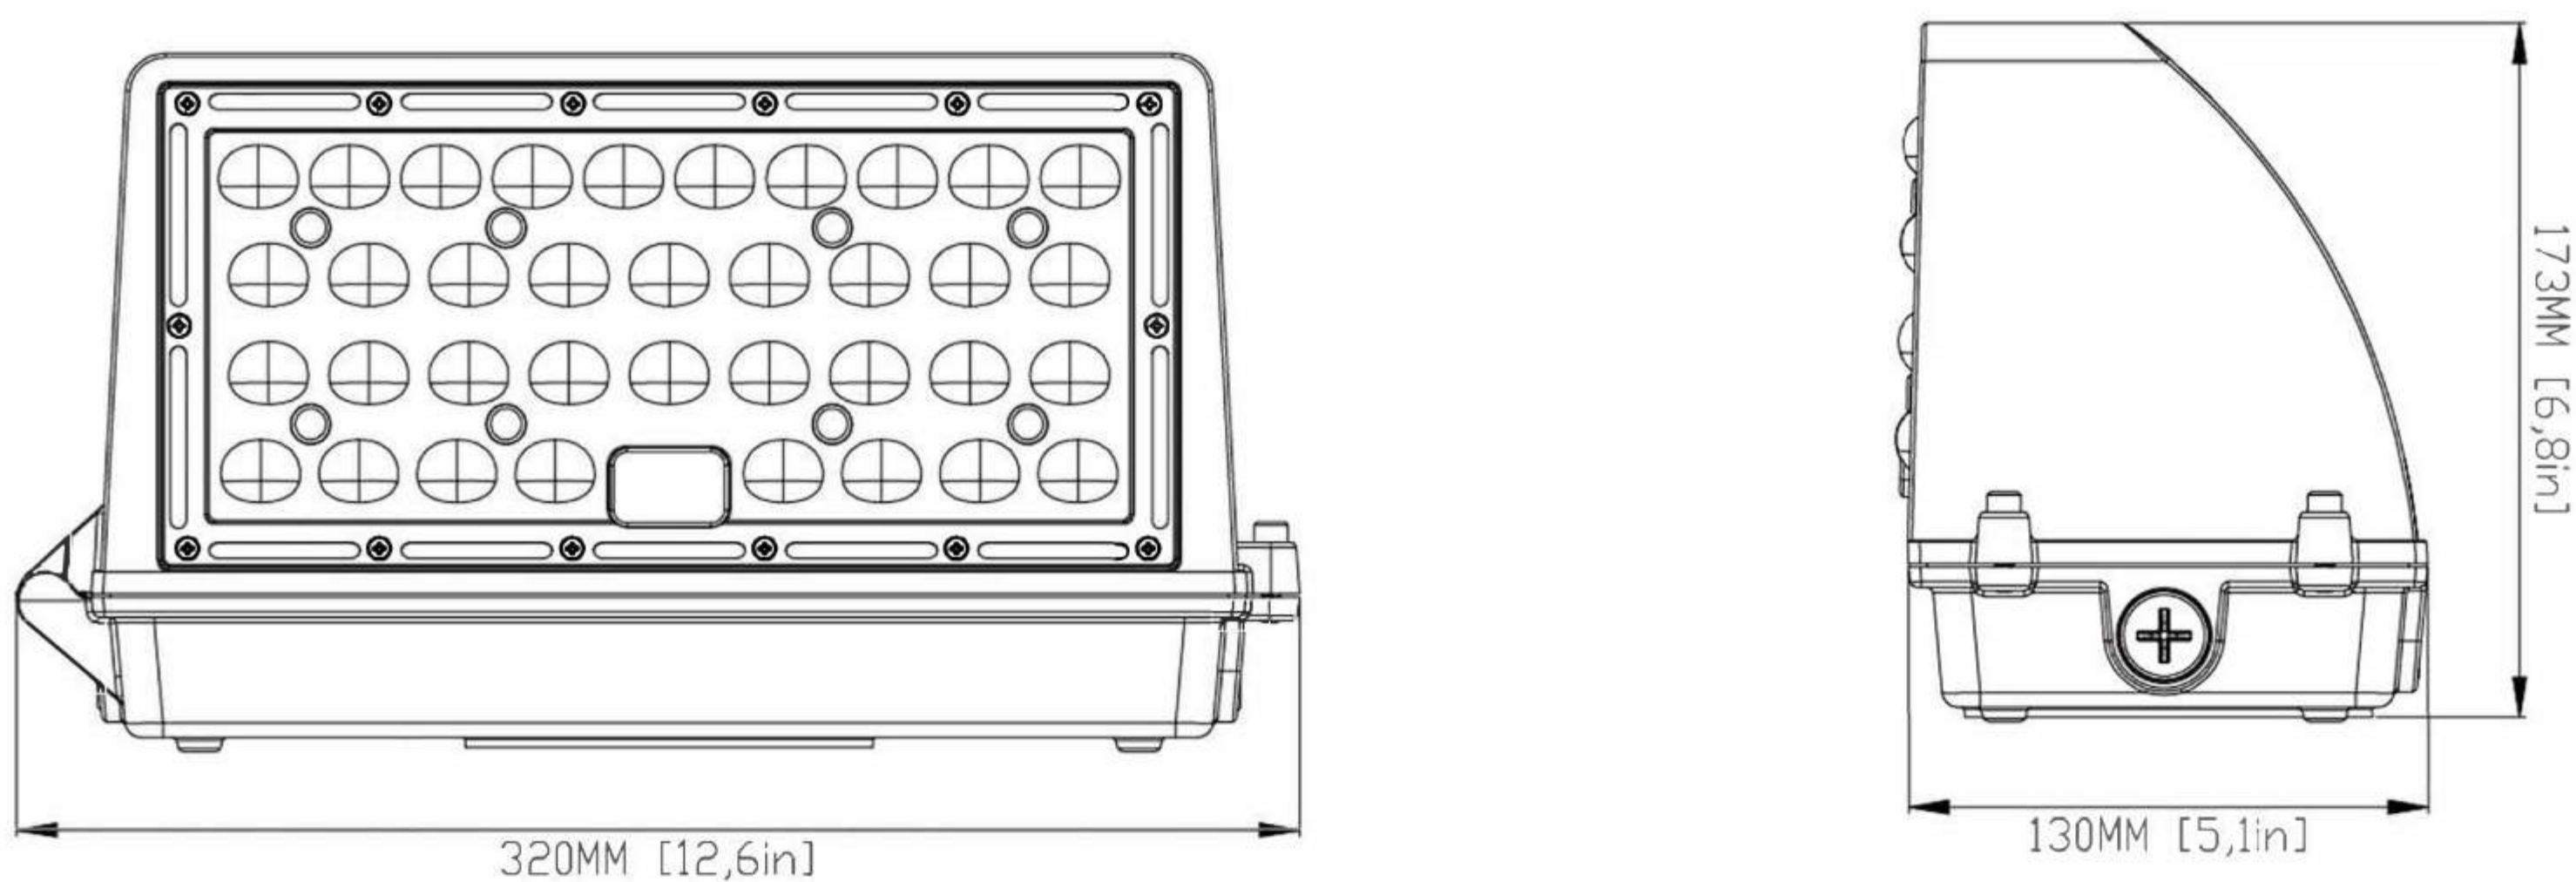

I LIGHTING DISTRIBUTION CURVE

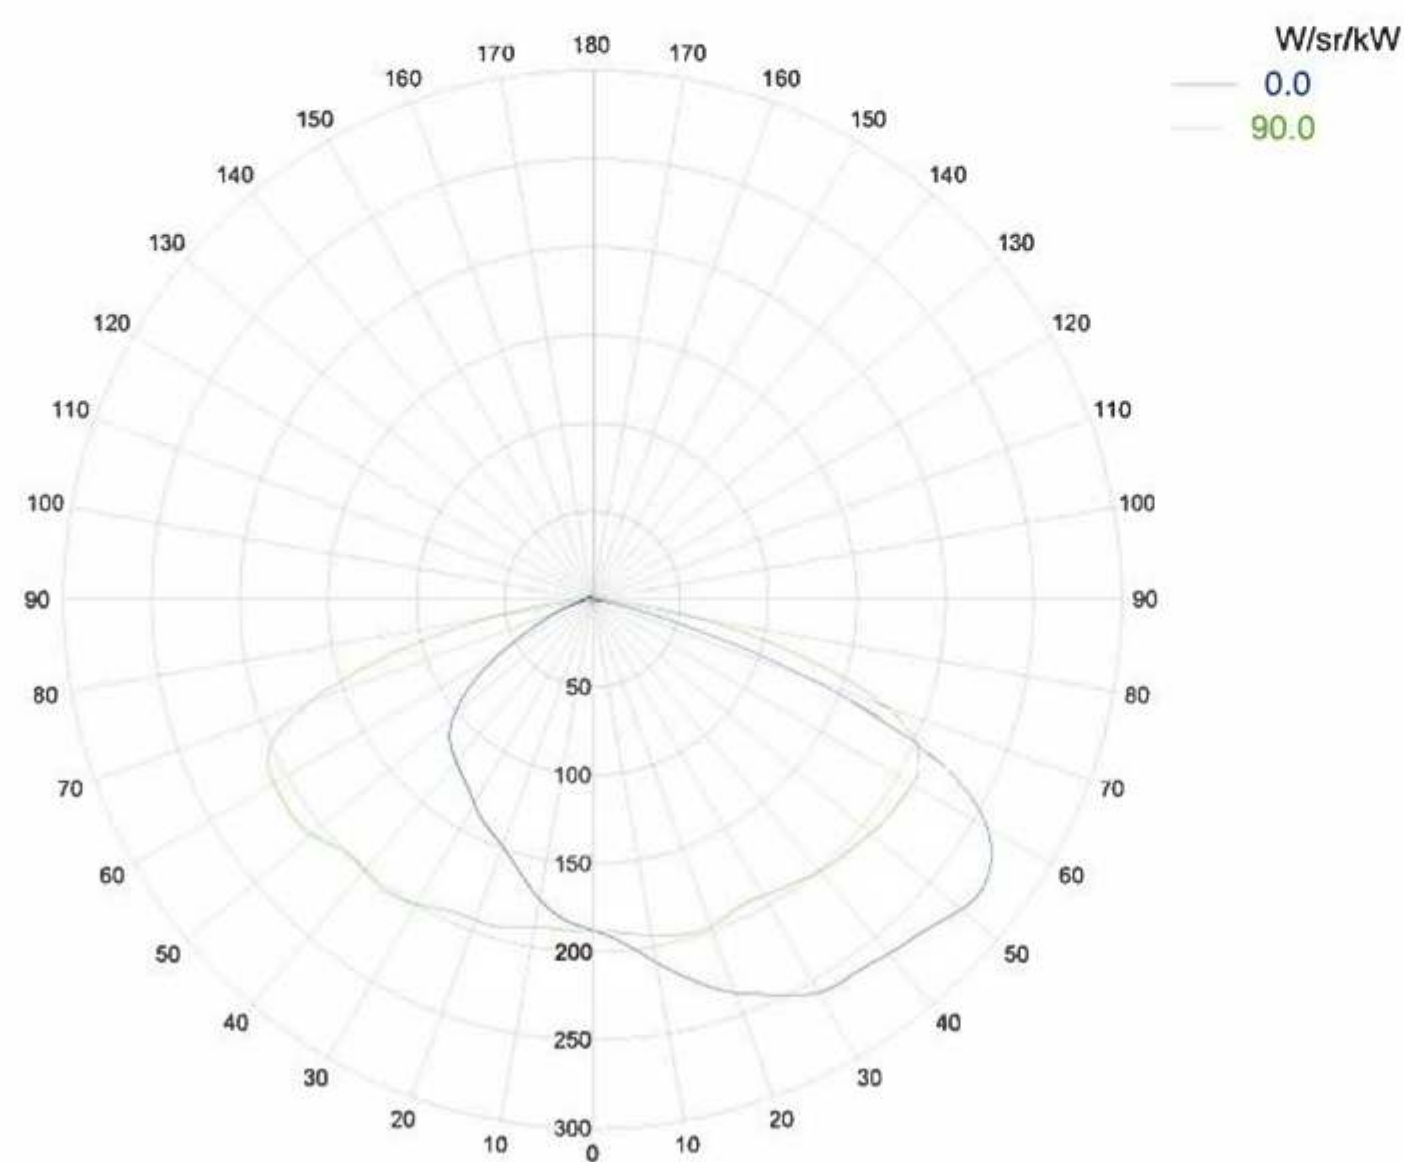

ROTABLE FULL CUT OFF WALL PACK

Key Features:




- High Performance LED Fixture 130lm/w
- 0-90 ° or 0-180 Mounting Angle optional
- Photocell is available
- Heavy-duty Cast Aluminum Housing
- DLC ETL+Philips LED+5 Years Warranty



I SPECIFICATION


Model No	Power	Voltage	CCT	IP Rated	CRI	Lumens
ML - WPD2-20W	20W	120-277VAG / 120-347VAC	3000K,4000K,5000K,5700K	IP65	Ra>70	130lm/w
ML - WPD2-40W	40W		3000K,4000K,5000K,5700K	IP65	Ra>70	130lm/w
ML - WPD2-60W	60W		3000K,4000K,5000K,5700K	IP65	Ra>70	130lm/w
ML - WPD2-80W	80W		3000K,4000K,5000K,5700K	IP65	Ra>70	130lm/w
ML - WPD2-100W	100W		3000K,4000K,5000K,5700K	IP65	Ra>70	130lm/w
ML - WPD2-120W	120W		3000K,4000K,5000K,5700K	IP65	Ra>70	130lm/w

I DIMENSIONS

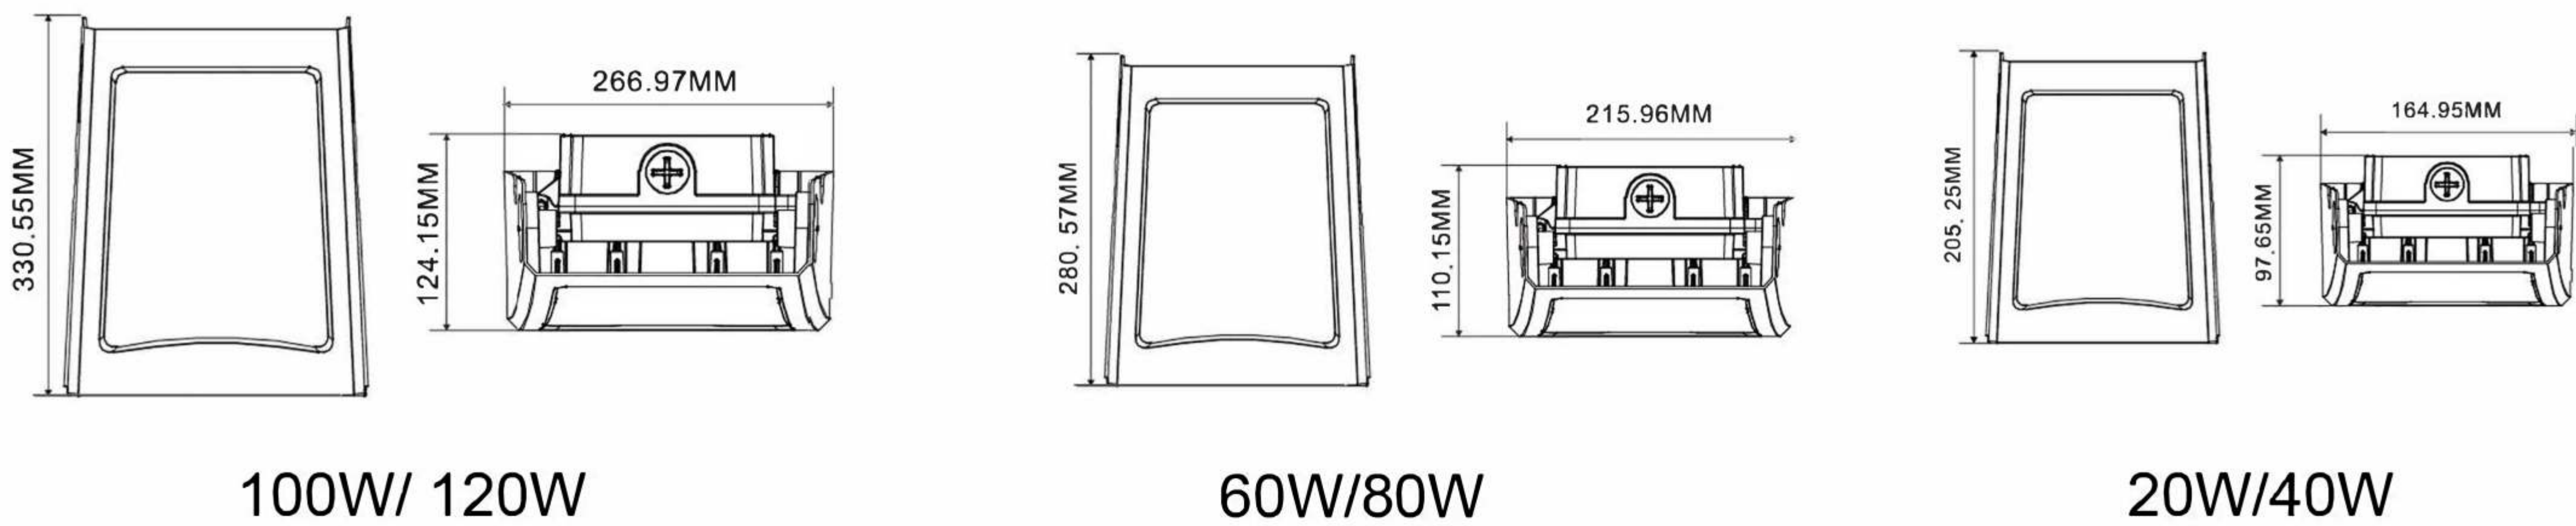


I LIGHTING DISTRIBUTION CURVE

Distribution Curve

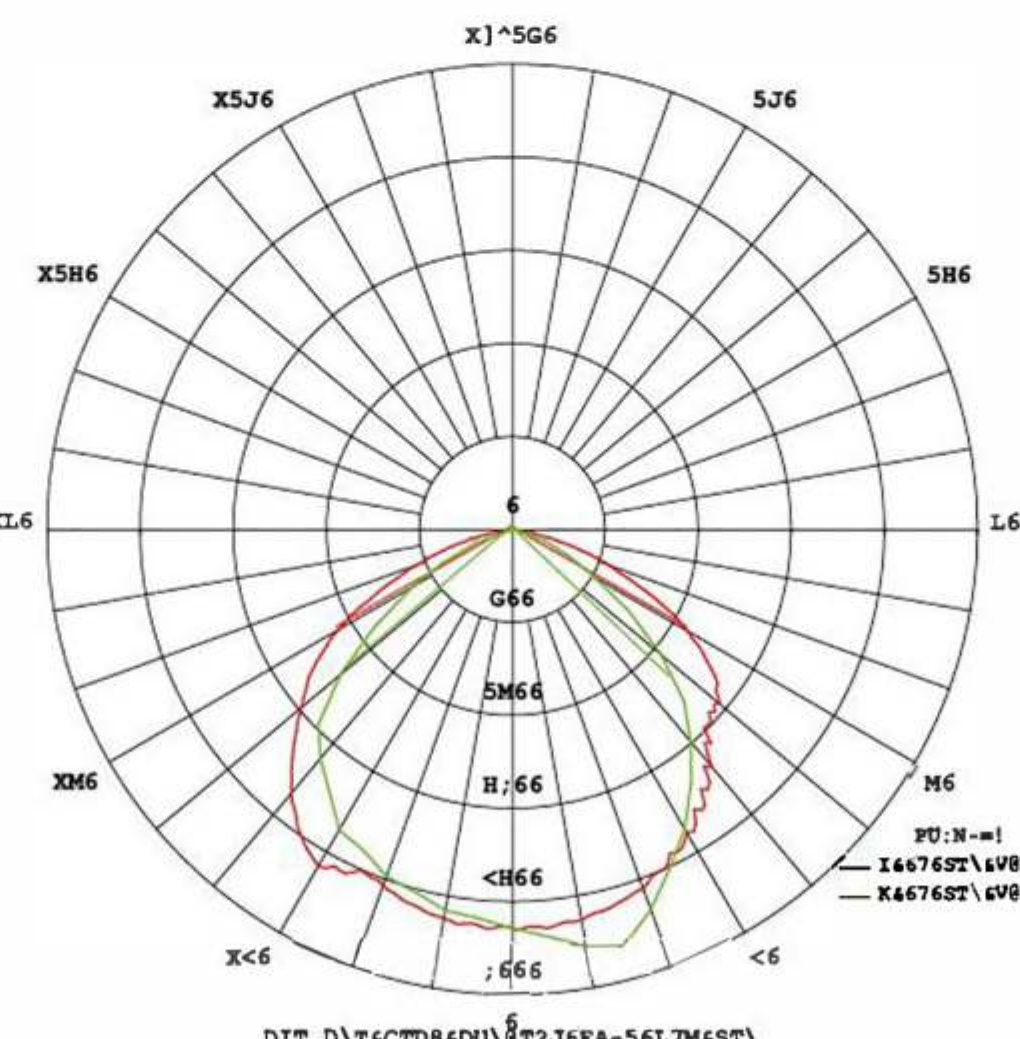

I ROTATION

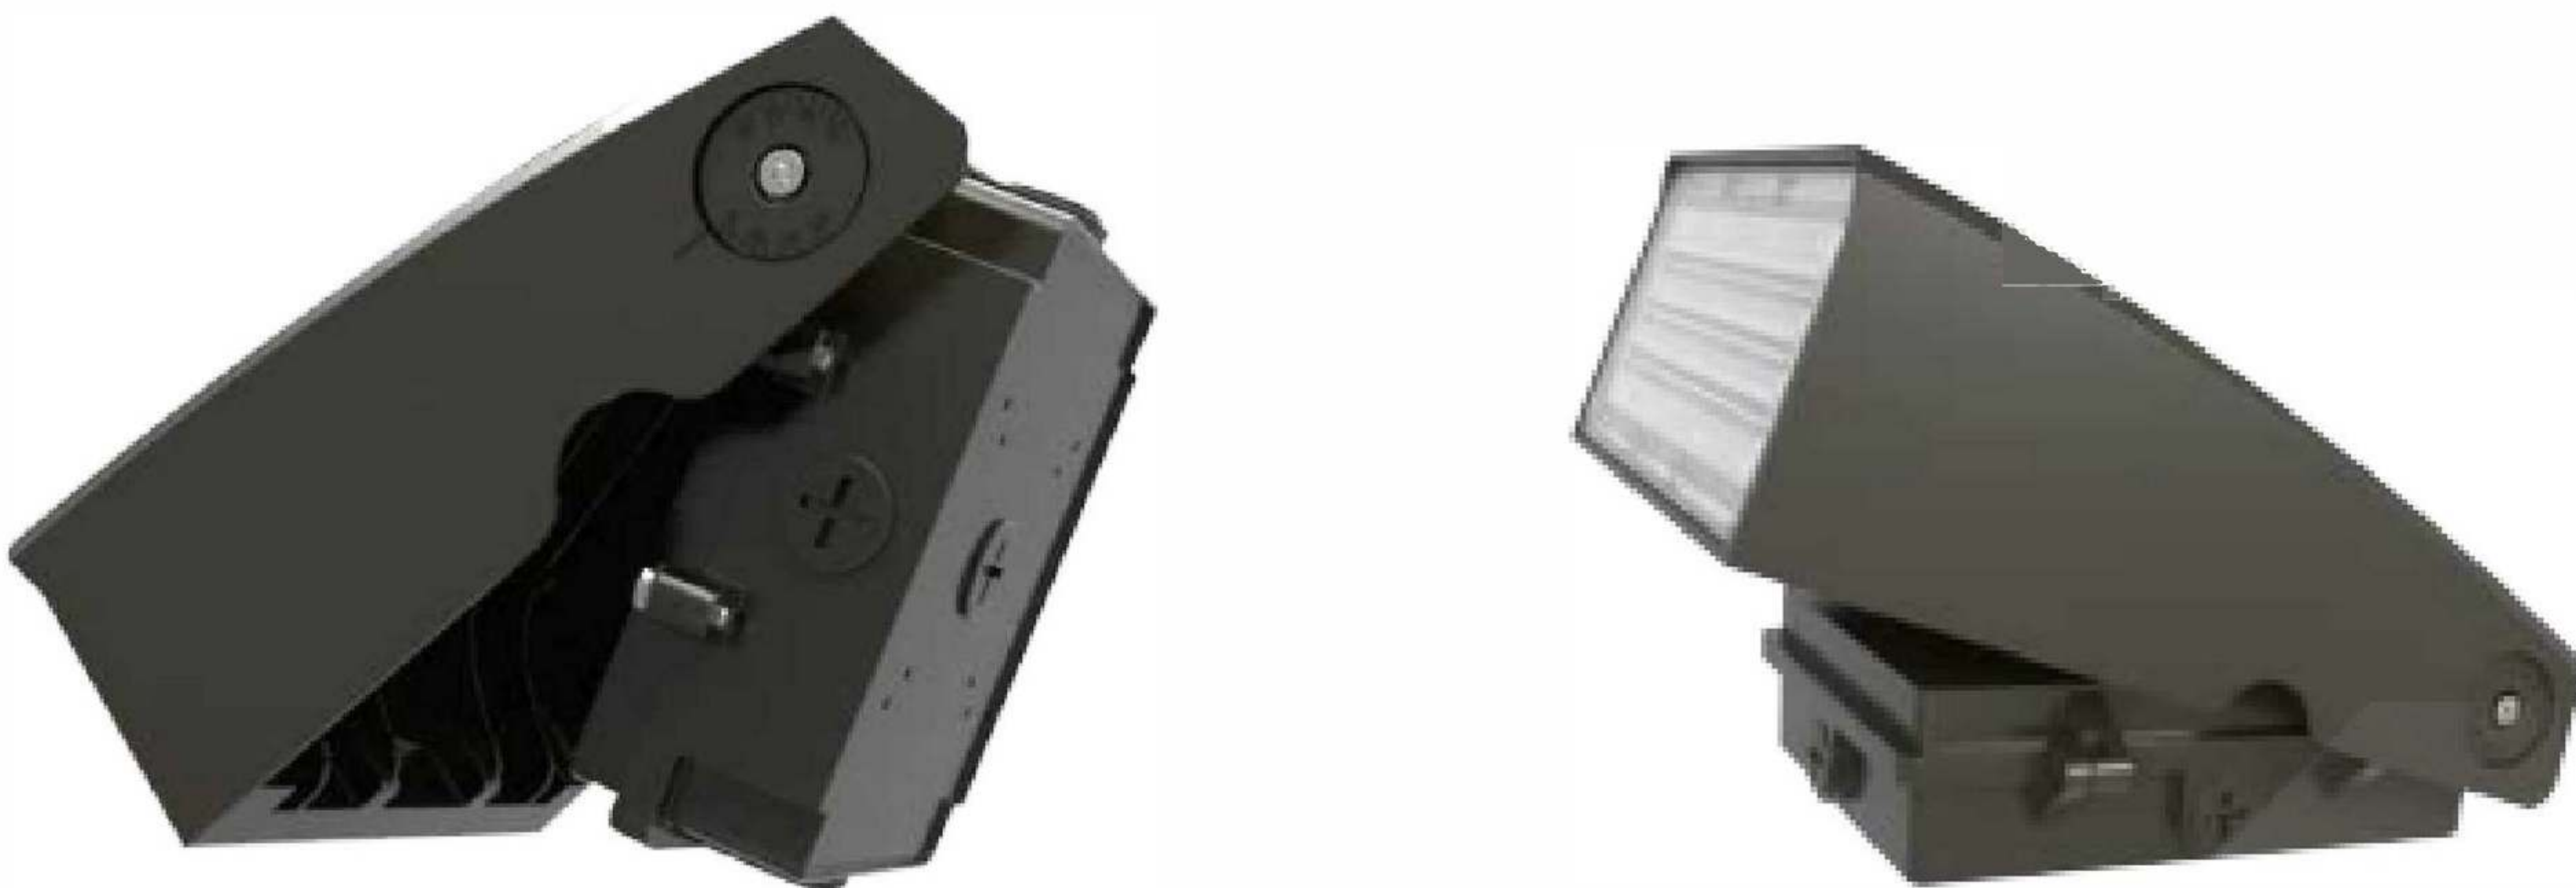

0-90°

I THE CHARACTERISTICS OF



GLARE-FREE LENS
HIGH EFFICIENCY FRESNEL LENS
LUMINOUS EFFICACY UP TO 120M/W
GLARE-FREE TO PROTECT PEOPLE EYES
UV-RESISTANT, NO YELLOWISH WORRY



DIE-CASTING ALUMINUM
GOOD HEAT DISSIPATION FOR
LONG LIFESPAN



LM80 LEDS WITH GLASS LENS .
HIGH LUMENS 120M/W
L70>80,000 HOURS
TEMPERED GLASS LENS
NO DISCOLORATION



ADJUSTABLE 0-90°
"FULL CUT-OFF" OR "HALF CUT-OFF" FOR YOUR OPTION
THERE ARE ADJUSTMENT SCALE AT THE SIZE
OF LAMP BODY FOR YOUR EASY ADJUST



I USAGE SCENARIO



BIG CLOUDY



ON A HOT DAY



THE HEAVY RAIN DAY



HEAVY SNOW DAY



SEMI-CUT OFF LED WALL PACK LIGHT

Key Features:




- Unique Die Cast Aluminum Heat Sink
- CCT & Wattage Selectable for Easy Inventory Reserve
- High Efficiency Polycarbonate Reflection
- Lumen Efficacy 130LM/W
- DLC Premium 5.1
- IP65 Wet Location
- Photocell Available



SPECIFICATION

Model No	Power	Voltage	CCT	CRI	Lumens
WPB-42W	42W	100-277V/347V	3000K,4000K,5000K,5700K	Ra>70	130lm/w
WPB-60W	60W	100-277V/347V	3000K,4000K,5000K,5700K	Ra>70	130lm/w
WPB-80W	80W	100-277V/347V	3000K,4000K,5000K,5700K	Ra>70	130lm/w
WPB-100W	100W	100-277V/347V	3000K,4000K,5000K,5700K	Ra>70	130lm/w
WPB-120W	120W	100-277V/347V	3000K,4000K,5000K,5700K	Ra>70	130lm/w
WPB-150W	150W	100-277V/347V	3000K,4000K,5000K,5700K	Ra>70	130lm/w
WPB-60W-G (3 Power & 3 CCT Selectable)	60W-50W-42W	100-277V/347V	3000K,4000K,5000K	Ra>70	130lm/w
WPB-60W-G (3 Power & 3 CCT Selectable)	100W-80W-60W	100-277V/347V	3000K,4000K,5000K	Ra>70	130lm/w
WPB-60W-G (3 Power & 3 CCT Selectable)	120W-100W-60W	100-277V/347V	3000K,4000K,5000K	Ra>70	130lm/w

DIMENSIONS

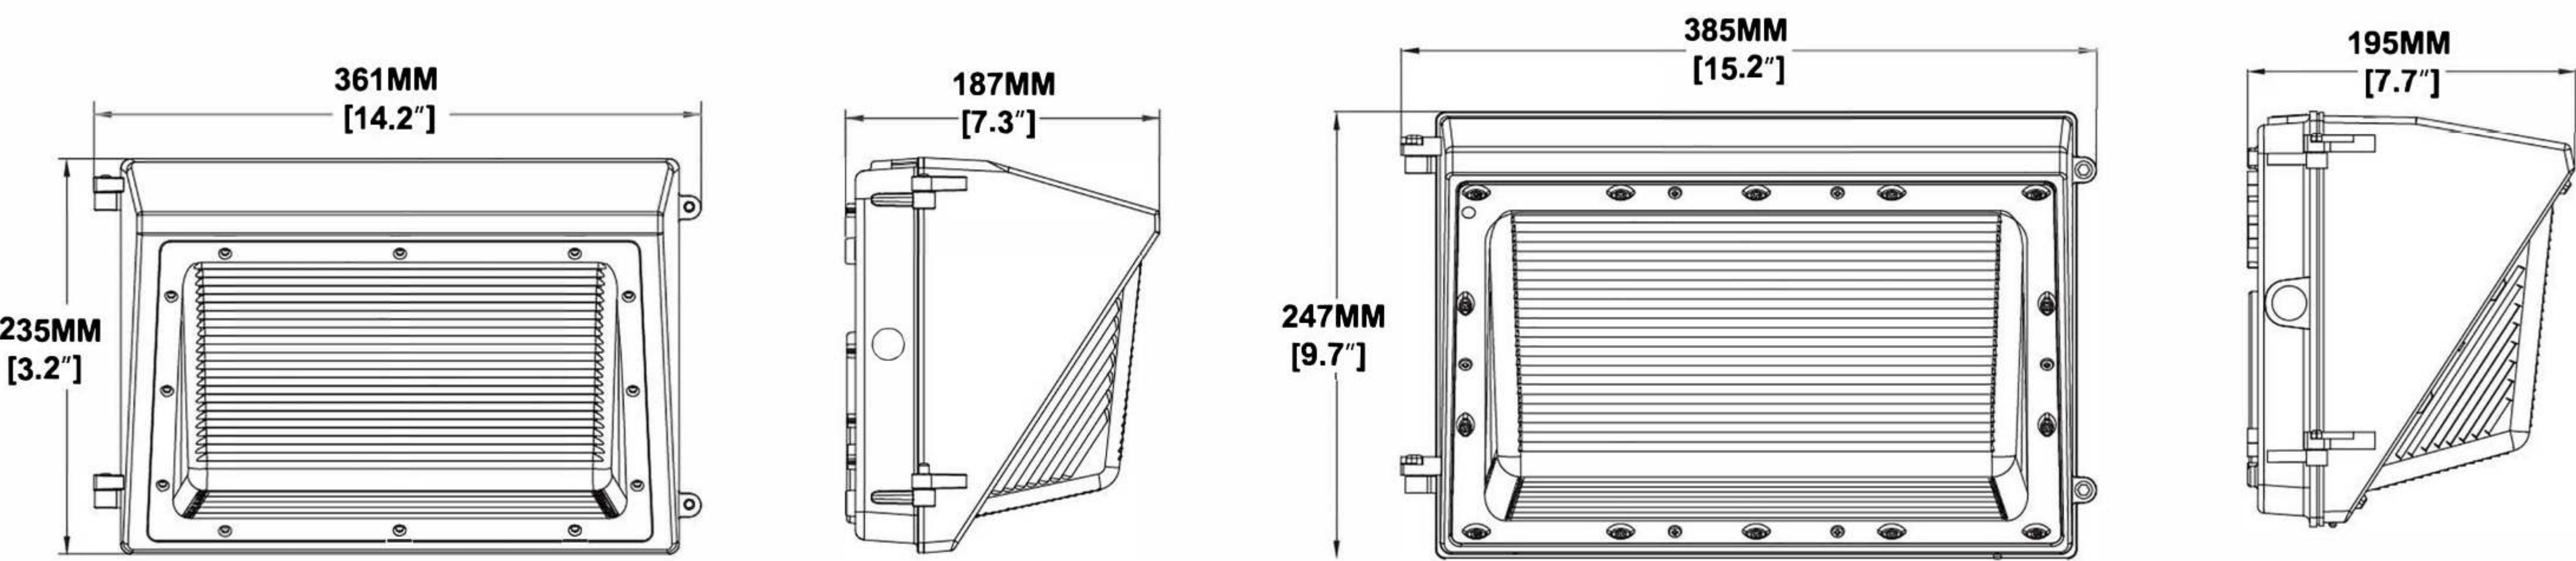

42W-120W

150W

ADDITIONAL ACCESSORY




Photocell




Shorting Cap

WARM REMINDER

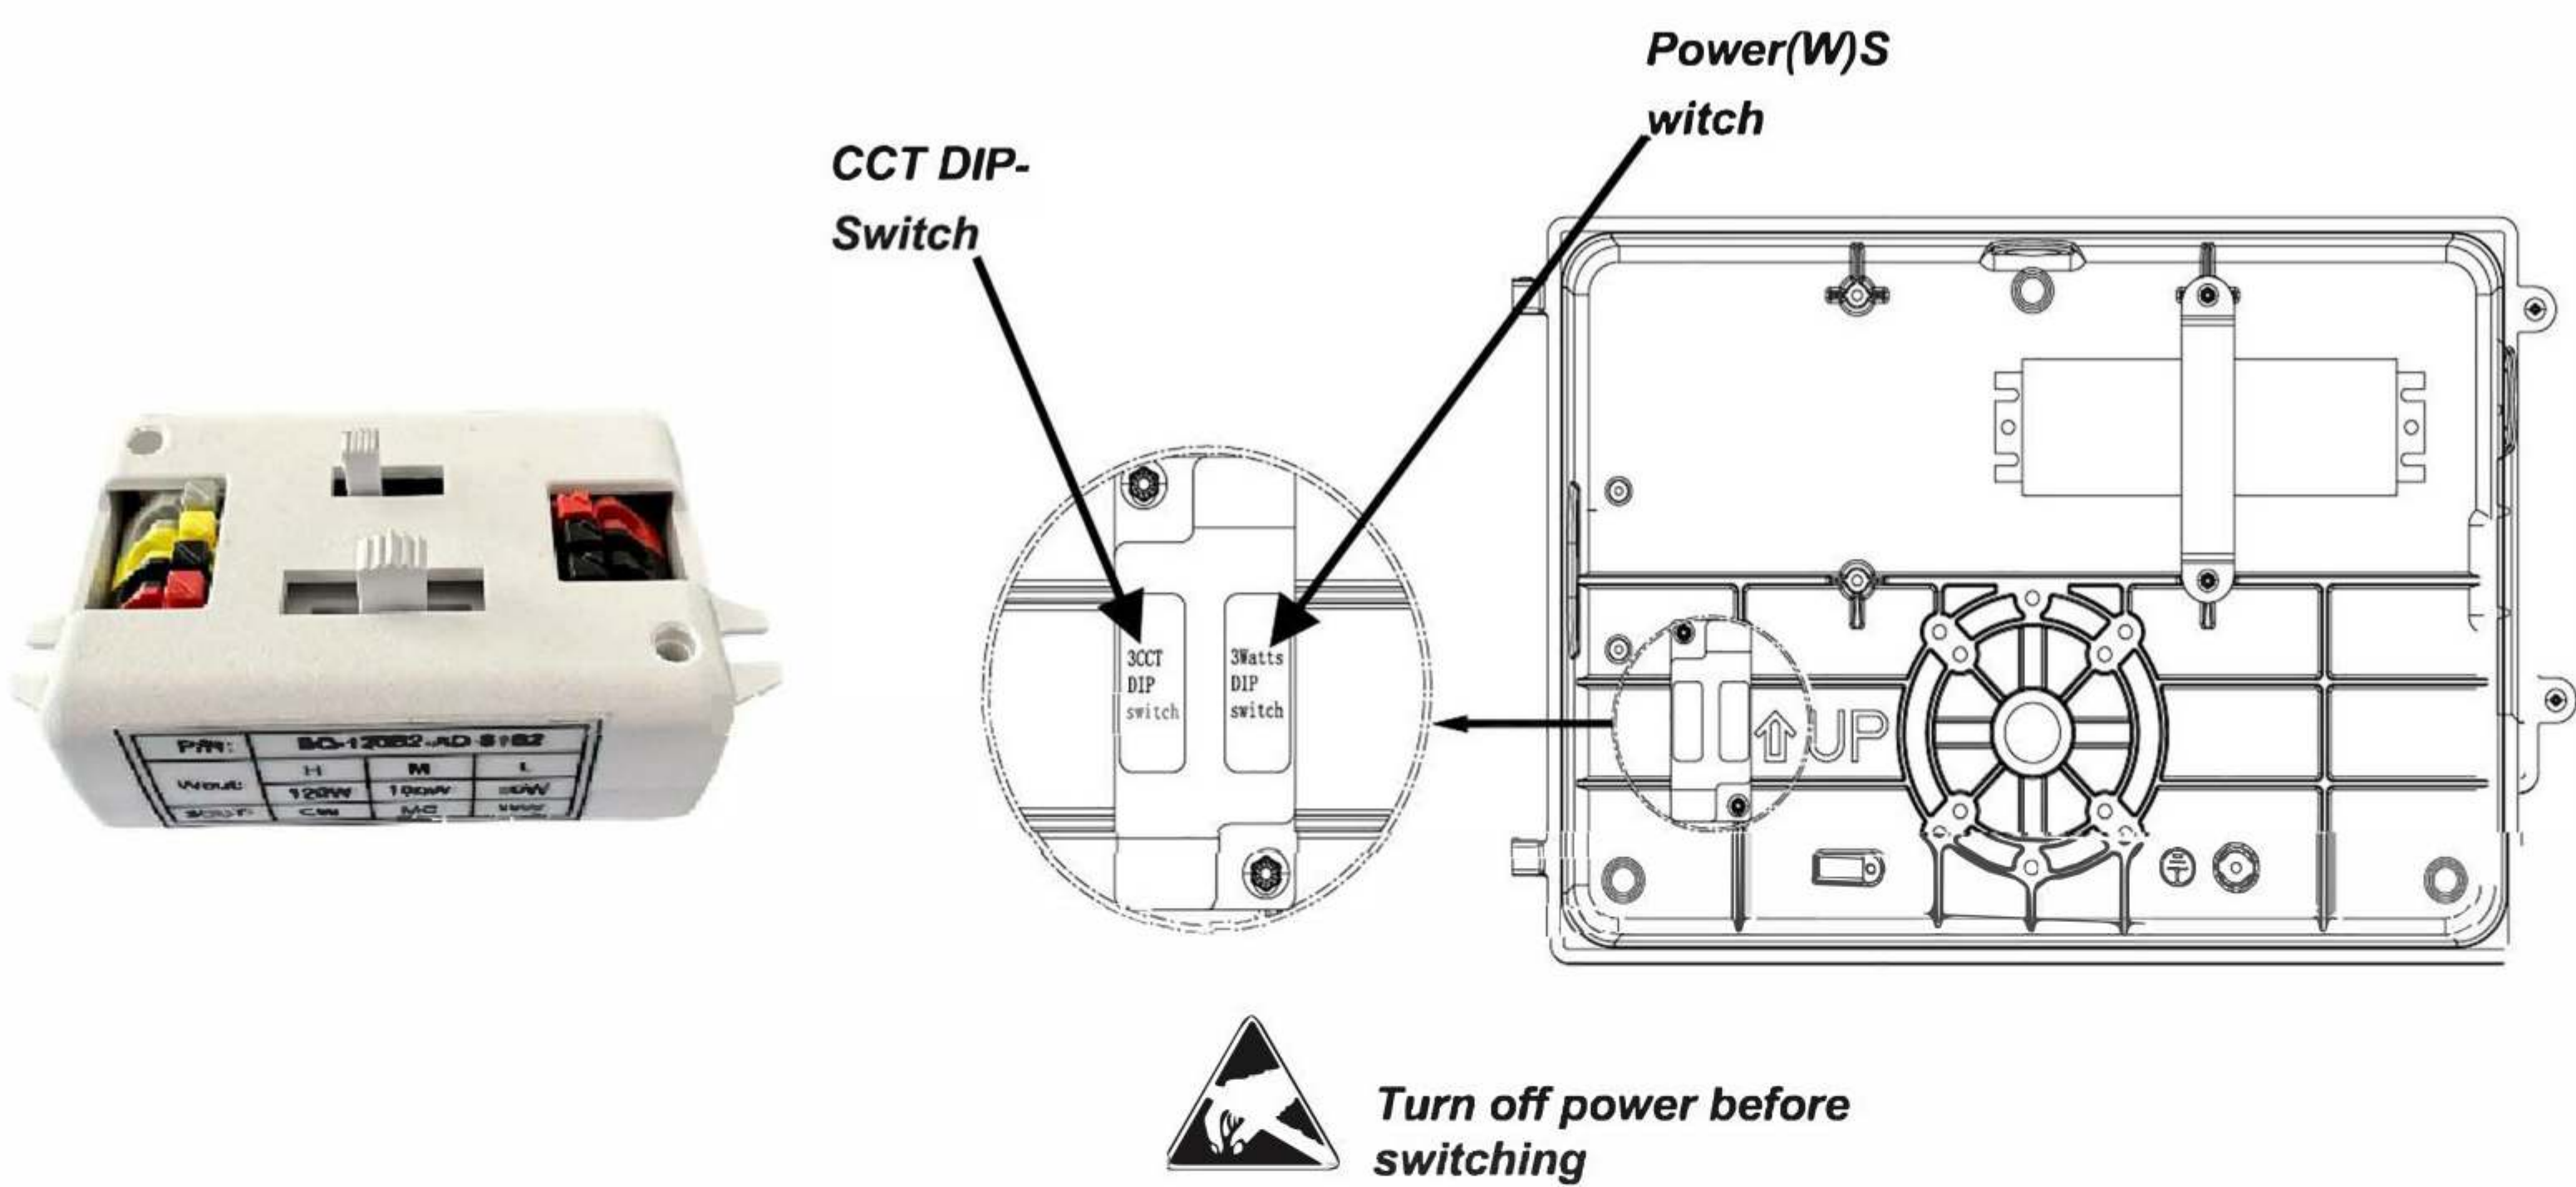

Lumen & Wattage Selectable

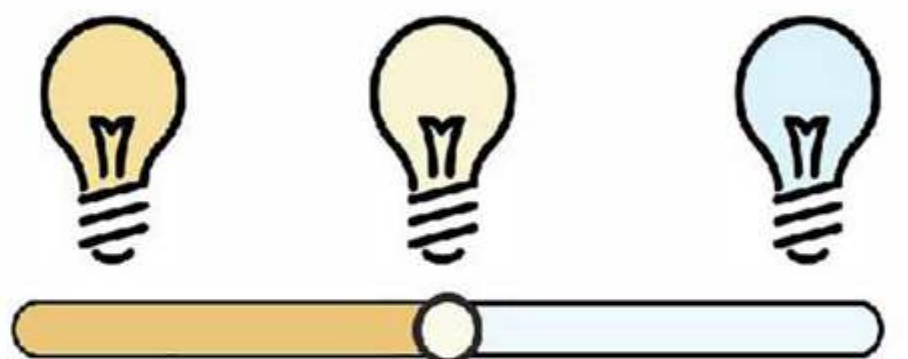

CCT Selectable

USAGE SCENARIO



Automatically OFF



Automatically ON



Remove Philips Screw Cover



Adjust the Wattage & CCT by DIP Switch

LED WALLPACK LIGHT

Key Features:




- 130lm/W
- 0-10V dimming
- UL cUL DLC 5.1 Premium listed
- Die-cast aluminum housing and glass lens
- Selectable photocell



I SPECIFICATION

Model No	Power	Voltage	CCT	CRI	Lumens
ML-WPB4-60/40/30W	60/40/30W	100-277V 120-347V 277-480V	3000K,4000K,5000K,5700K	>70	130lm/w
ML-WPB4-120/100/80W	120/100/80W		3000K,4000K,5000K,5700K	>70	130lm/w

I DIMENSIONS

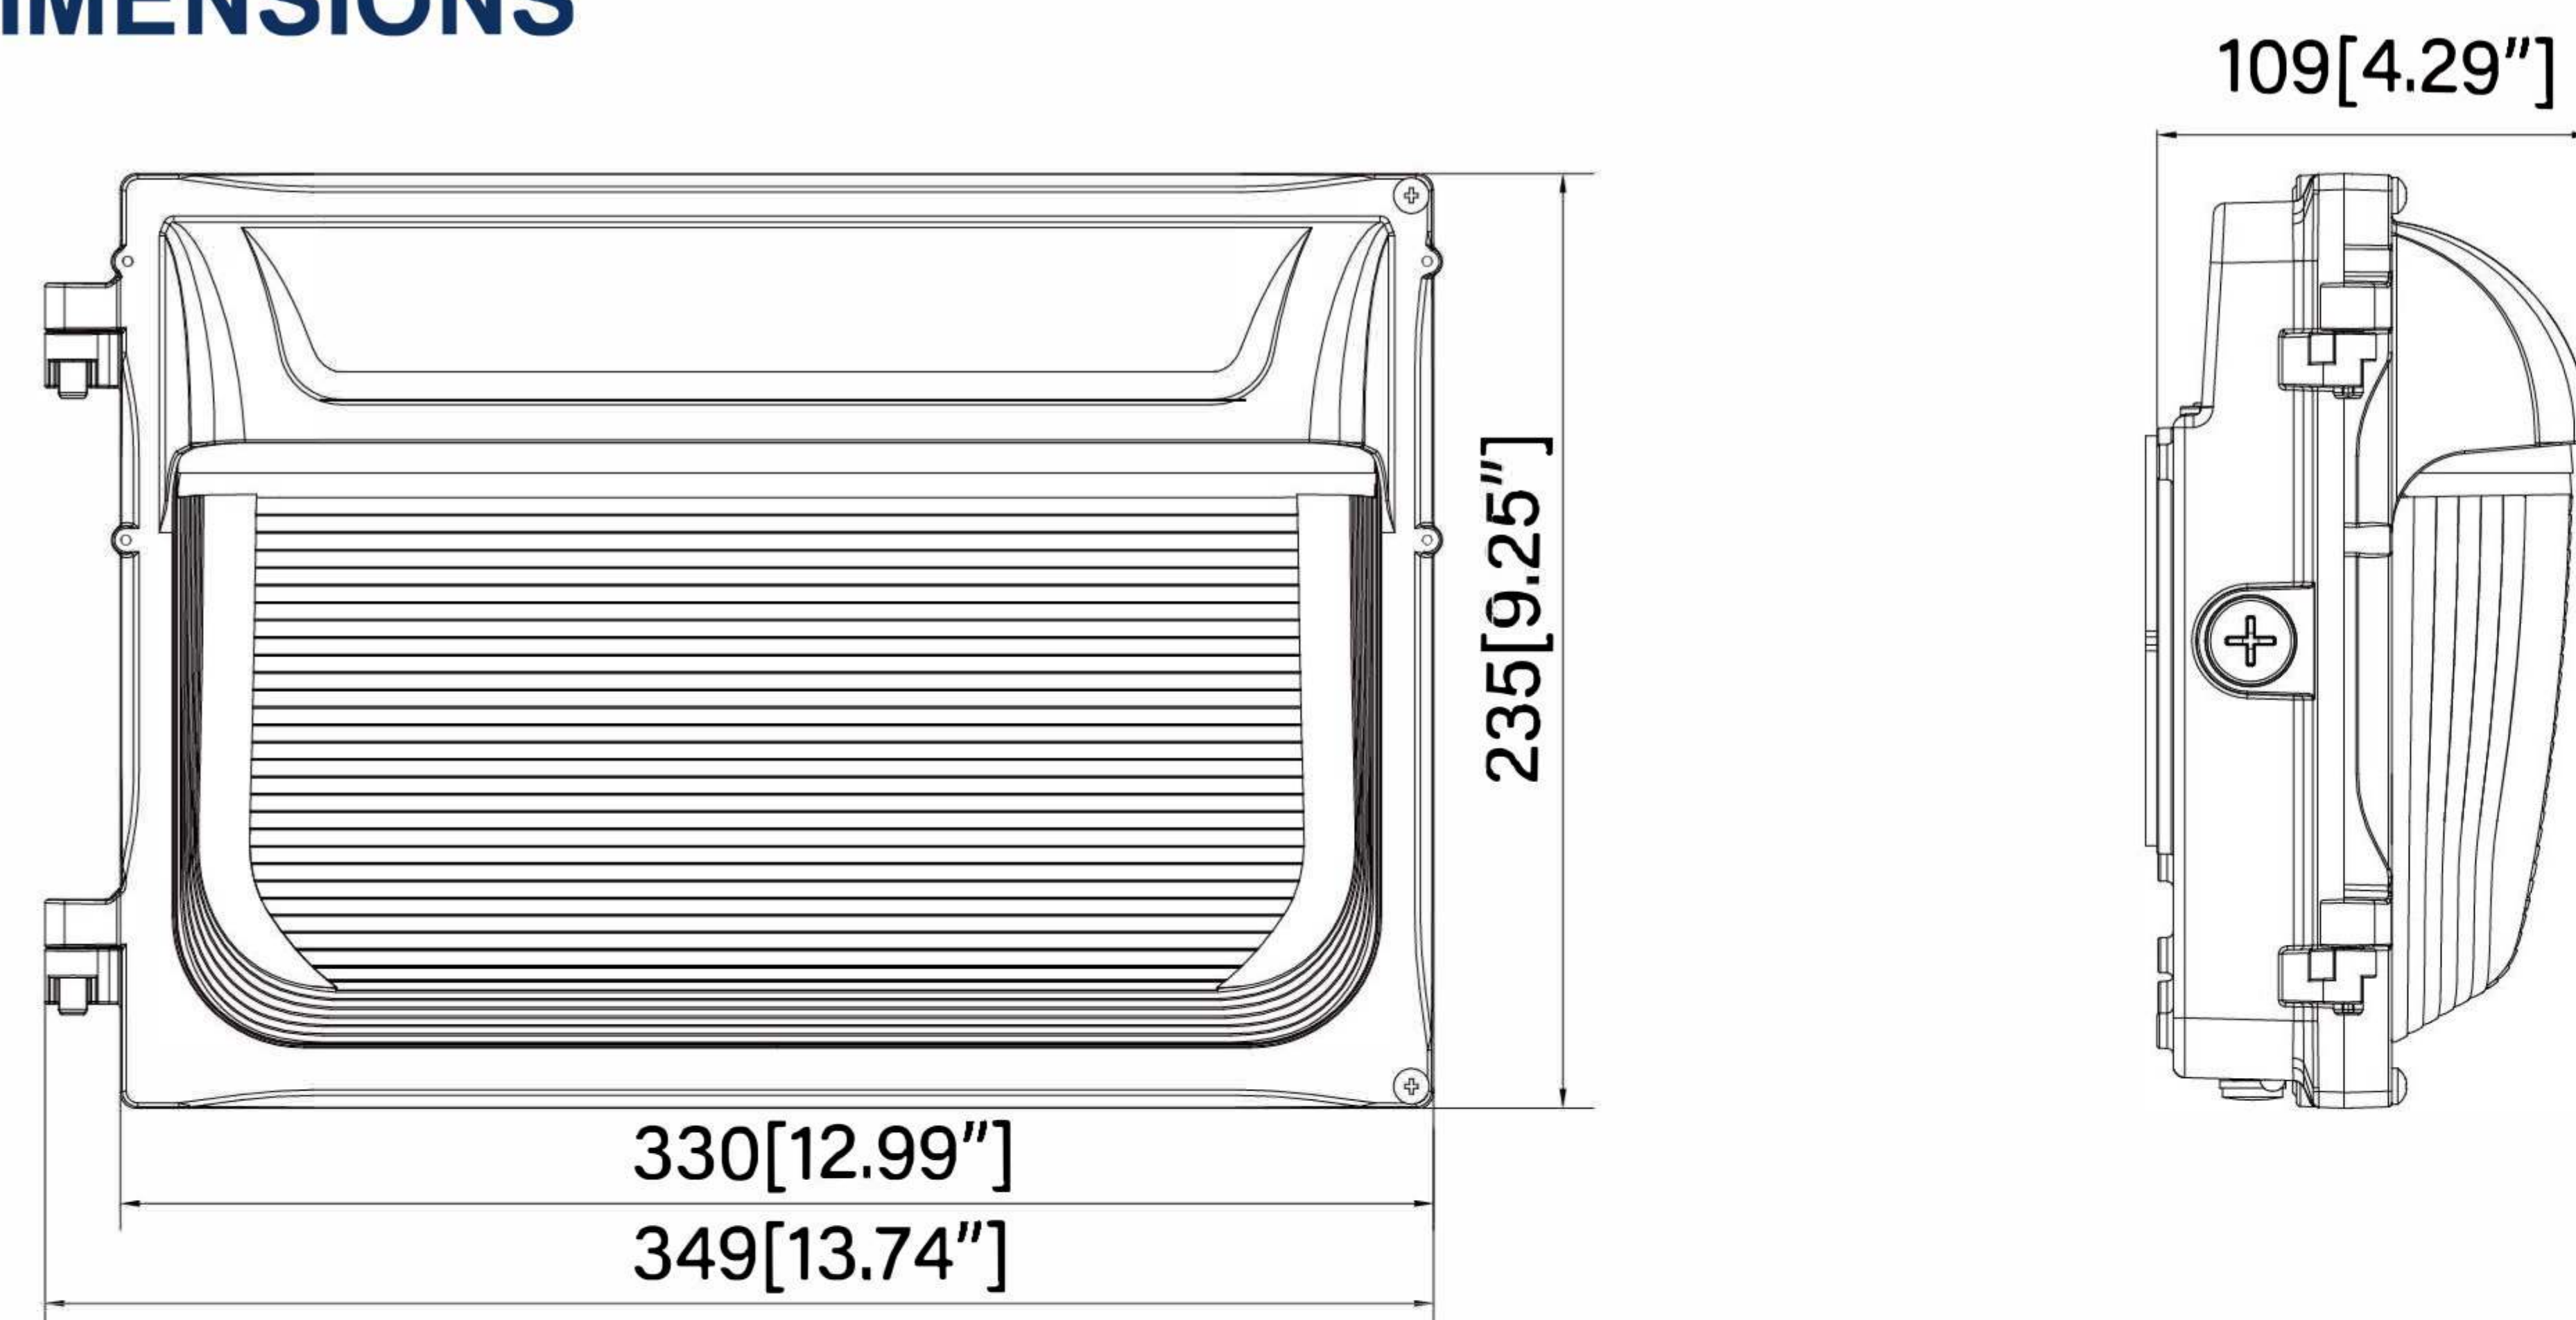

I ADDITIONAL ACCESSORY



House shield



Photocell

FULL CUT OFF WALL PACK

Key Features:




- 135lm/W
- 0-10V dimming
- UL cUL DLC 5.1 Premium listed
- Aluminum housing and UV resistant polycarbonate lens
- Photocell controllable



I SPECIFICATION

Model No	Power	Voltage	CCT	CRI	Lumens
ML-WPC3-40W/30W/20W	40/30/20W	100-277V 120-347V 277-480V	3000K,4000K,5000K,5700K	>80	135lm/w
ML-WPC3-80W/60W/40W	80/60/40W		3000K,4000K,5000K,5700K	>80	135lm/w
ML-WPC3-100W/80W/60W	100/80/60W		3000K,4000K,5000K,5700K	>80	135lm/w

I DIMENSIONS

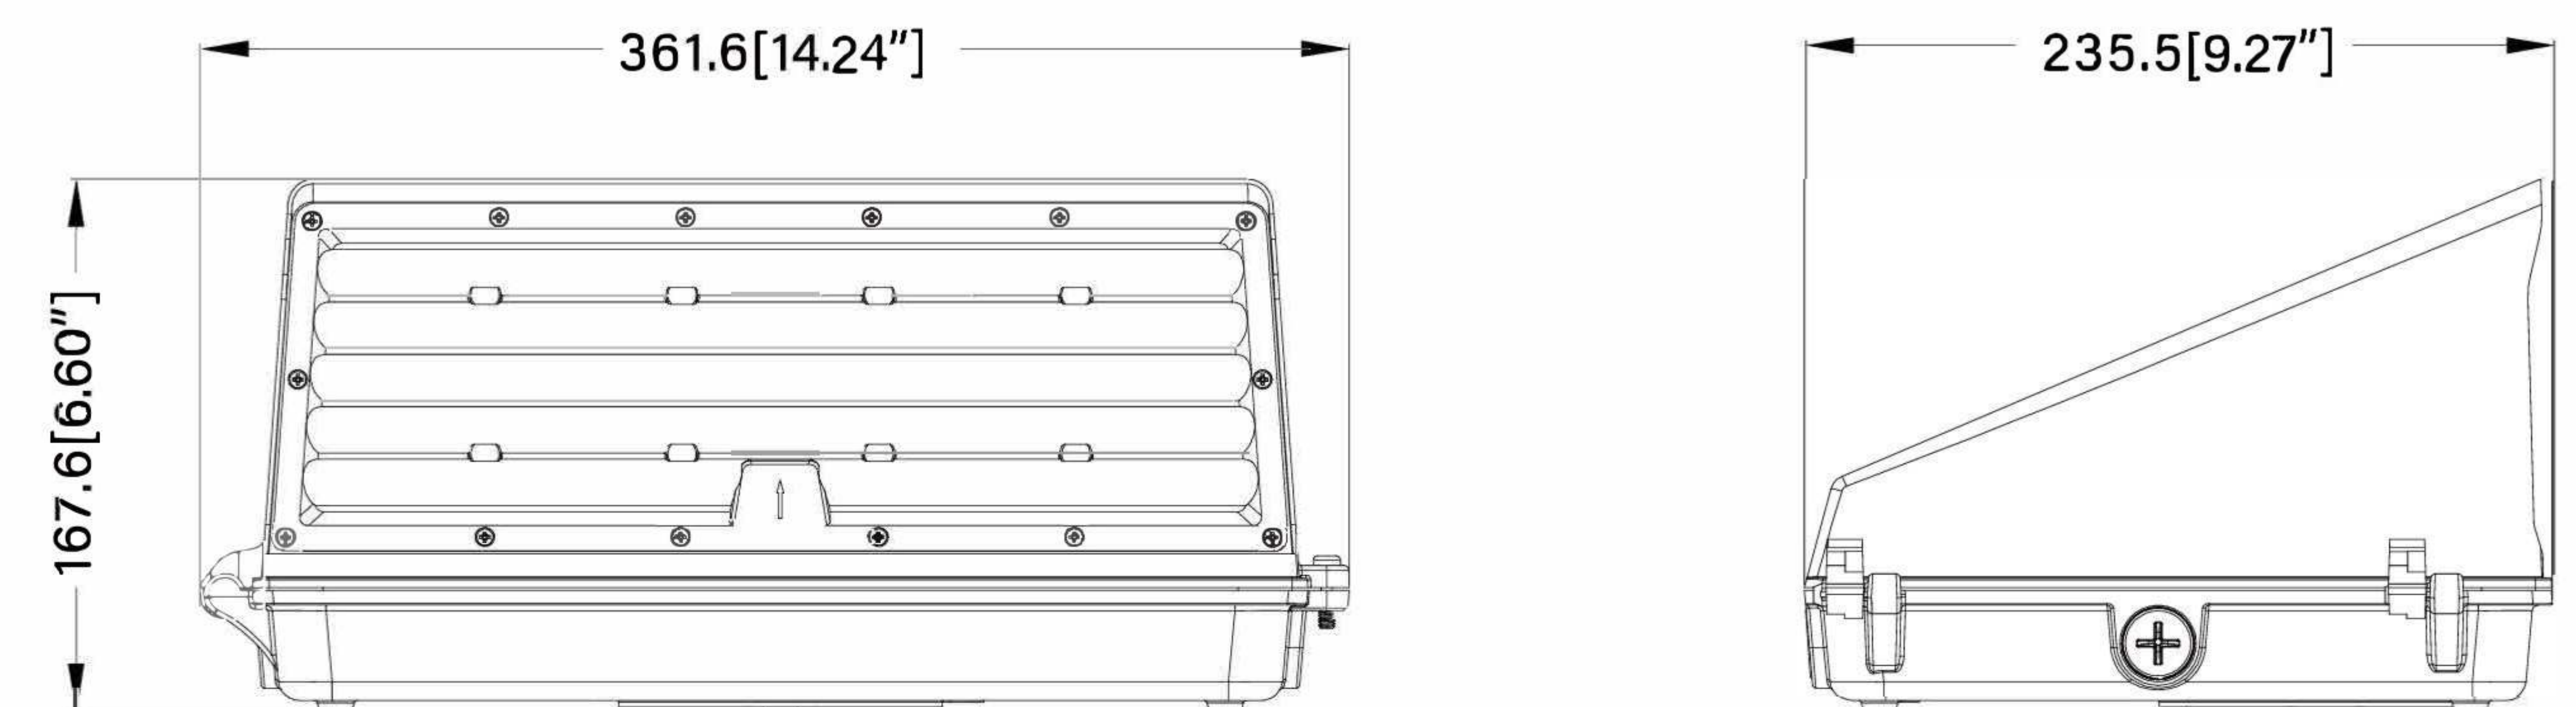

40W/60W/80W/100W

I ADDITIONAL ACCESSORY



Photocell

LED PARKING LOT LIGHT/ STREET LIGHT



Key Features:



- Unique Heavy Duty Die-cast Aluminum Housing
- CCT & Wattage Selectable for Easy Inventory Reserve
- 10KV Surge Protection
- Type III,IV,V Lighting Distribution
- Lumen Efficacy up to 180LM/W
- Anti-Glare Lens
- IP65 Wet Location
- Photocell, Motion Sensor for optional



I SPECIFICATION

Model No	Power	Voltage	CCT	CRI	Lumens
PLC-150W-S	75W-100W-150W Settable	100-277V/347V	3000K,4000K,5000K Settable	Ra>70	160lm/w
PLC-240W-S	150W-200W-240W Settable	100-277V/347V	3000K,4000K,5000K Settable	Ra>70	160lm/w
PLC-300W-S	200W-240W-300W Settable	100-277V/347V	3000K-4000K-5000K Settable	Ra>70	160lm/w
PLC-50W	50W	100-277V/347V/480V	3000K,4000K,5000K,6000K	Ra>70	160lm/w
PLC-75W	75W	100-277V/347V/480V	3000K,4000K,5000K,6000K	Ra>70	160lm/w
PLC-100W	100W	100-277V/347V/480V	3000K,4000K,5000K,6000K	Ra>70	160lm/w
PLC-150W	150W	100-277V/347V/480V	3000K,4000K,5000K,6000K	Ra>70	160lm/w
PLC-200W	200W	100-277V/347V/480V	3000K,4000K,5000K,6000K	Ra>70	160lm/w
PLC-240W	240W	100-277V/347V/480V	3000K,4000K,5000K,6000K	Ra>70	160lm/w
PLC-300W	300W	100-277V/347V/480V	3000K,4000K,5000K,6000K	Ra>70	160lm/w
PLC-450W	450W	100-277V/347V/480V	3000K,4000K,5000K,6000K	Ra>70	160lm/w

I DIMENSIONS

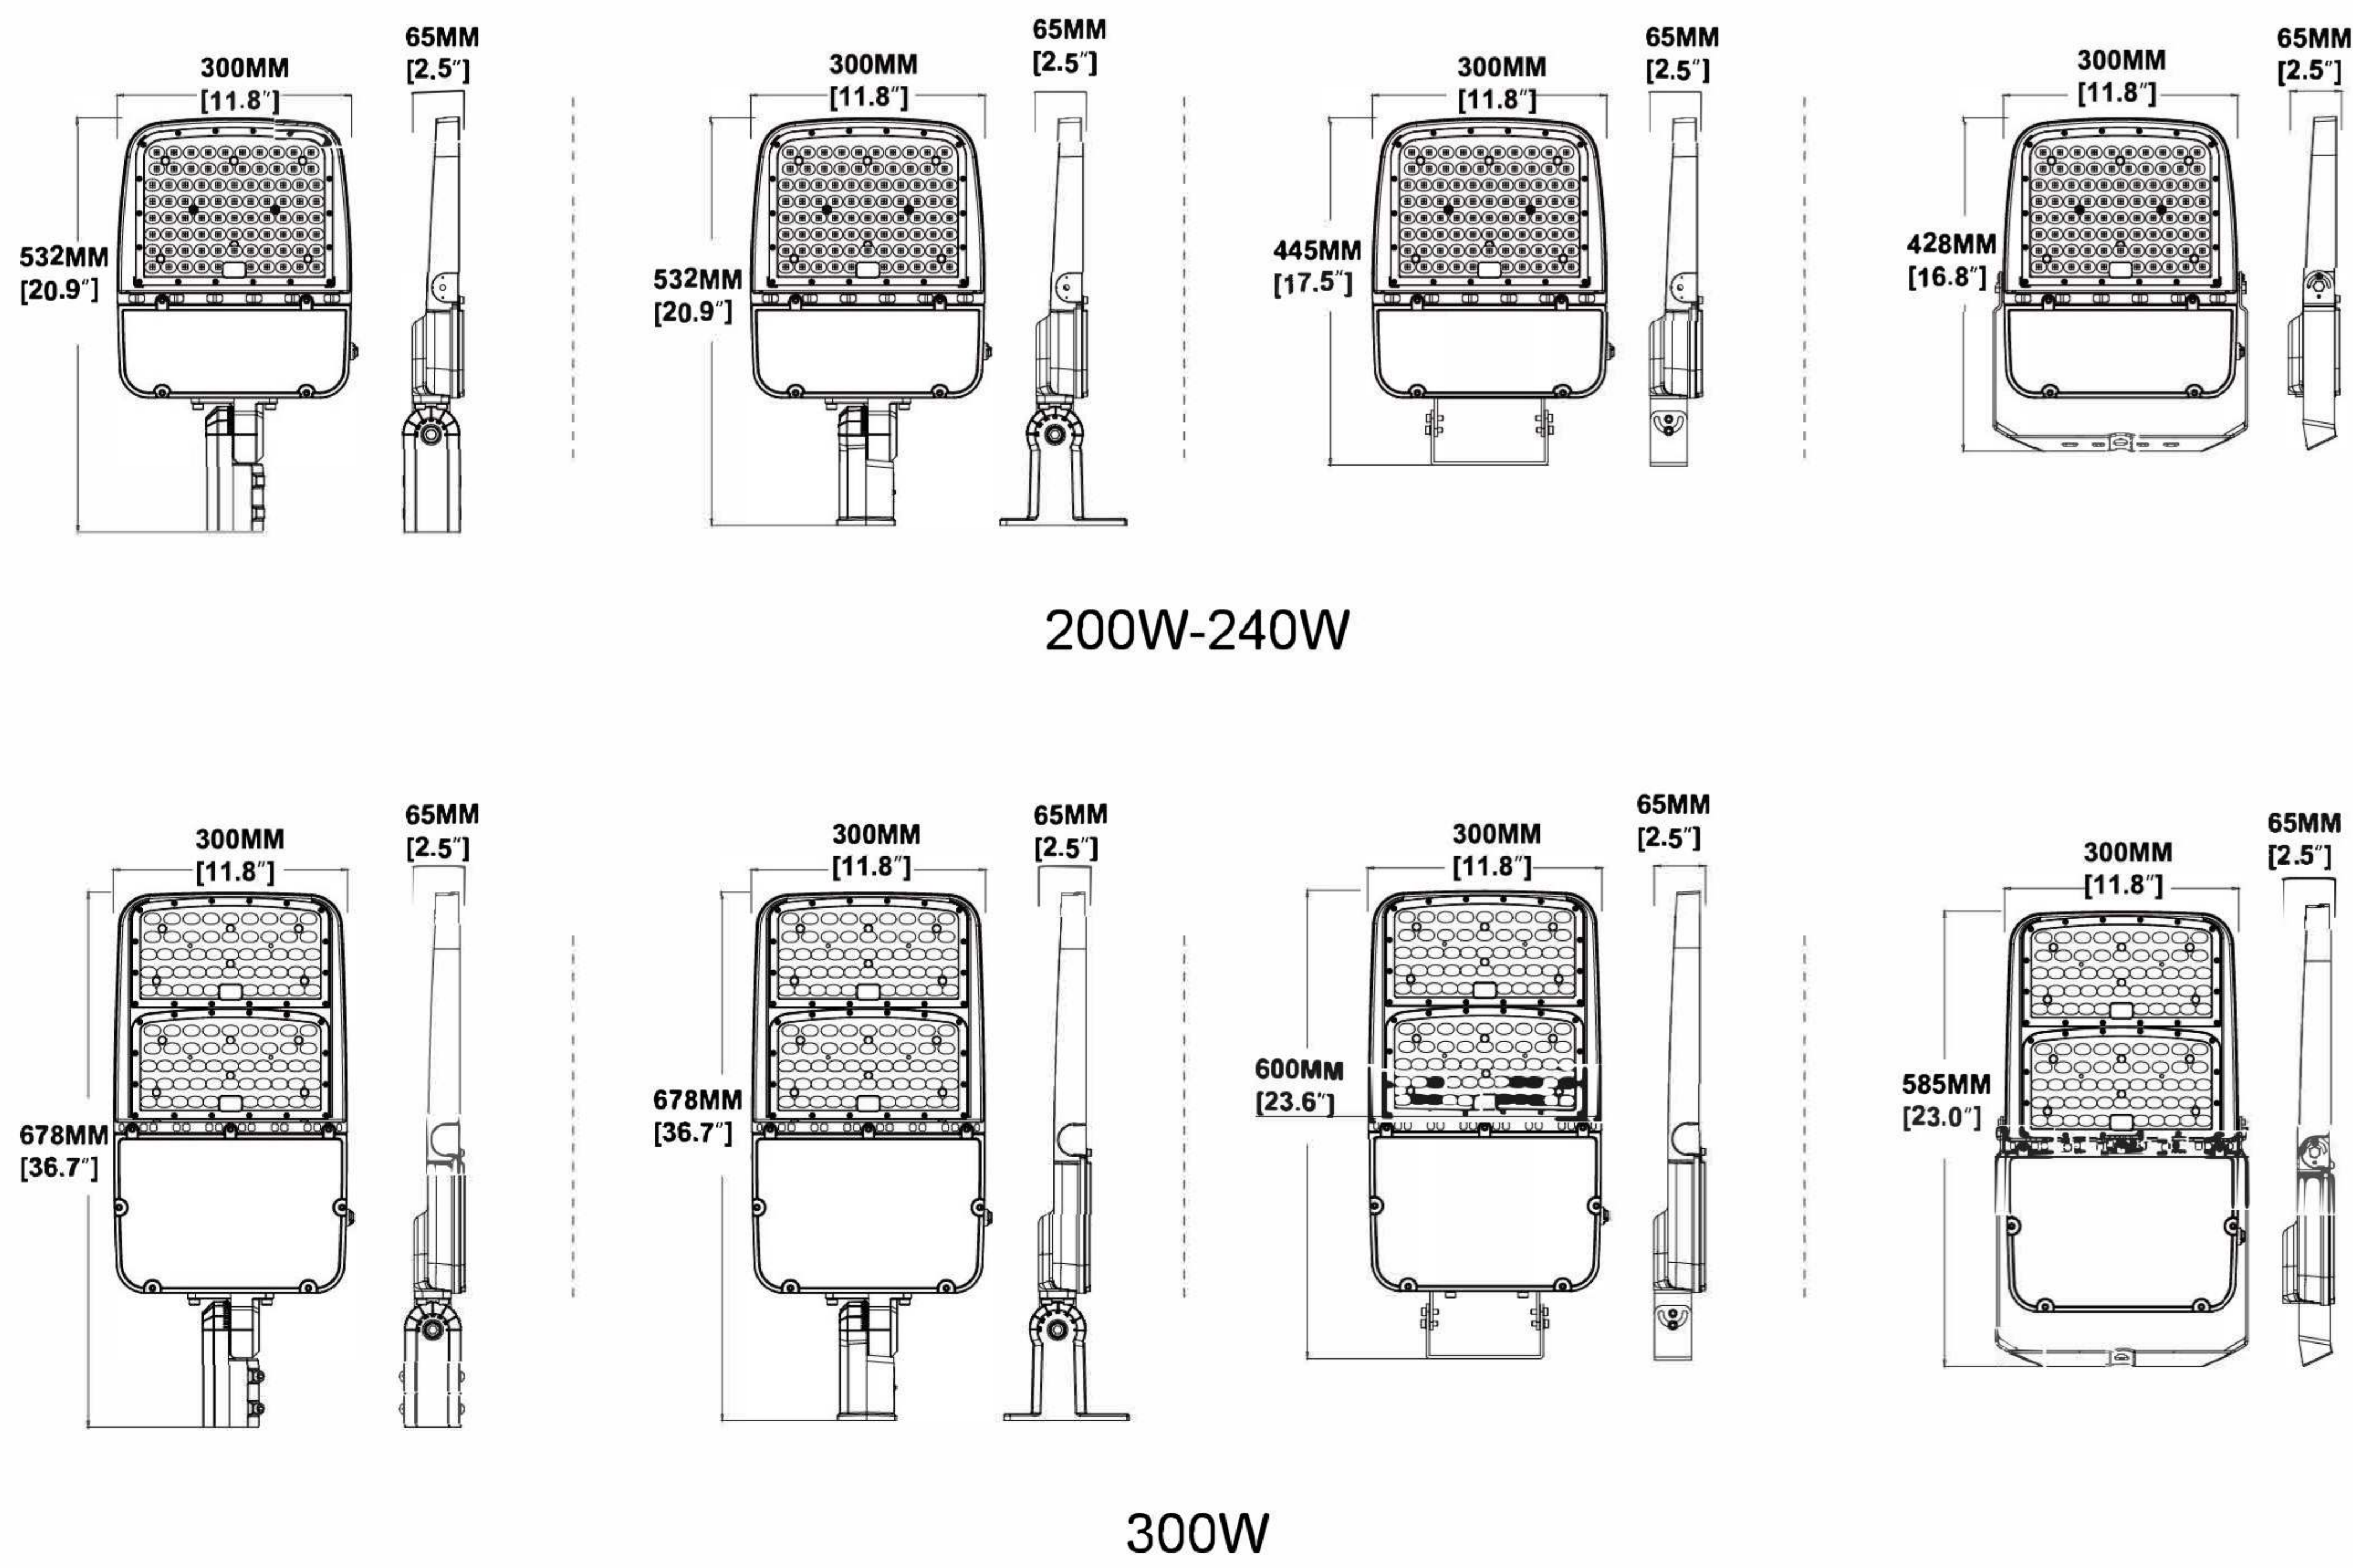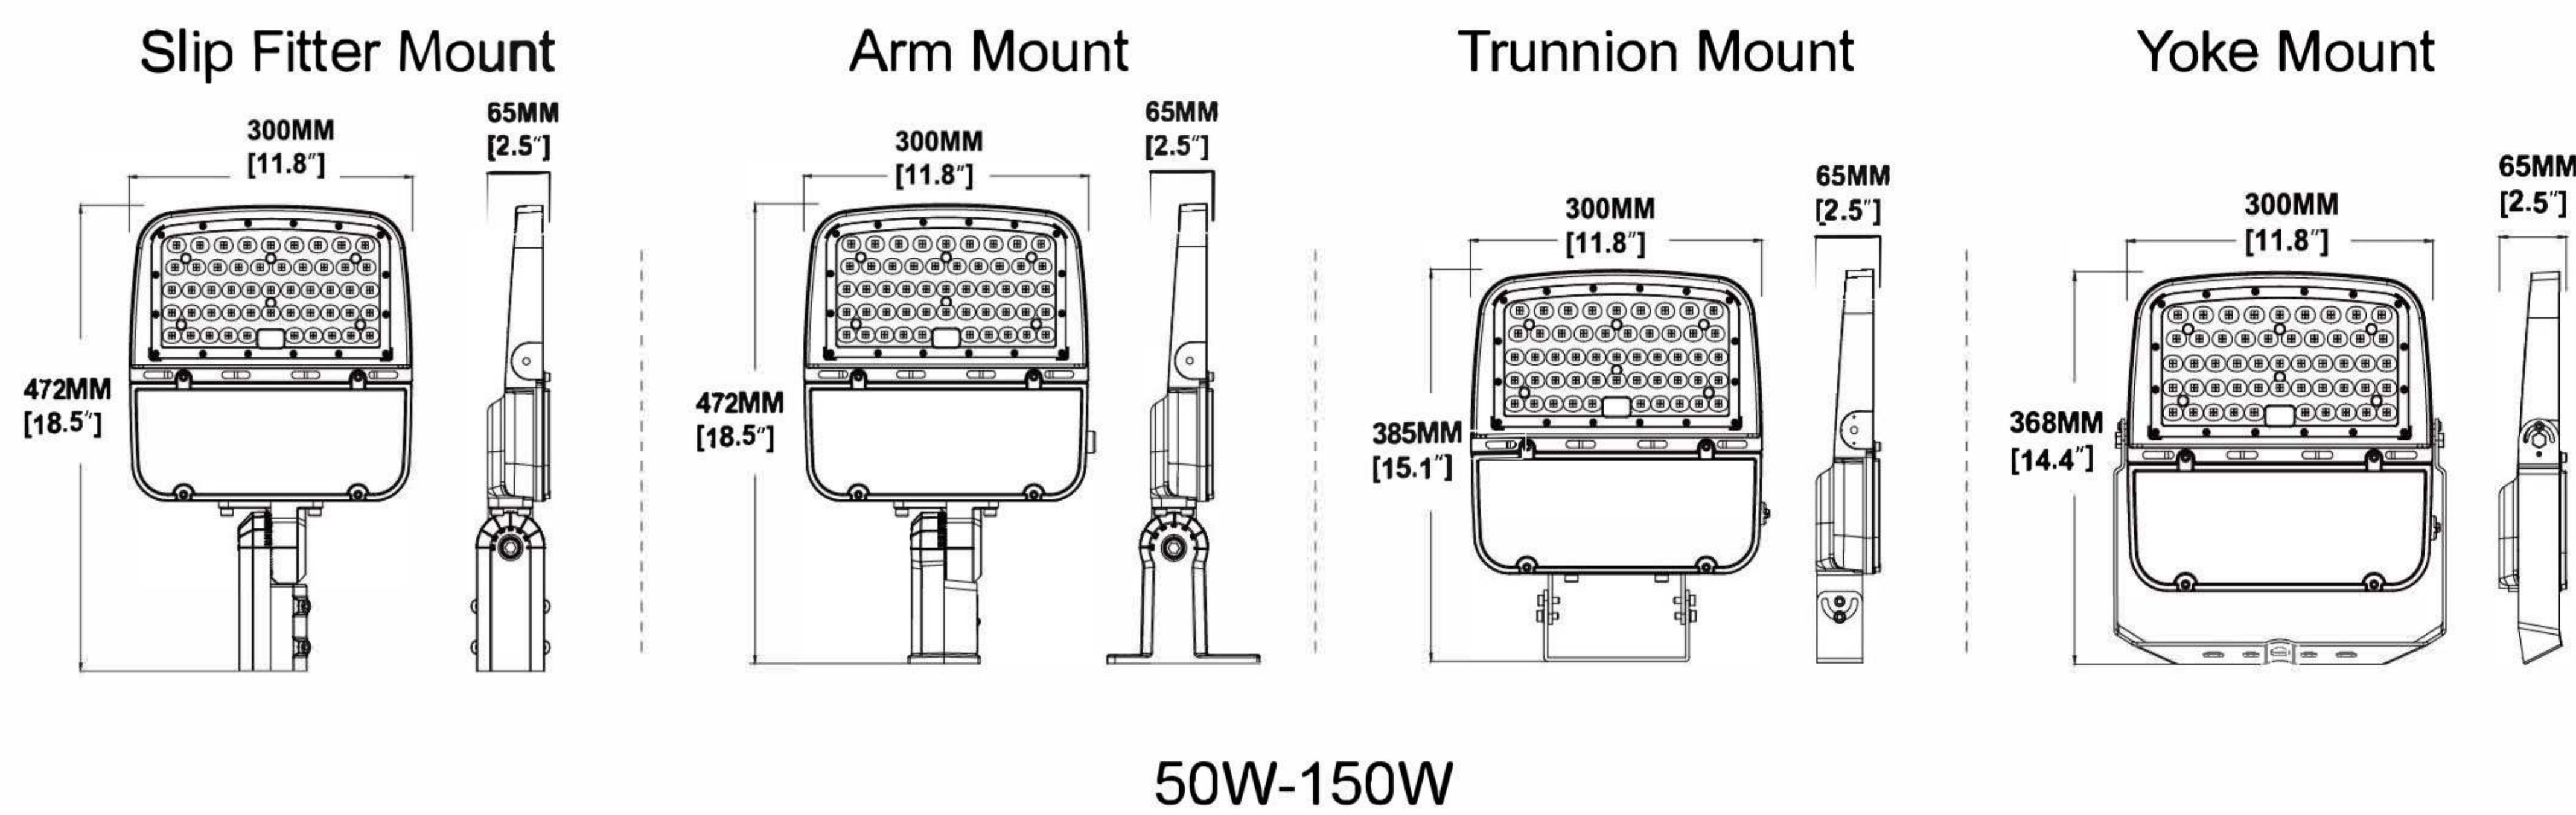


I ADDITIONAL ACCESSORY



Photocell




Motion Sensor

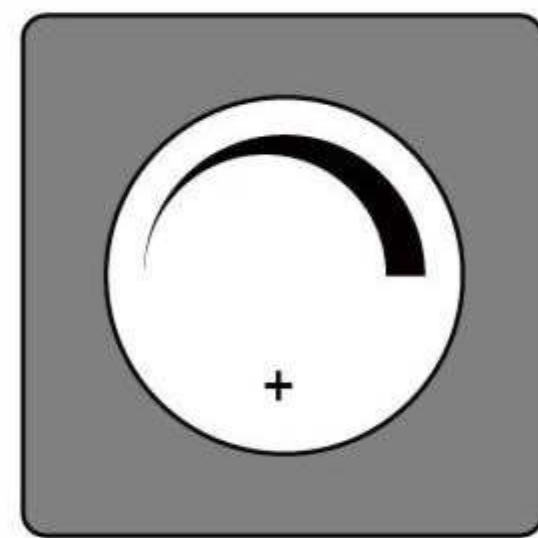

Dimming

I WATTAGE & CCT SELECTABLE

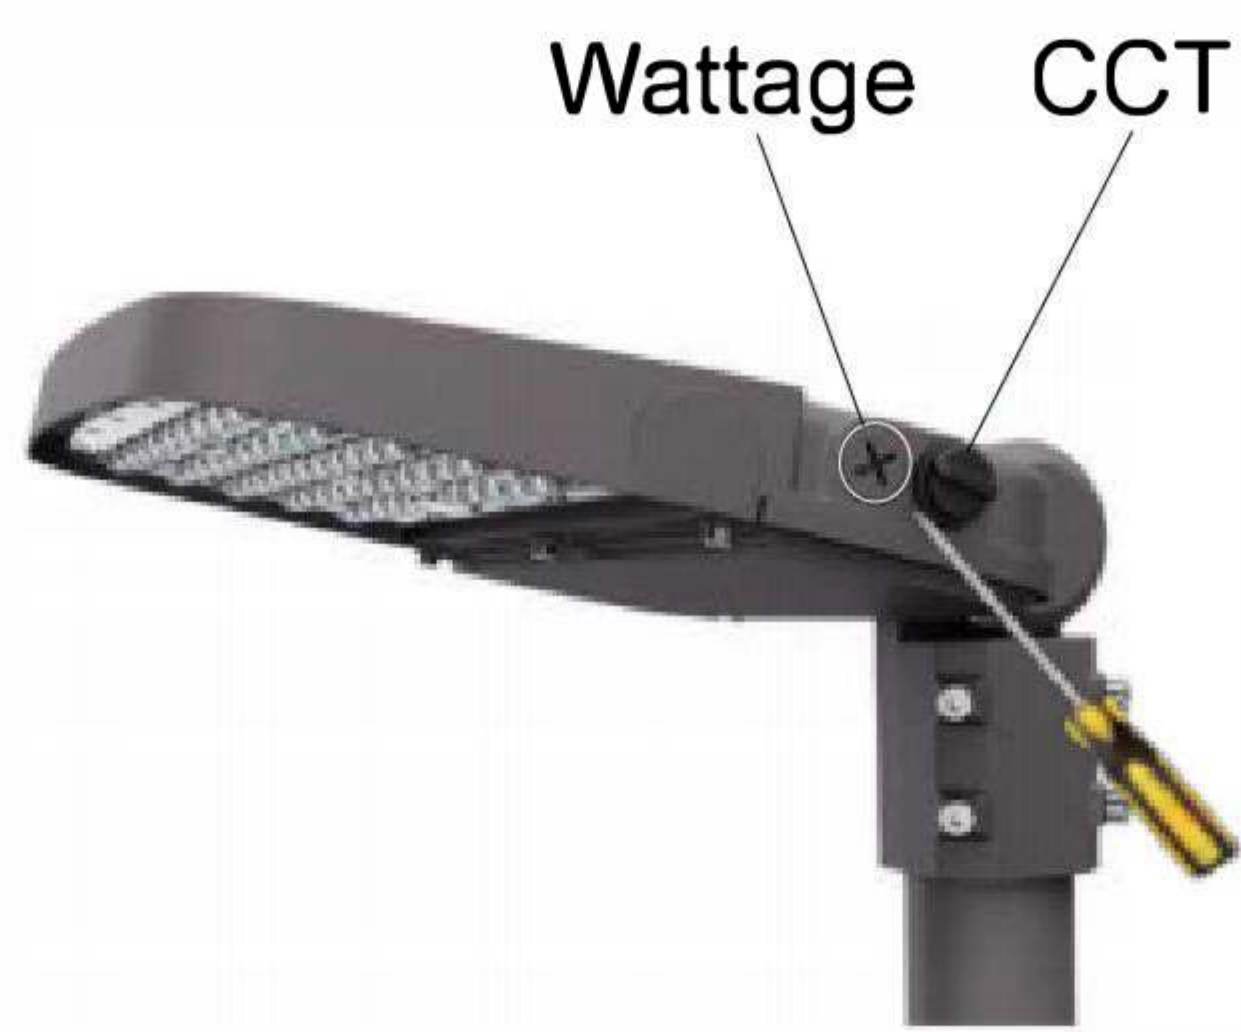

Remove Philips Screw Cover




Adjust the Wattage & CCT by DIP Switch

I MULTIPLE BRACKETS




I LIGHTING DISTRIBUTION

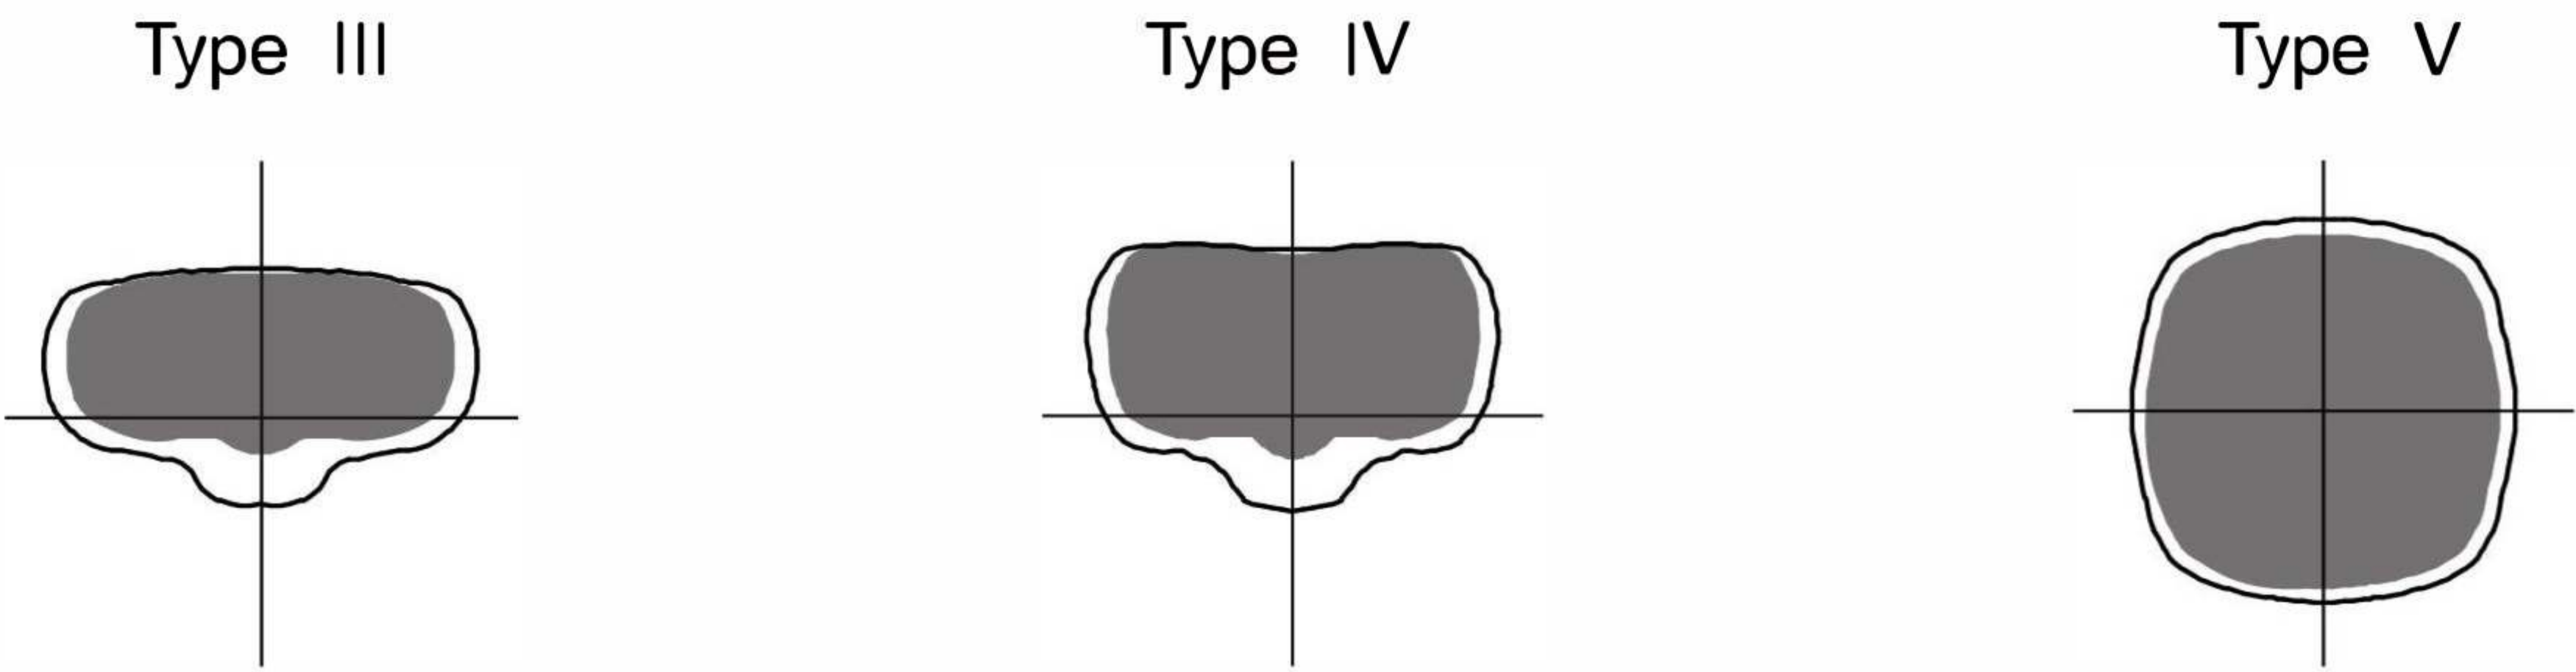

I LIGHTING DISTRIBUTION



I USAGE SCENARIO

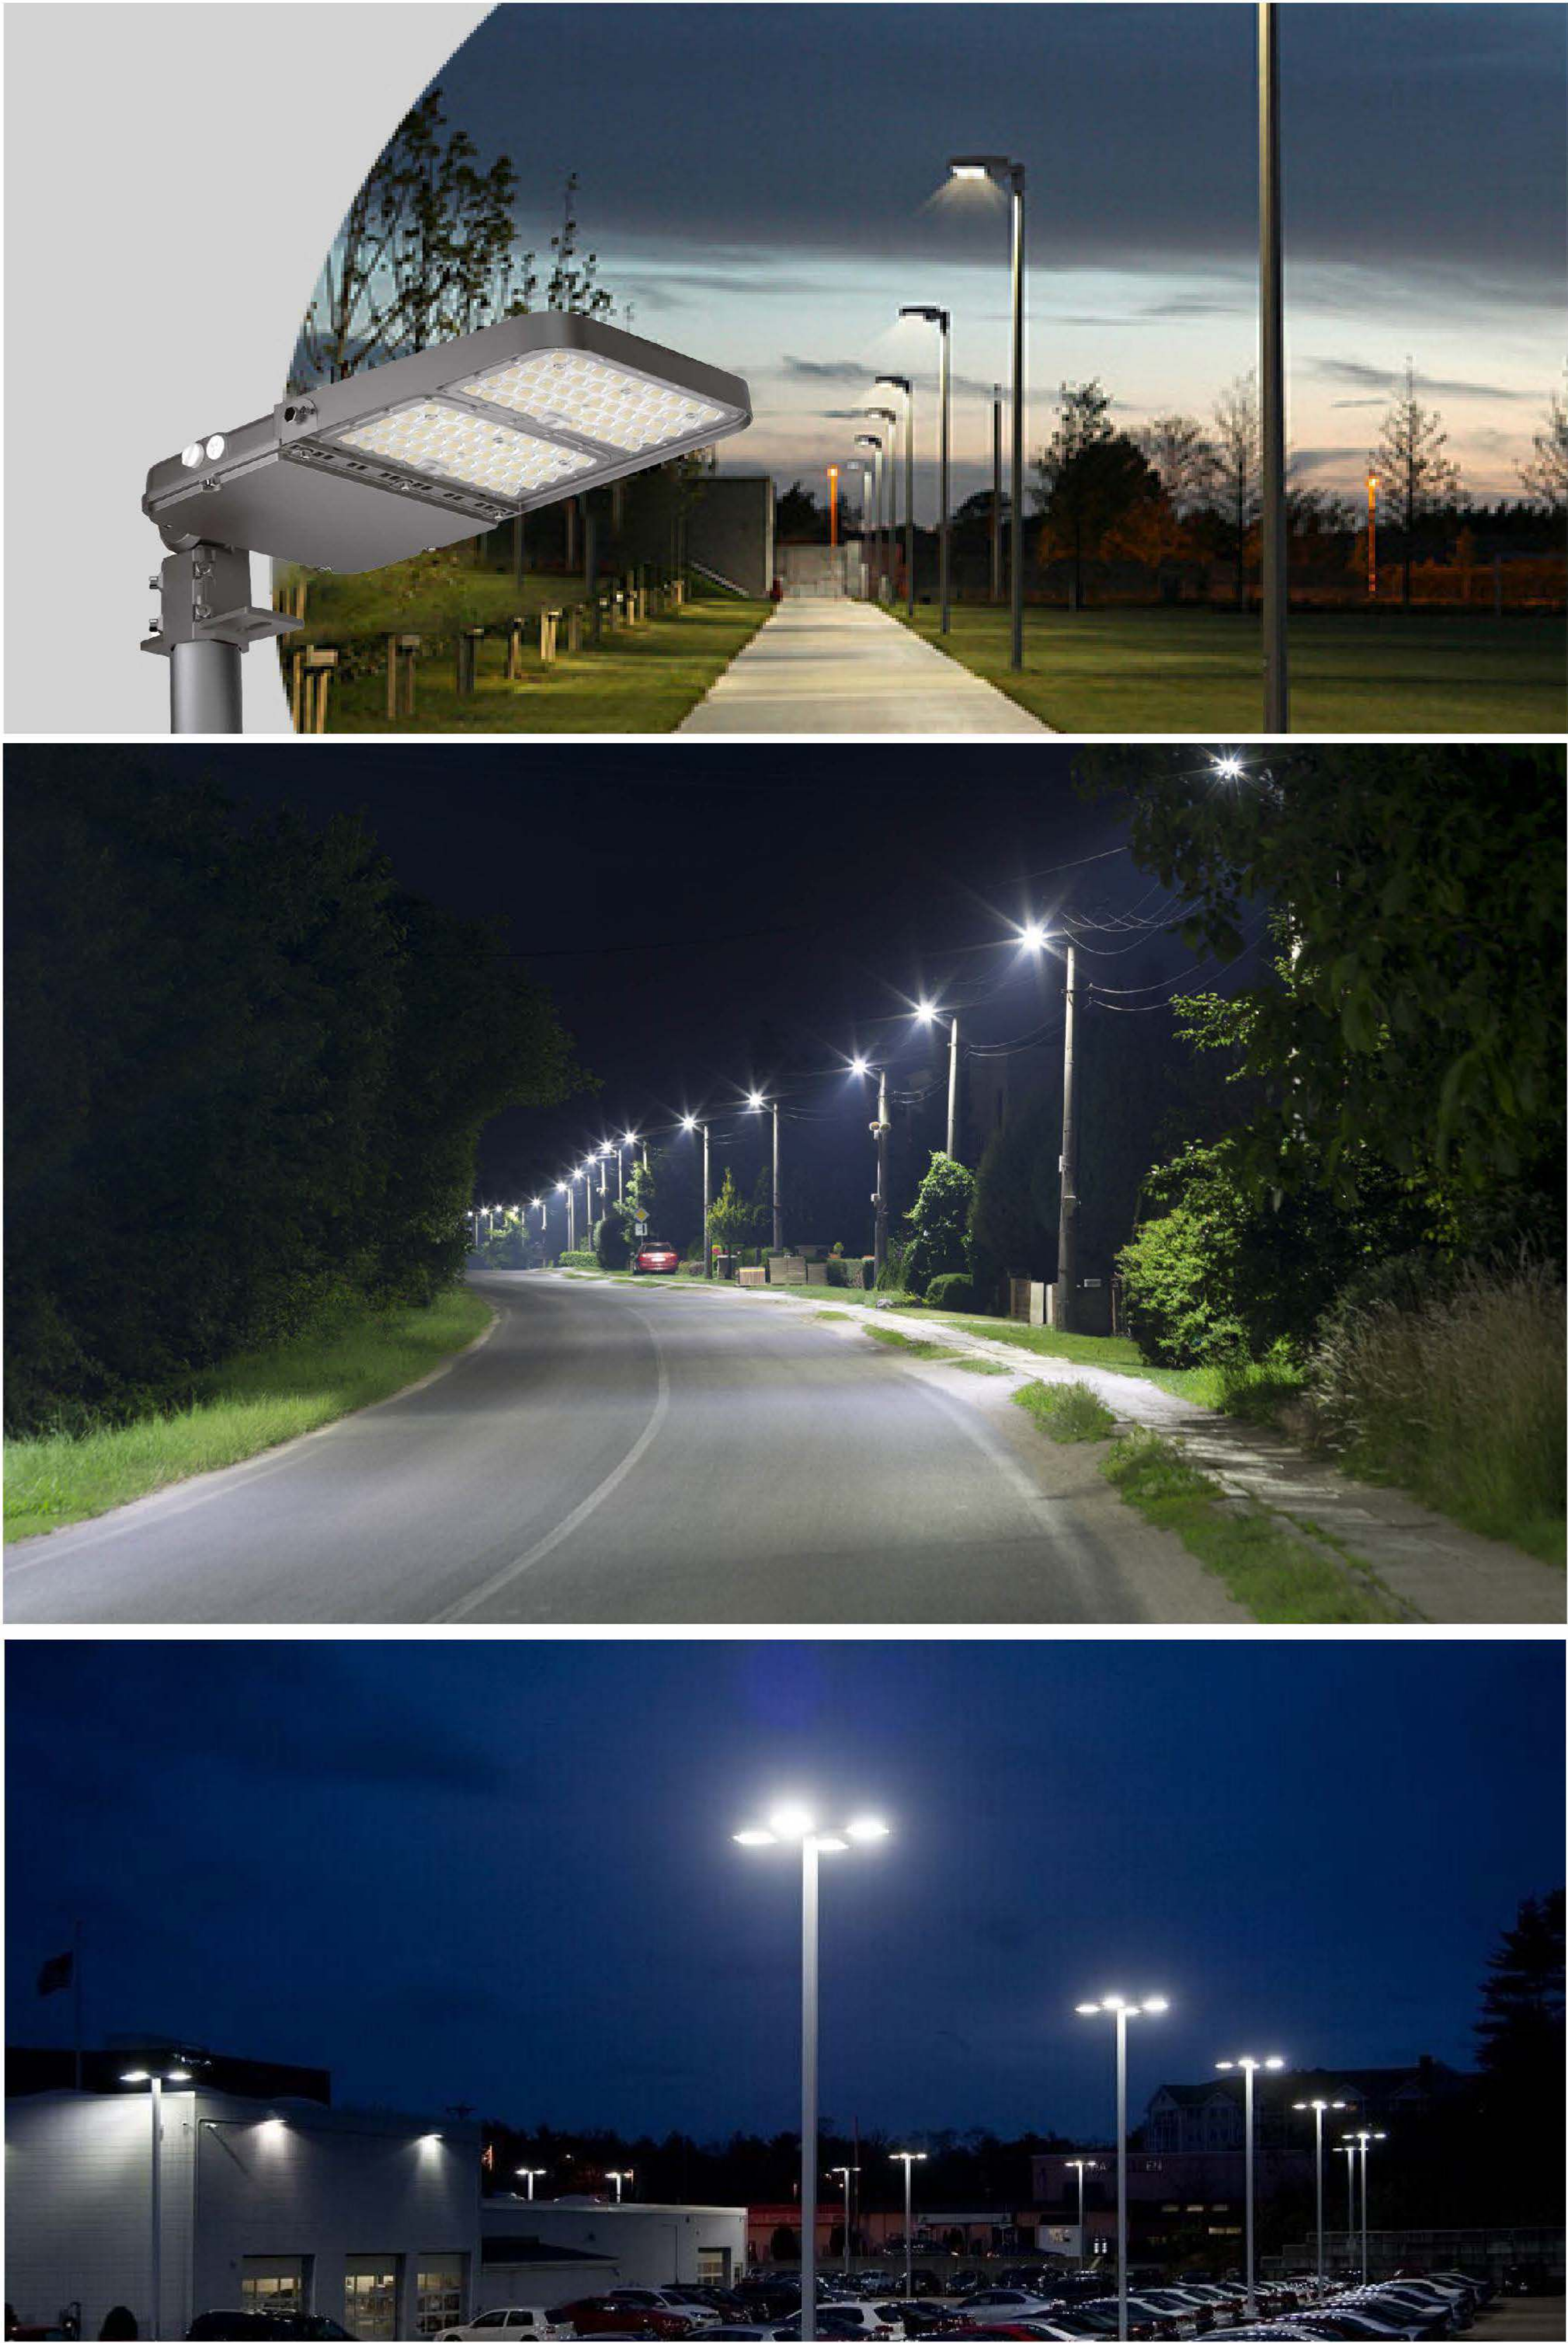

LED STREET LIGHT

Key Features:





- Unique Heavy Duty Die-cast Aluminum Housing
- Twist Lock Design of Driver Box for Easy Maintenance
- Type III,IV,V Lighting Distribution
- Lumen Efficacy 140LM/W
- IP65 Wet Location
- Motion Sensor for optional
- Meanwell Driver & Lumileds LED for Best Performance



I SPECIFICATION

Model No	Power	Voltage	CCT	CRI	Lumens
STL-50W	50W	100-277V/220-480V	3000K,4000K,5000K,5700K	Ra>70	140LM/W
STL-100W	100W	100-277V/220-480V	3000K,4000K,5000K,5700K	Ra>70	140LM/W
STL-150W	150W	100-277V/220-480V	3000K,4000K,5000K,5700K	Ra>70	140LM/W
STL-200W	200W	100-277V/220-480V	3000K,4000K,5000K,5700K	Ra>70	140LM/W


I DIMENSIONS

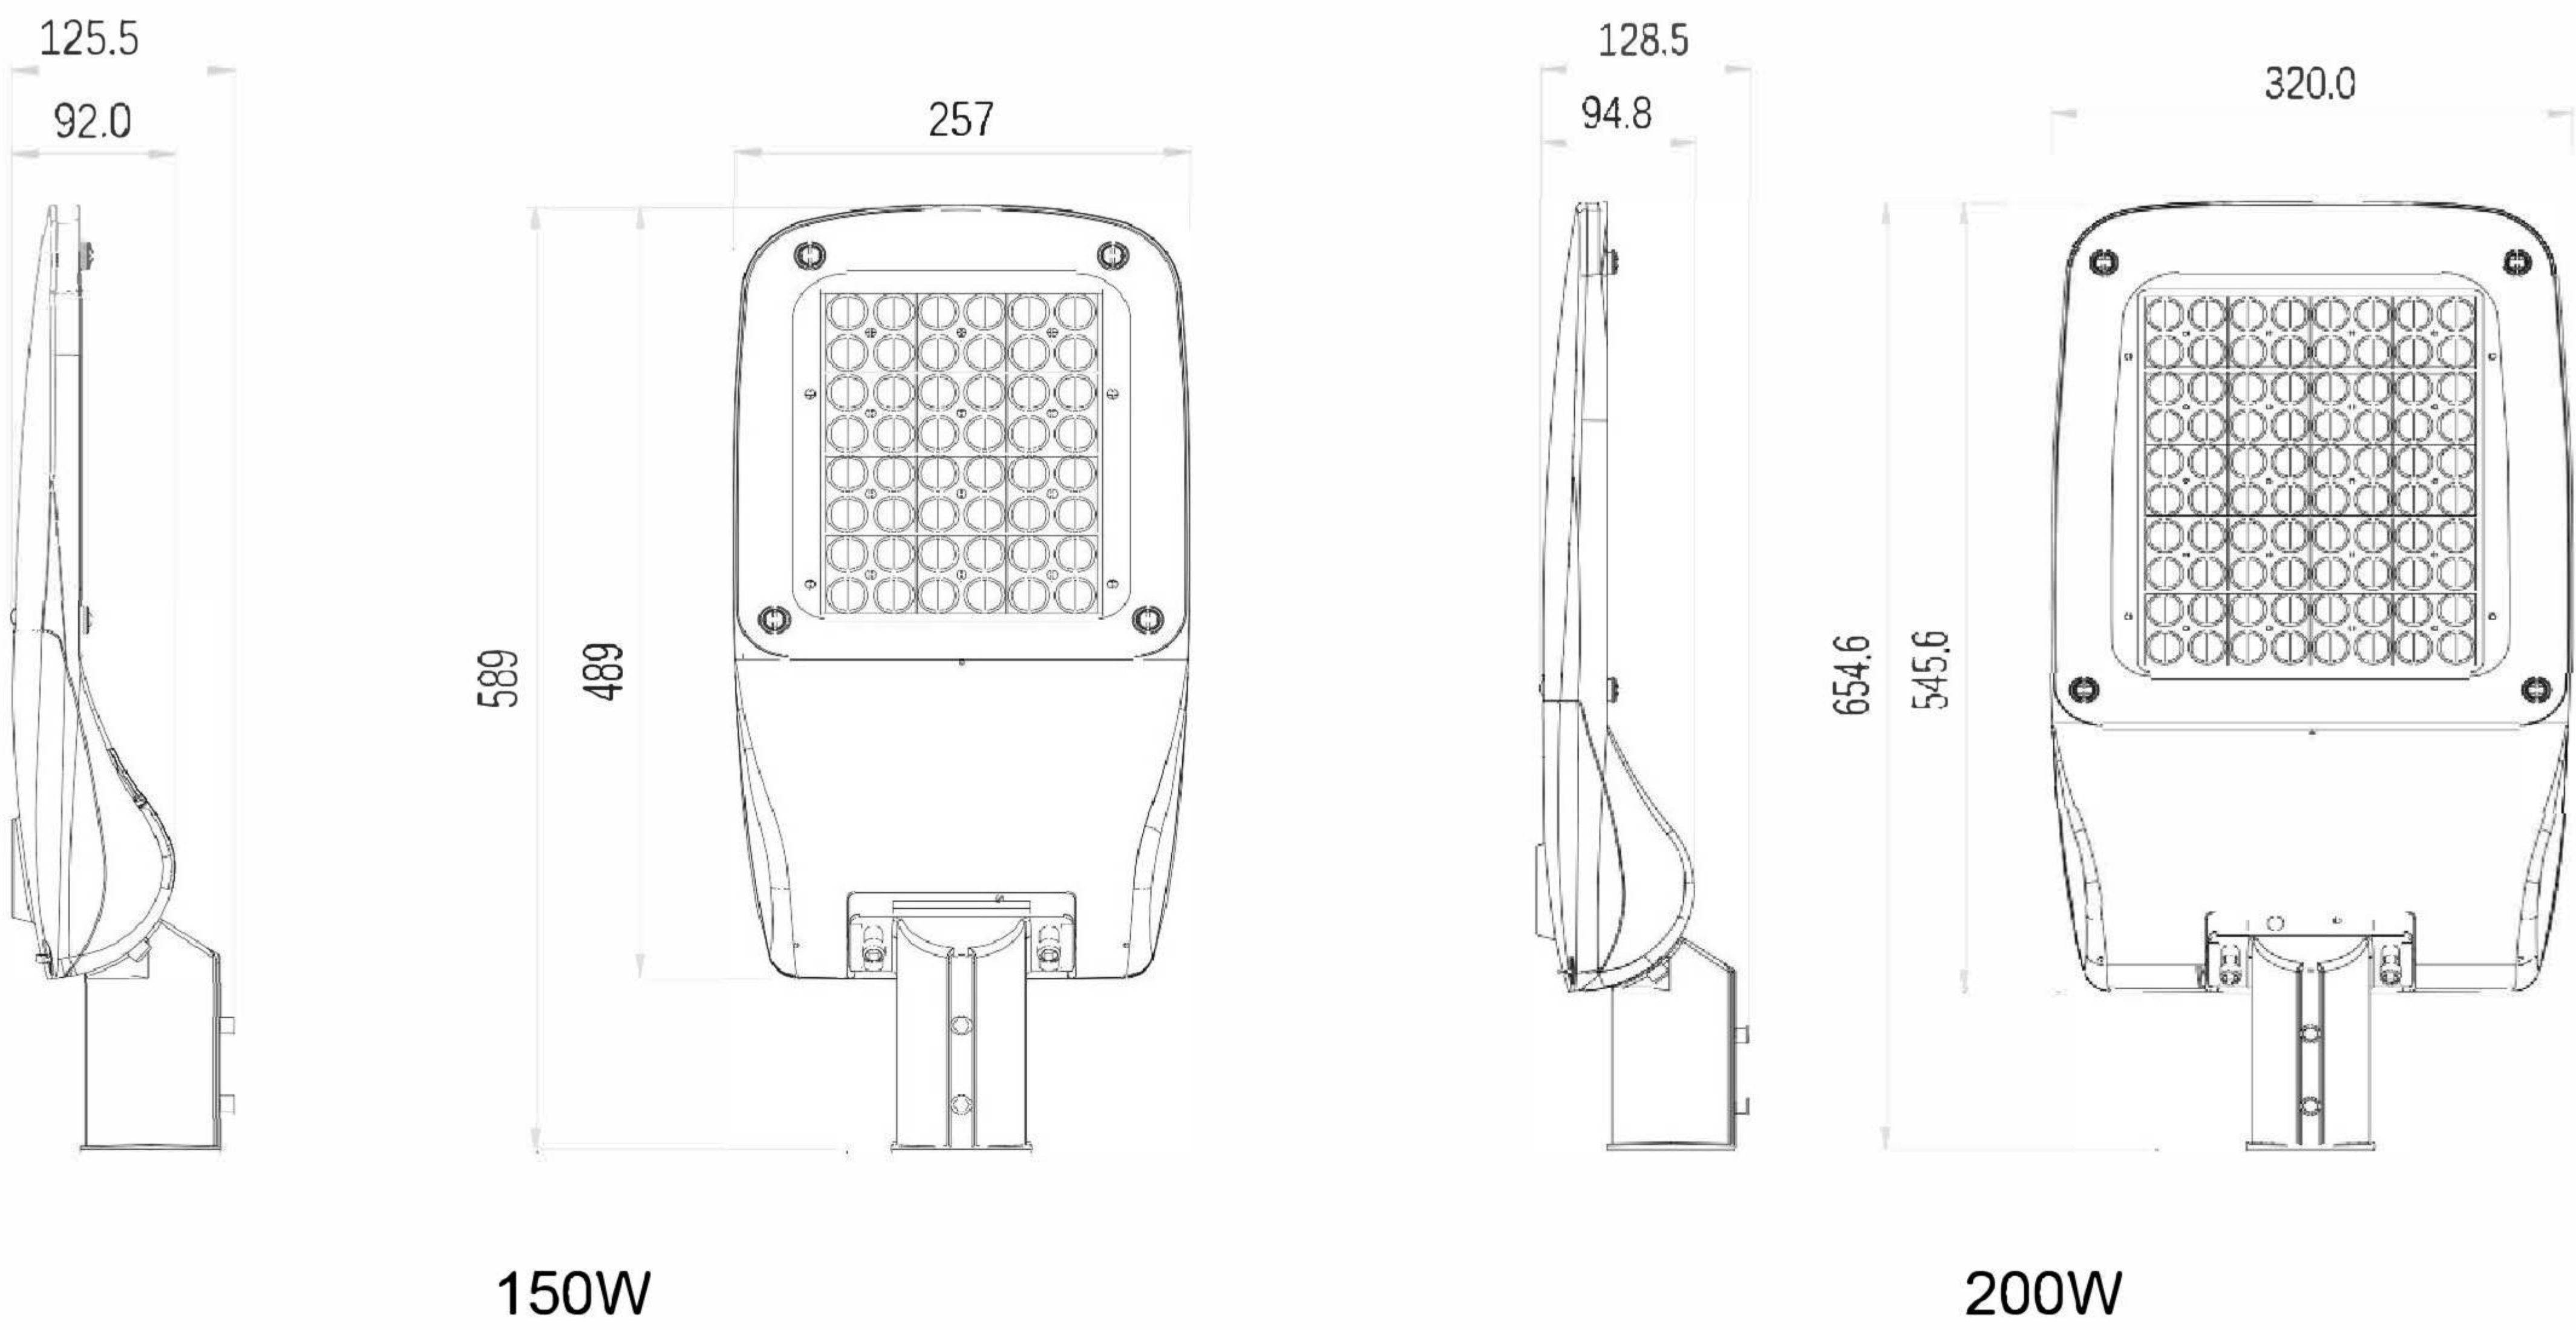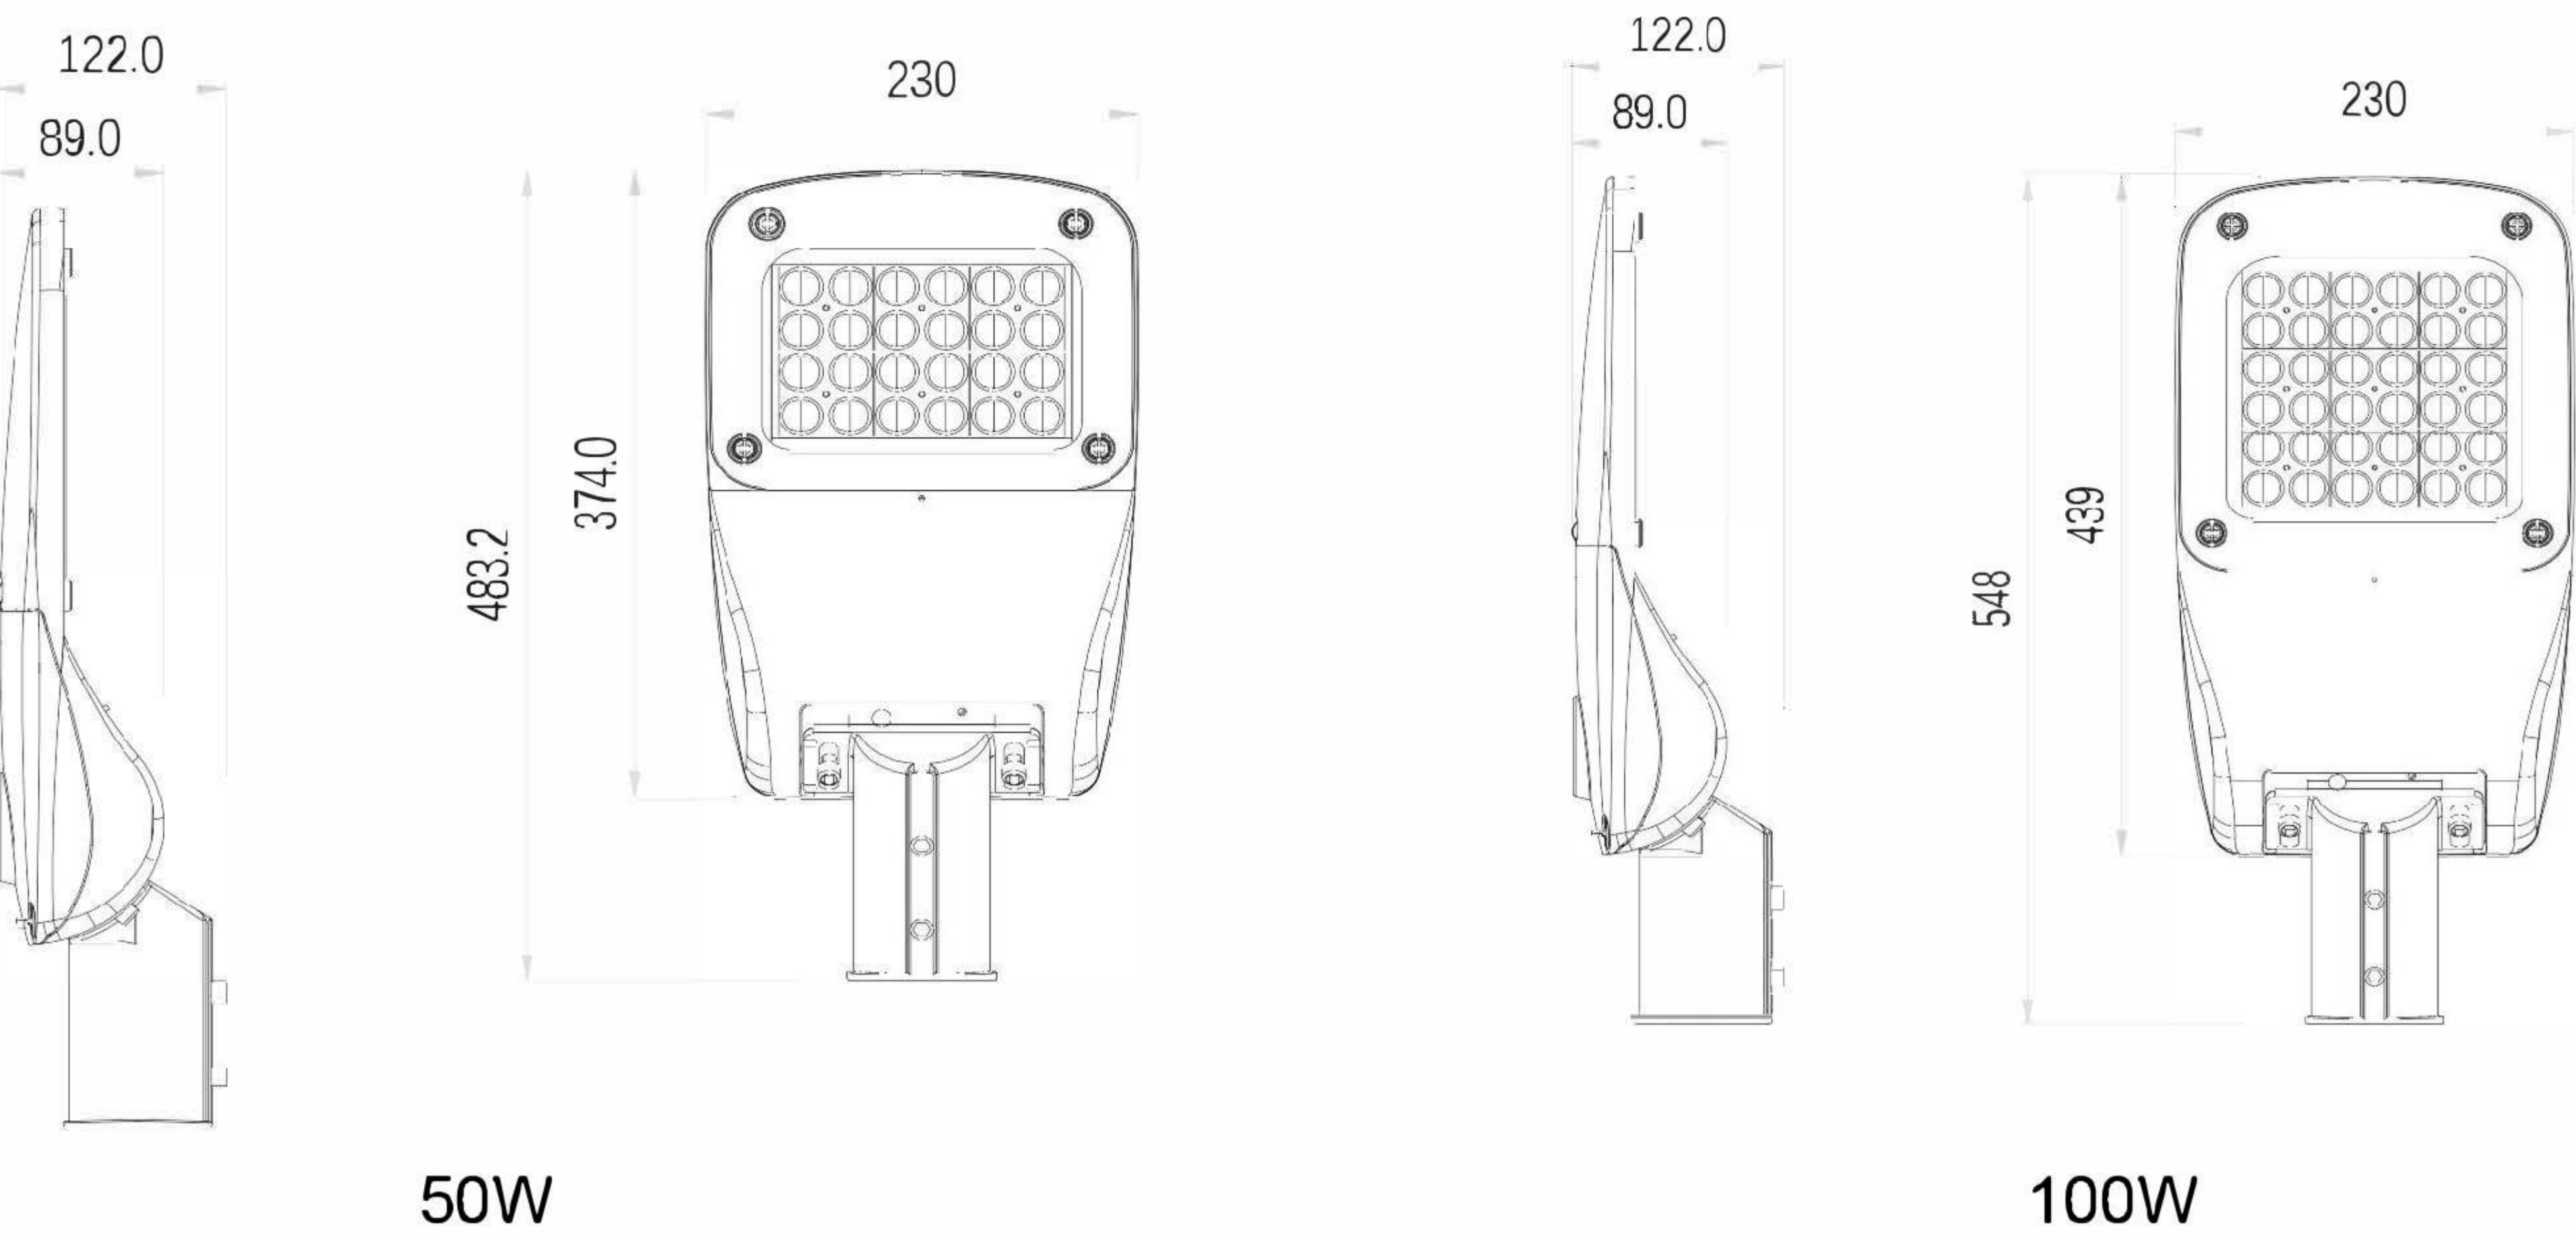

I ADDITIONAL ACCESSORY




MOTION SENSOR

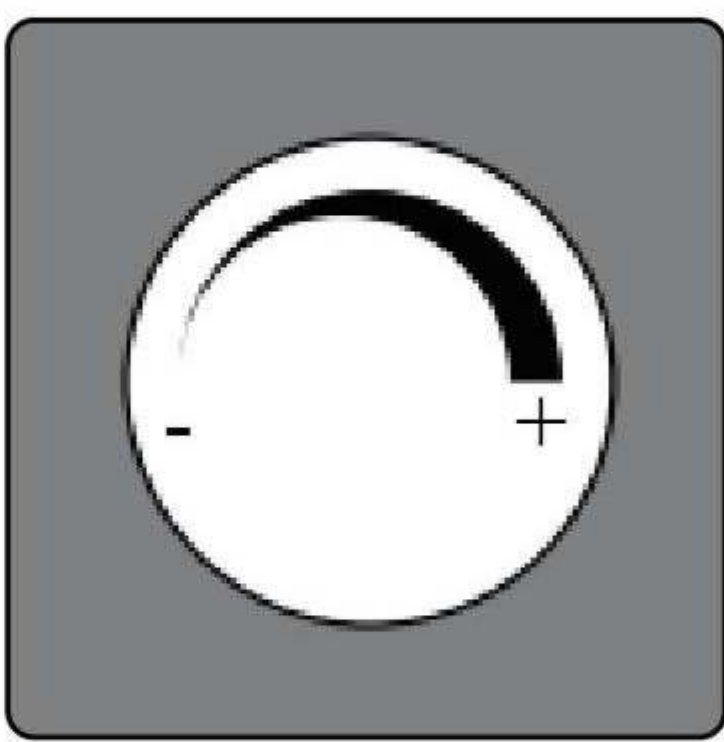

DIMMING

I LIGHTING DISTRIBUTION

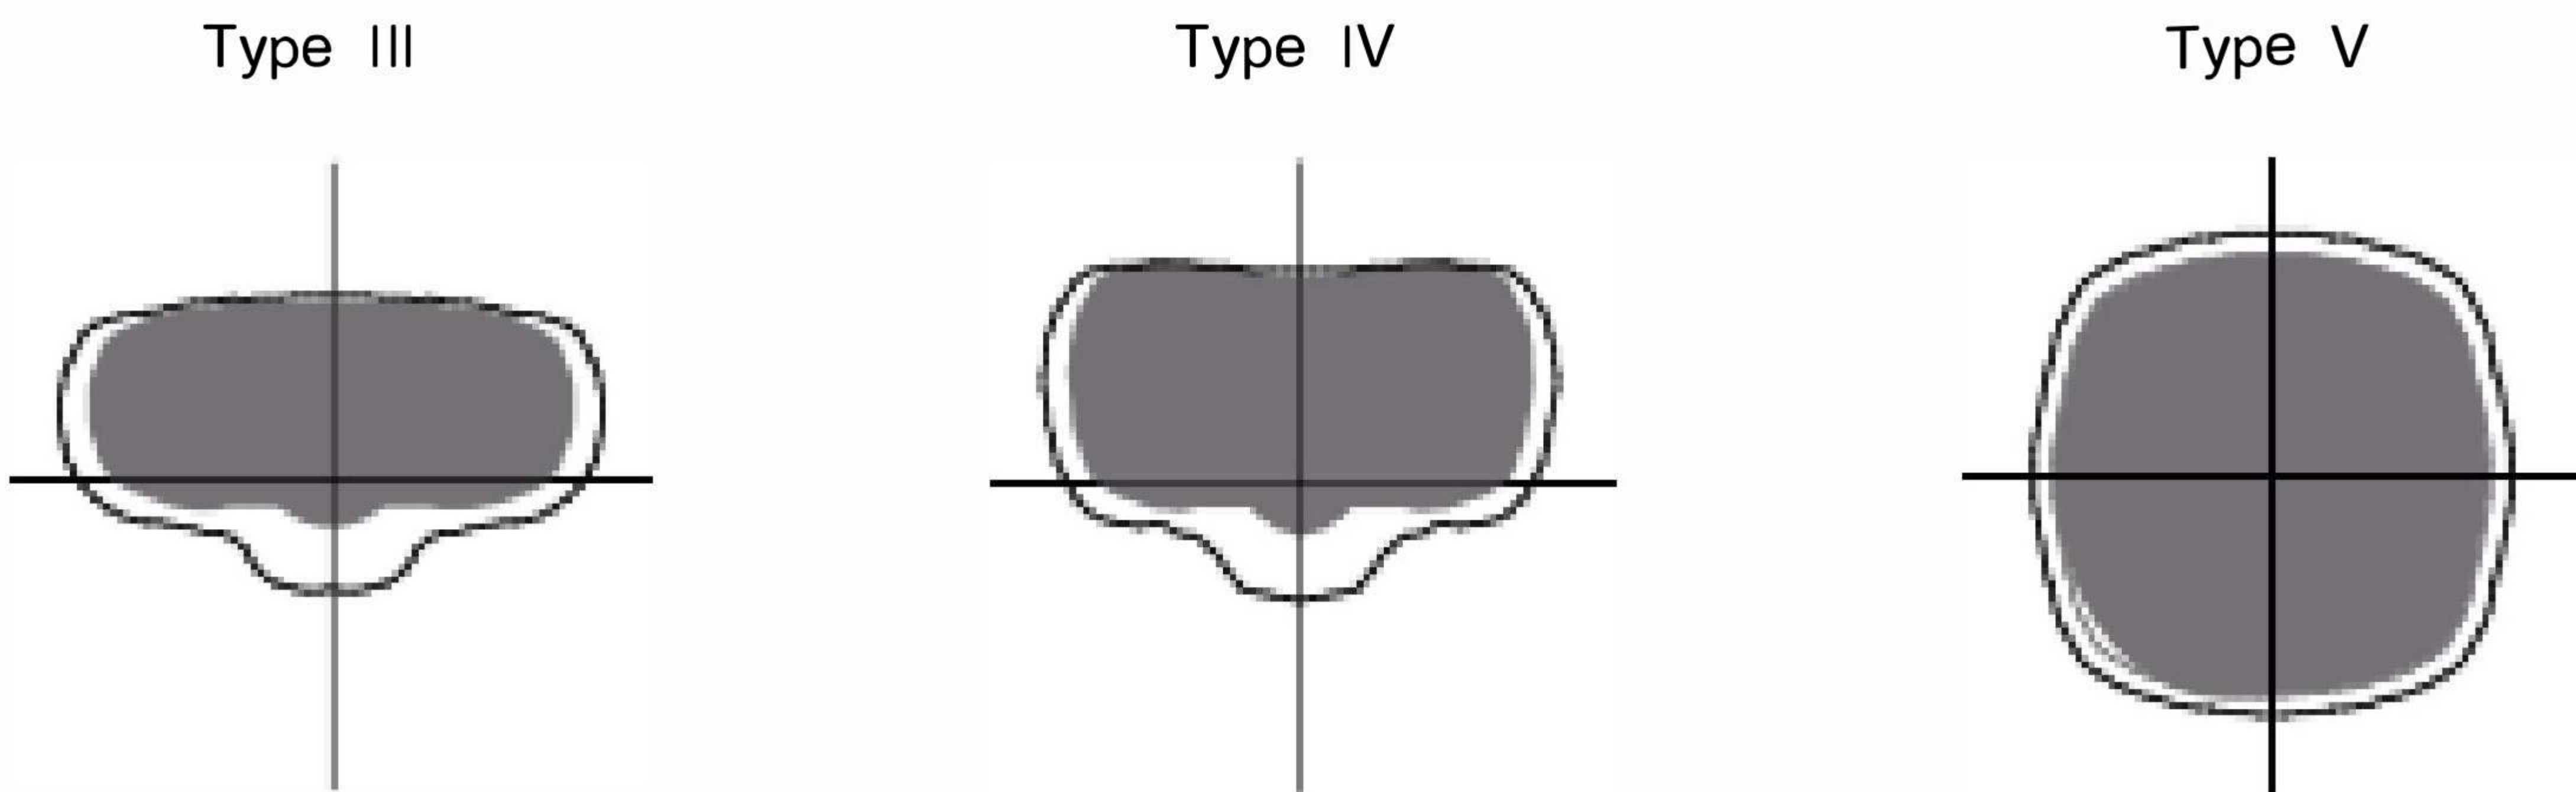

FLOOD LIGHT-FL35-15/26/50/80/100W



Key Features:


- Unique Design Aluminum Heat Sink
- Photocell Dusk to Dawn
- Multiple Brackets for Mounting
- Lumen Efficacy 130LM/W
- IP65 Wet Location
- Polycarbonate Optics for Average Lighting Distribution





I SPECIFICATION

Model No	Power	Voltage	CCT	CRI	Lumens
FL35-15W	15W	100-277V/347V	3000K,4000K,5000K,5700K	Ra>70	130lm/w
FL35-26W	26W	100-277V/347V	3000K,4000K,5000K,5700K	Ra>70	130lm/w
FL35-30W	30W	100-277V/347V	3000K,4000K,5000K,5700K	Ra>70	130lm/w
FL35-50W	50W	100-277V/347V	3000K,4000K,5000K,5700K	Ra>70	130lm/w
FL35-80W	80W	100-277V/347V	3000K,4000K,5000K,5700K	Ra>70	130lm/w
FL35-100W	100W	100-277V/347V	3000K,4000K,5000K,5700K	Ra>70	130lm/w
FL35-50W (Power and CCT selectable)	50W-40W-30W	100-277V	3000K,4000K,5000K,5700K	Ra>70	130lm/w
FL35-100W (Power and CCT selectable)	100W-75W-50W	100-277V	3000K,4000K,5000K,5700K	Ra>70	130lm/w



I DIMENSIONS

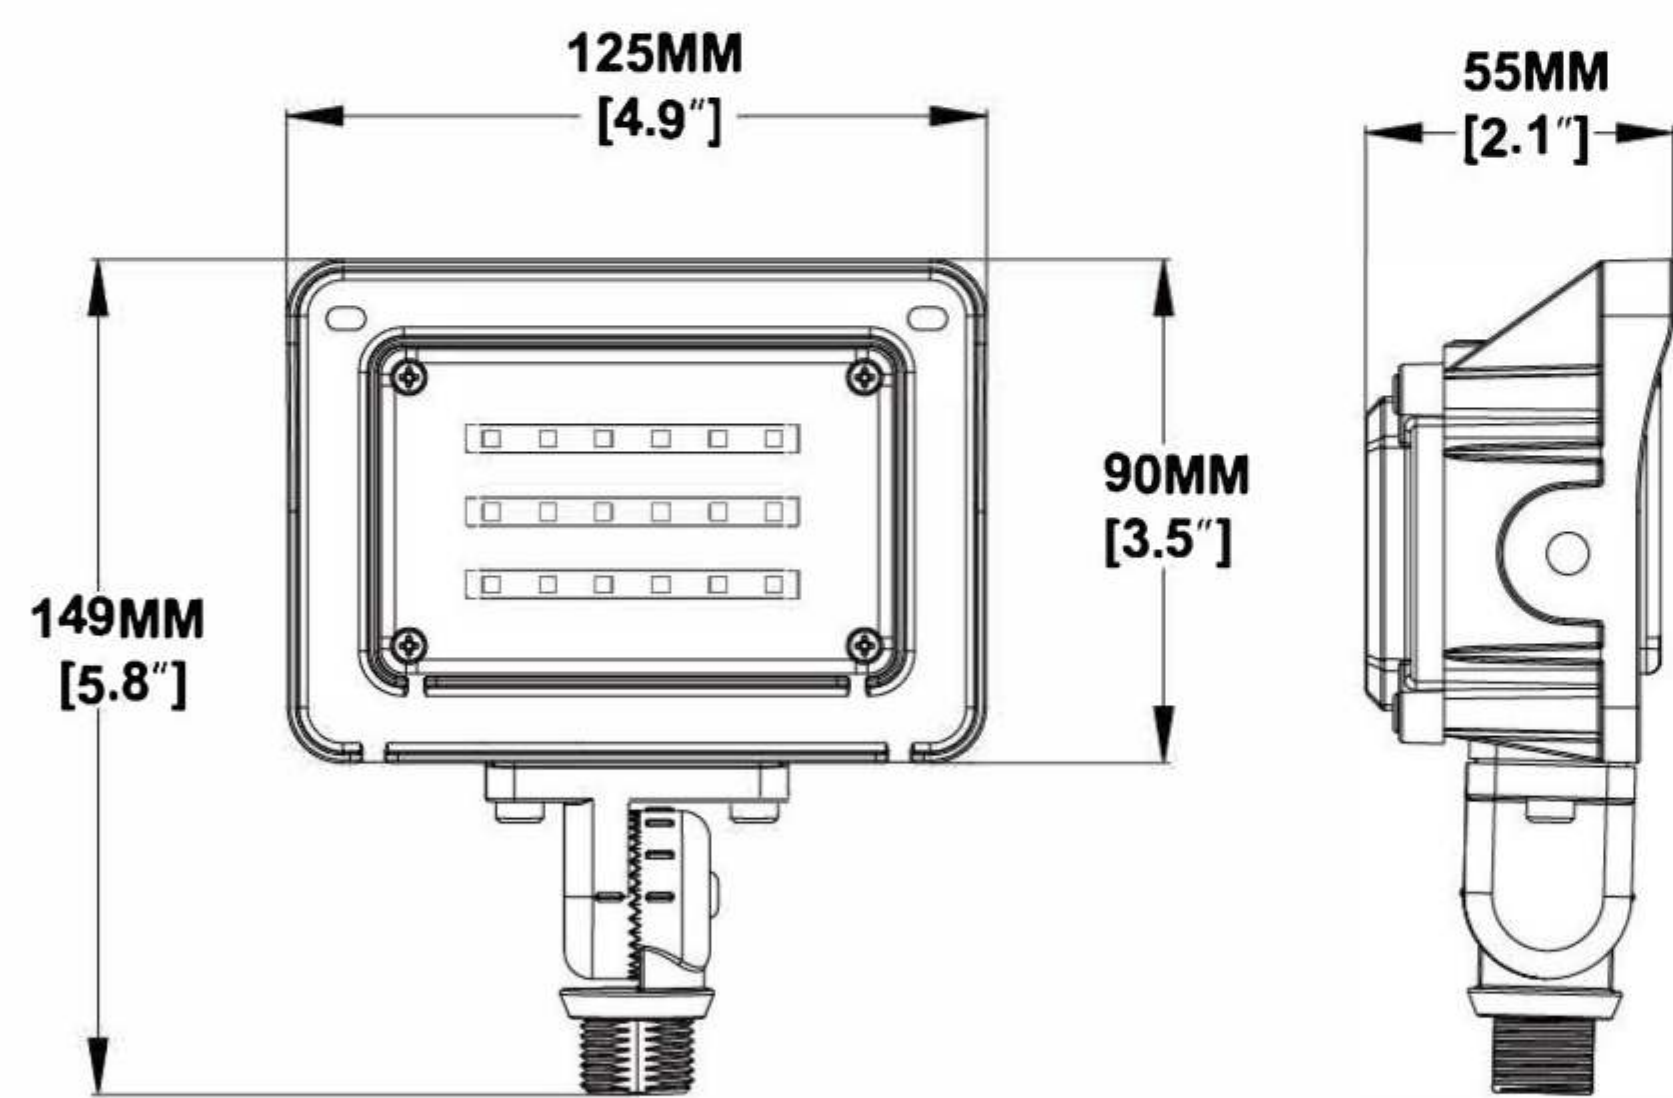


15W-26W

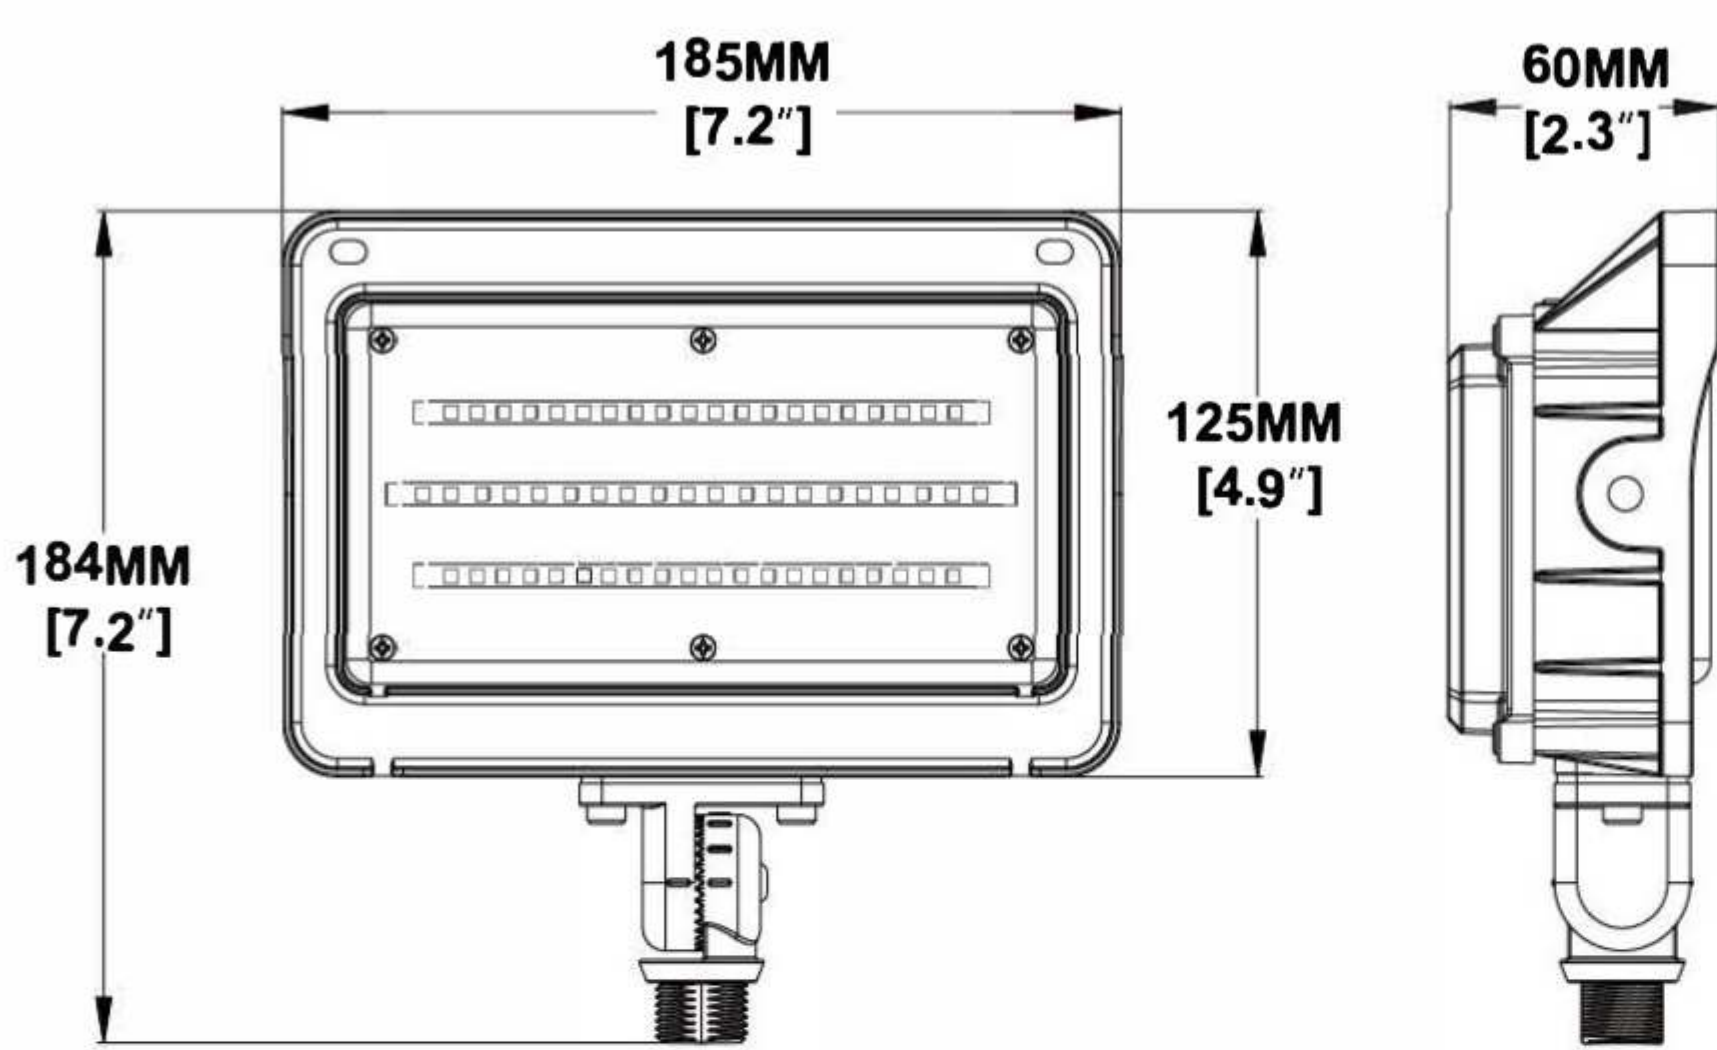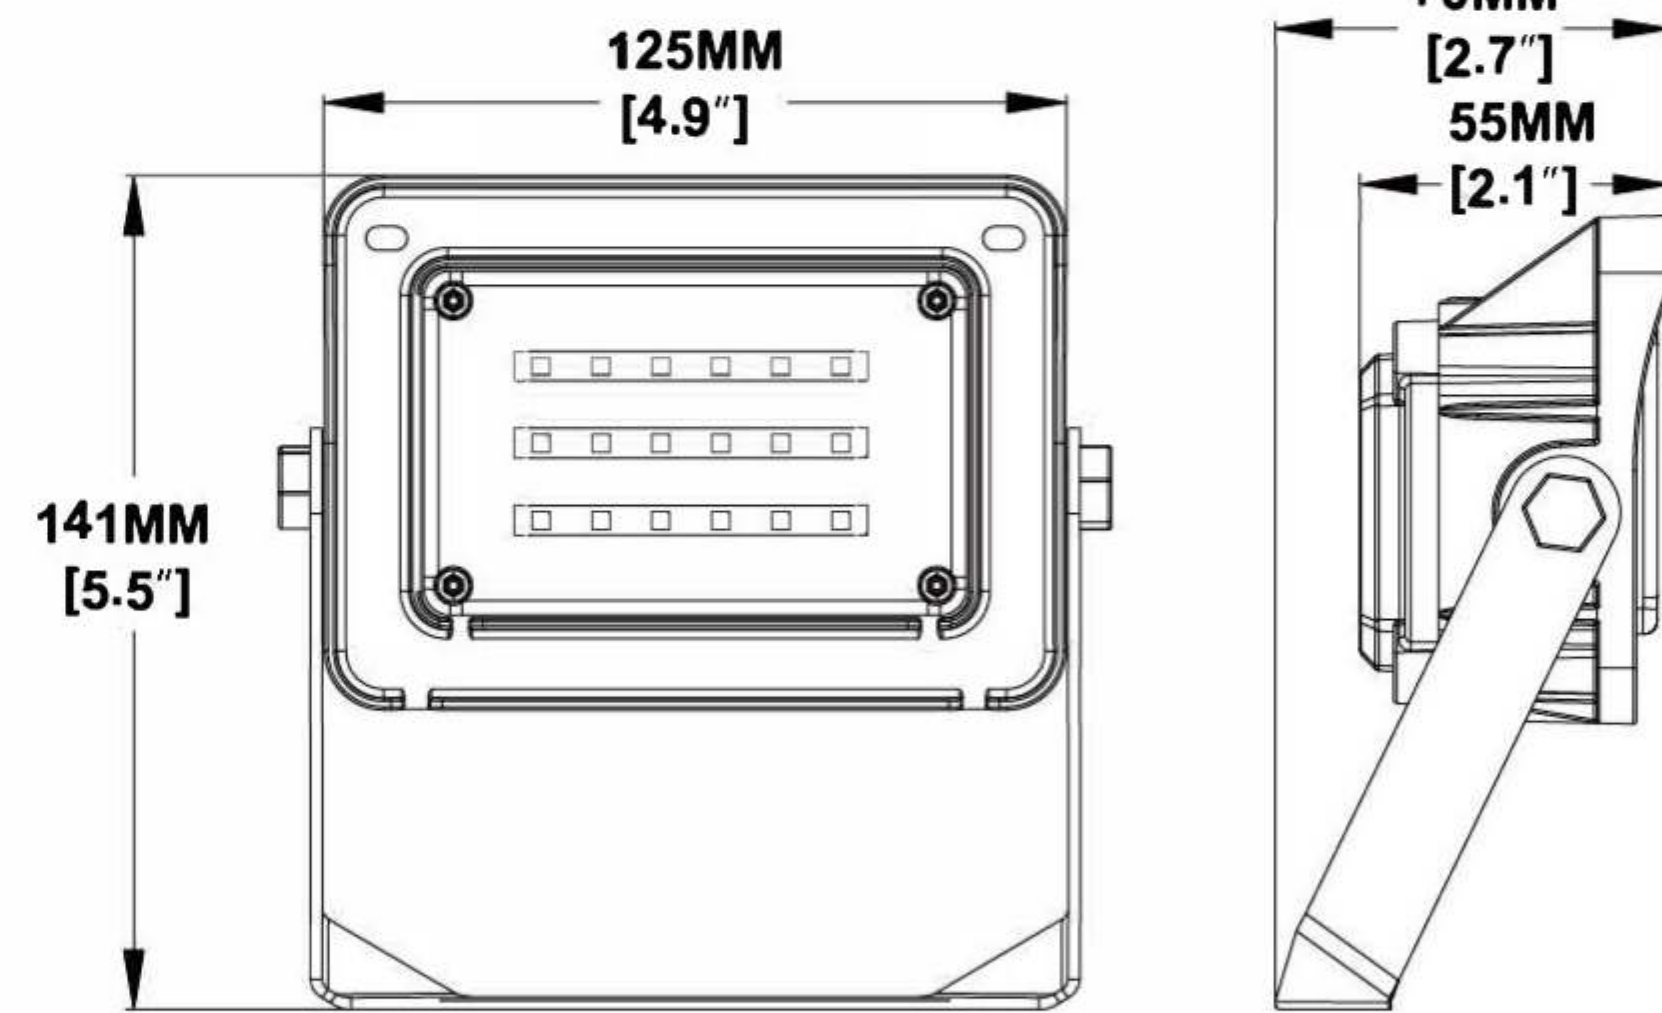

50W

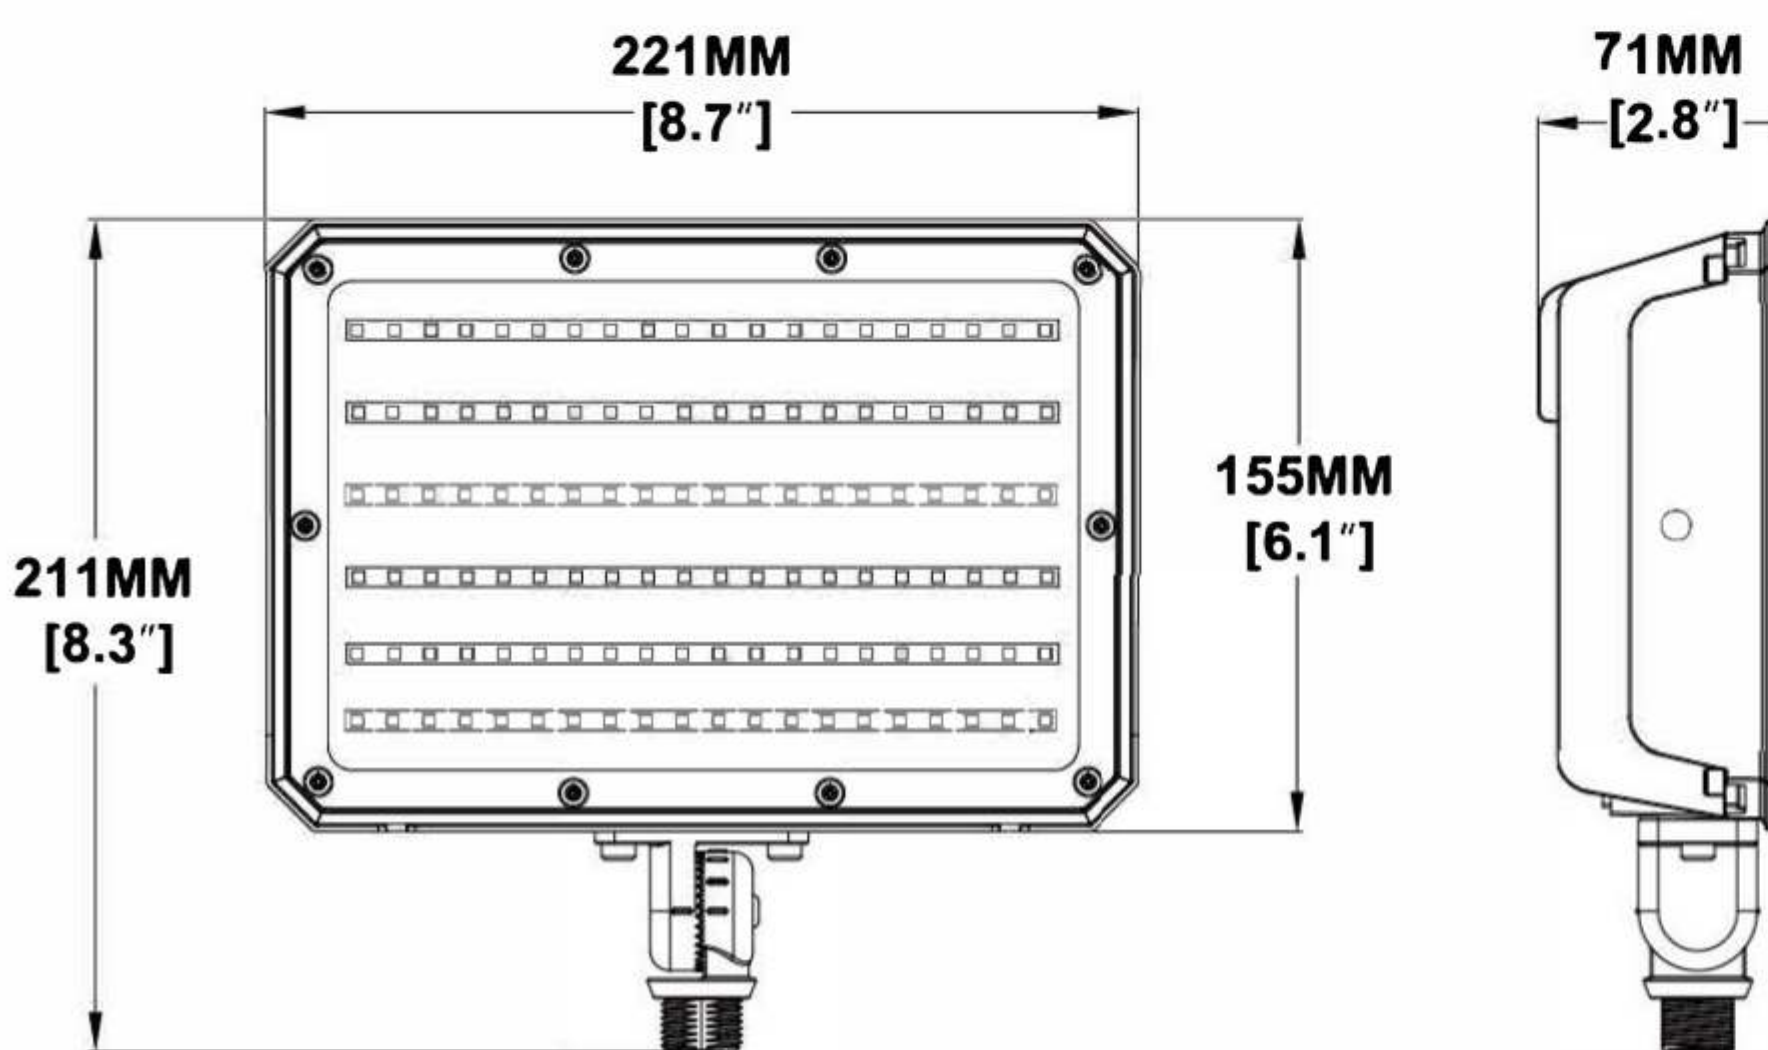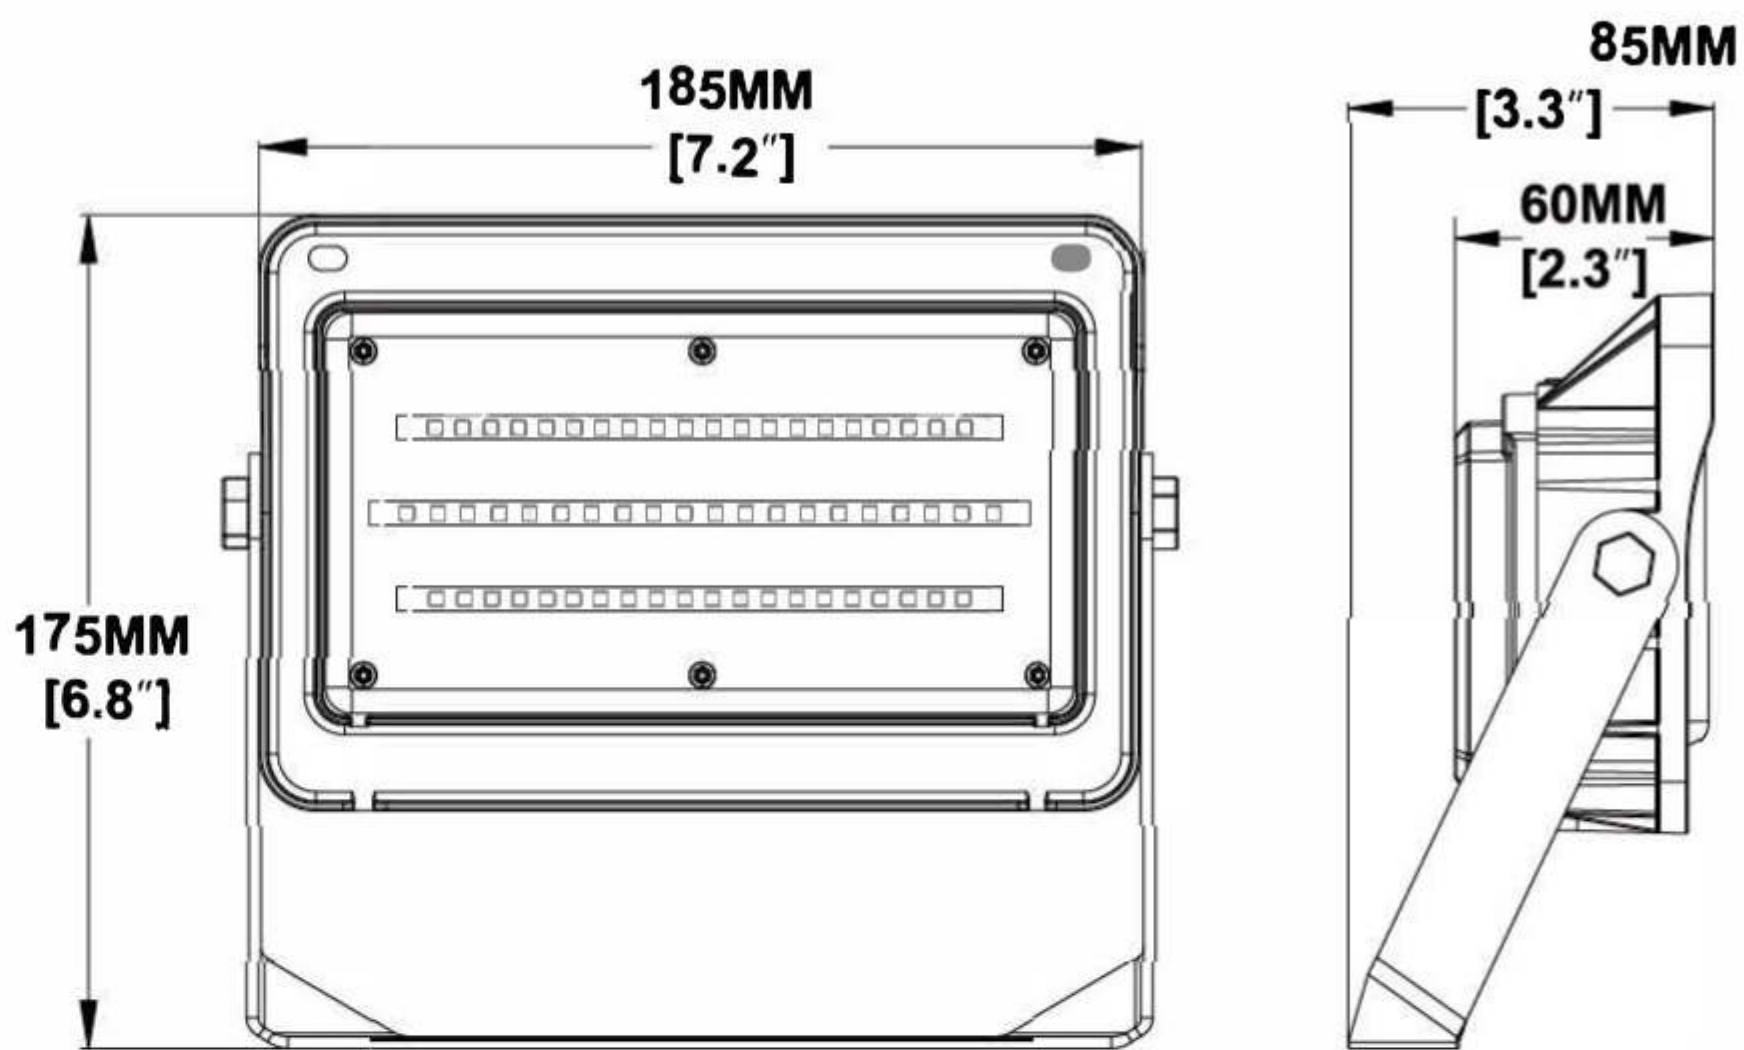

80W-100W

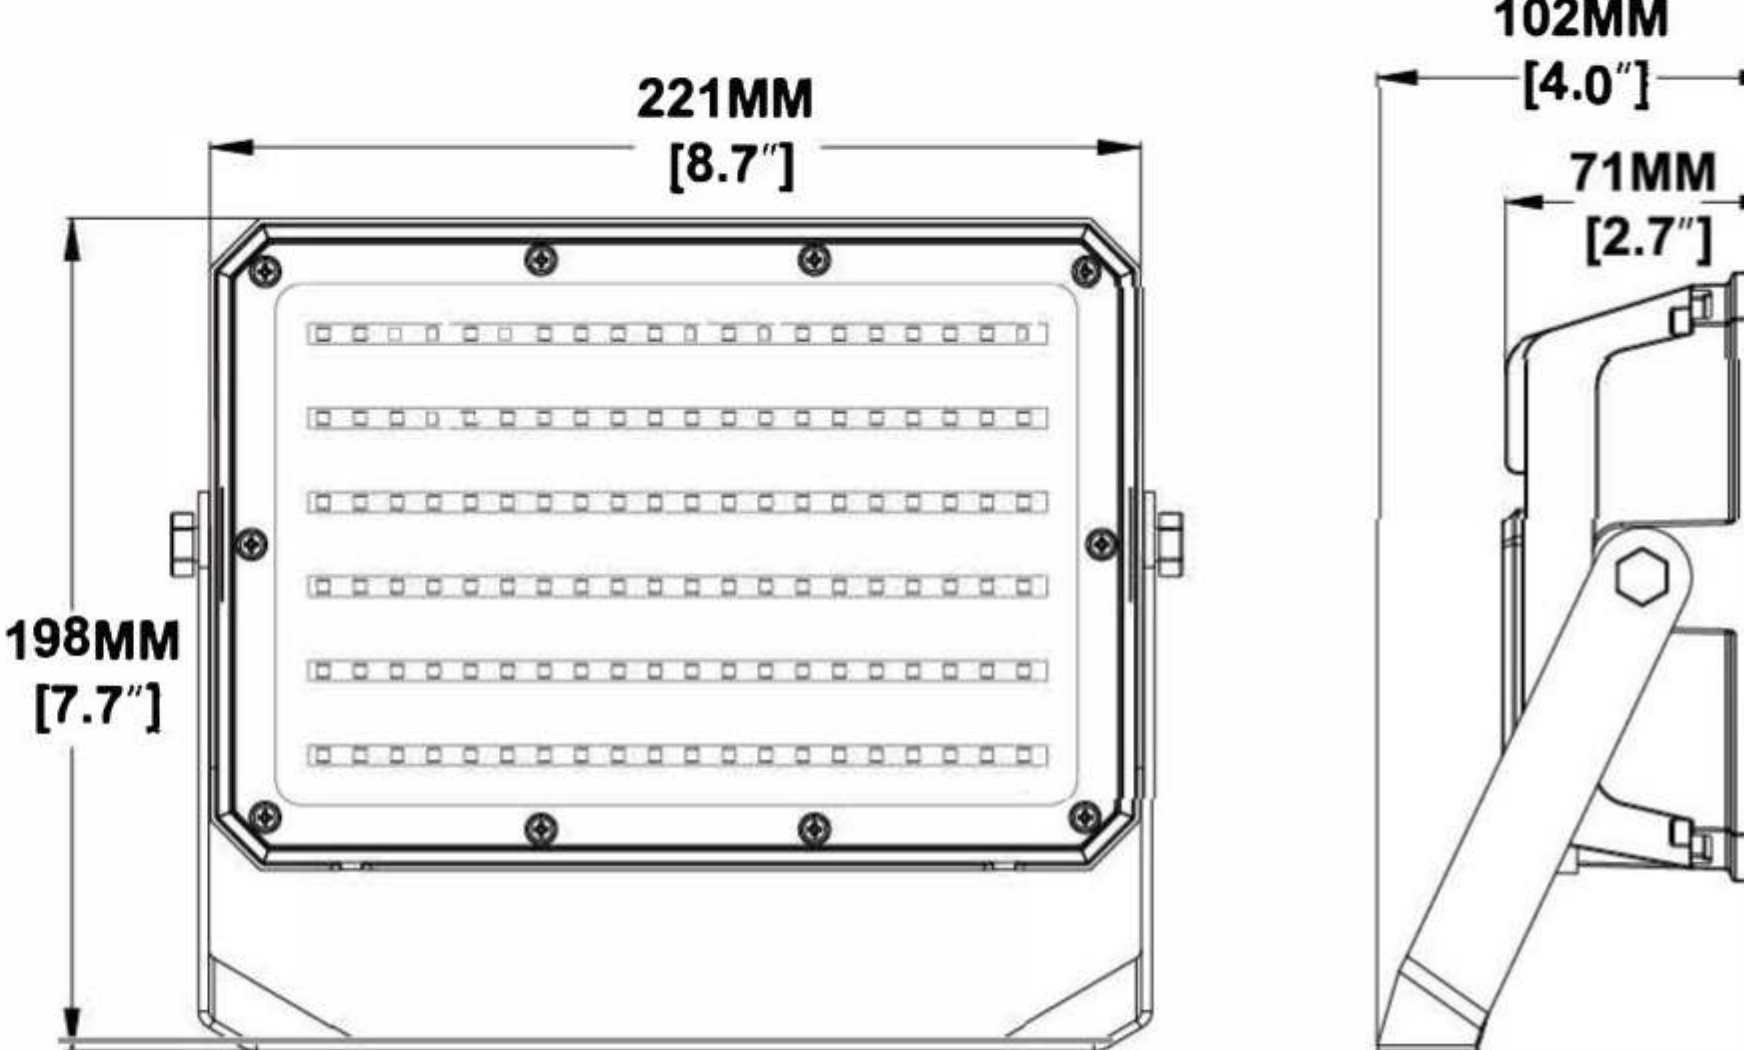

I ADDITIONAL ACCESSORY



PHOTOCELL



SHORTING CAP

I WATTAGE & CCT SELECTABLE

3power &3 CCT
Switchable for
choice



FLOOD LIGHT-150W/200W



Key Features:


- 130lm/w high efficiency for fixture
- North America Standard products
- Multiple mounting options
- DLC ETL CE RoHS
- Philips LED+5 years warranty



I SPECIFICATION

Model No	Power	Voltage	CCT	IP Rated	CRI	Lumens
ML-FL35-150W	150W	100-277VAC	3000K,4000K,5000K,5700K	IP65	Ra>70	130lm/w
ML-FL35-200W	200W	100-347VAC	3000K,4000K,5000K,5700K	IP65	Ra>70	130lm/w

I DIMENSIONS

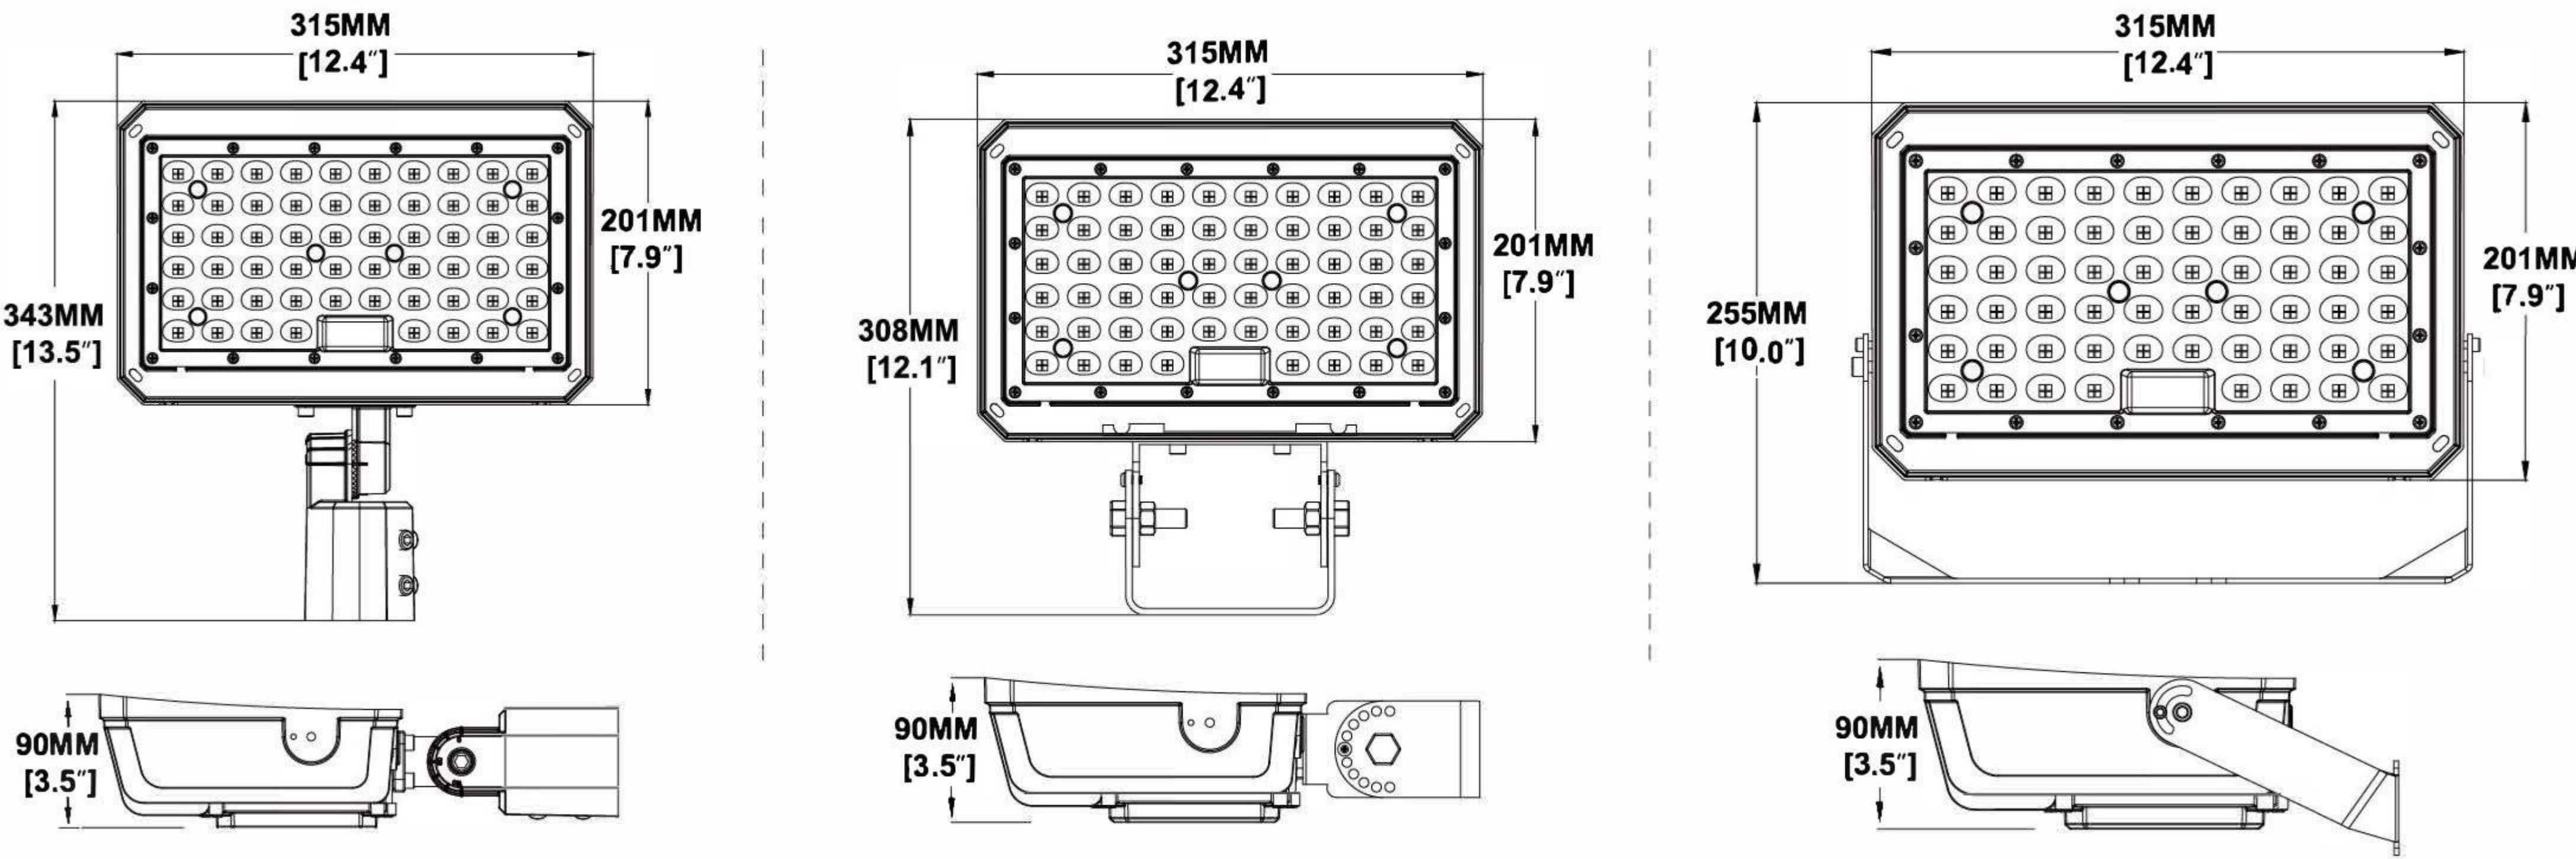

I ADDITIONAL ACCESSORY



PHOTOCELL



SHORTING CAP

I MOUNTOMG OPTIONAL



Trunnion Mount



Slip Fitter



Yoke Bracket

I USAGE SCENARIO



FLOOD LIGHT-50W/300W



Key Features:


- Unique Heavy Duty Die-cast Aluminum Housing
- CCT & Wattage Selectable for Easy Inventory Reserve
- Special Yoke Bracket for Easy Installation
- Type III,IV,V Lighting Distribution



I SPECIFICATION

Model No	Power	Voltage	CCT	CRI	Lumens
PLC-150W-S	75W-100W-150W Settable	100-277V/347V	3000K,4000K,5000K Settable	Ra>70	160lm/w
PLC-240W-S	150W-200W-240W Settable	100-277V/347V	3000K,4000K,5000K Settable	Ra>70	160lm/w
PLC-300W-S	200W-240W-300W Settable	100-277V/347V	3000K,4000K,5000K Settable	Ra>70	160lm/w
PLC-50W	50W	100-277V/347V/480V	3000K,4000K,5000K,6000K	Ra>70	160lm/w
PLC-75W	75W	100-277V/347V/480V	3000K,4000K,5000K,6000K	Ra>70	160lm/w
PLC-100W	100W	100-277V/347V/480V	3000K,4000K,5000K,6000K	Ra>70	160lm/w
PLC-150W	150W	100-277V/347V/480V	3000K,4000K,5000K,6000K	Ra>70	160lm/w
PLC-200W	200W	100-277V/347V/480V	3000K,4000K,5000K,6000K	Ra>70	160lm/w
PLC-240W	240W	100-277V/347V/480V	3000K,4000K,5000K,6000K	Ra>70	160lm/w
PLC-300W	300W	100-277V/347V/480V	3000K,4000K,5000K,6000K	Ra>70	160lm/w

I DIMENSIONS

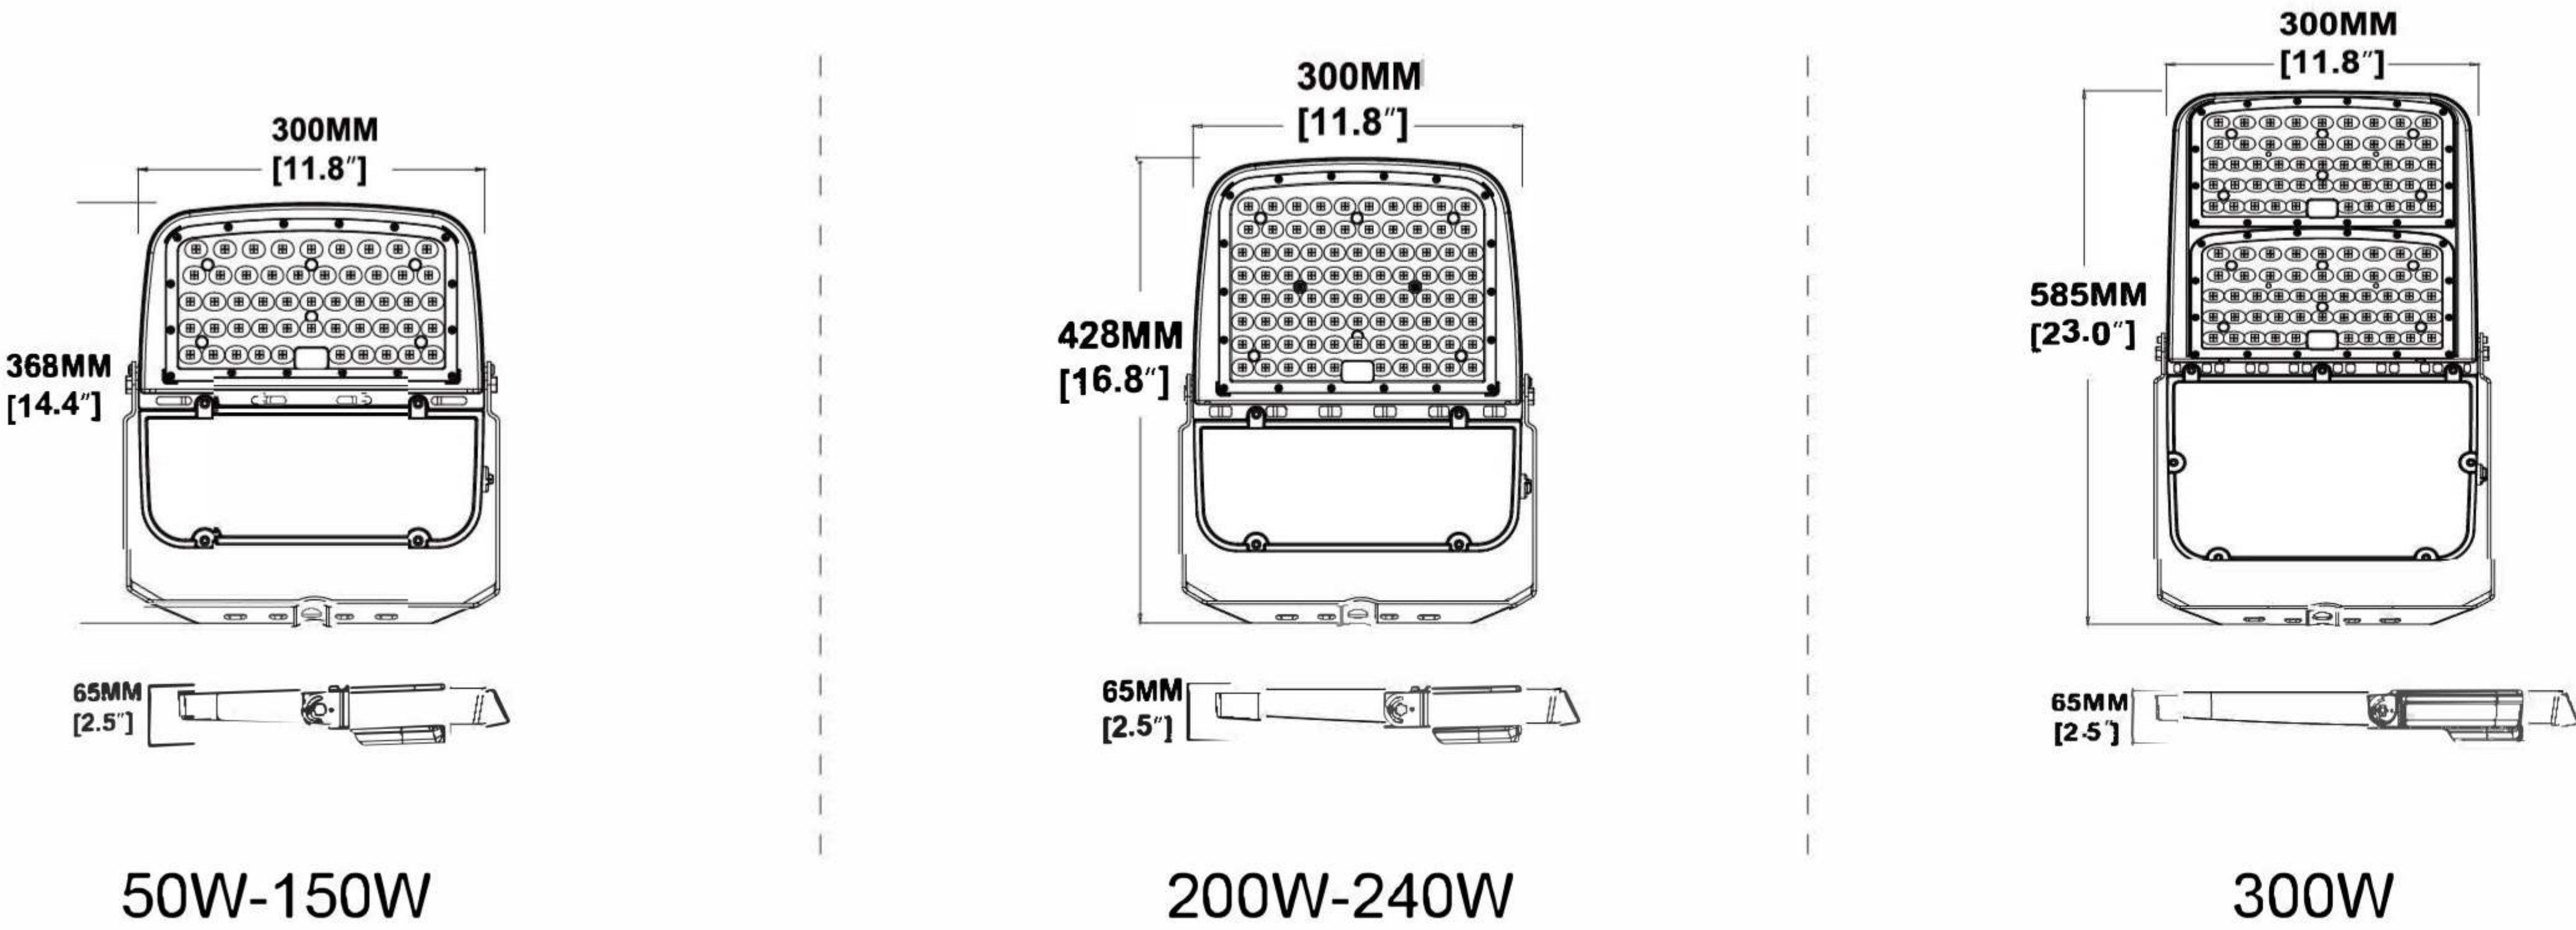


I ADDITIONAL ACCESSORY



Photocell




Motion Sensor

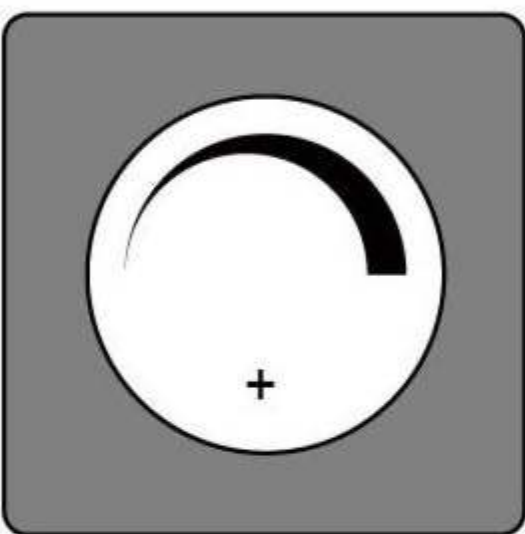

Dimming

I LIGHT DISTRIBUTION

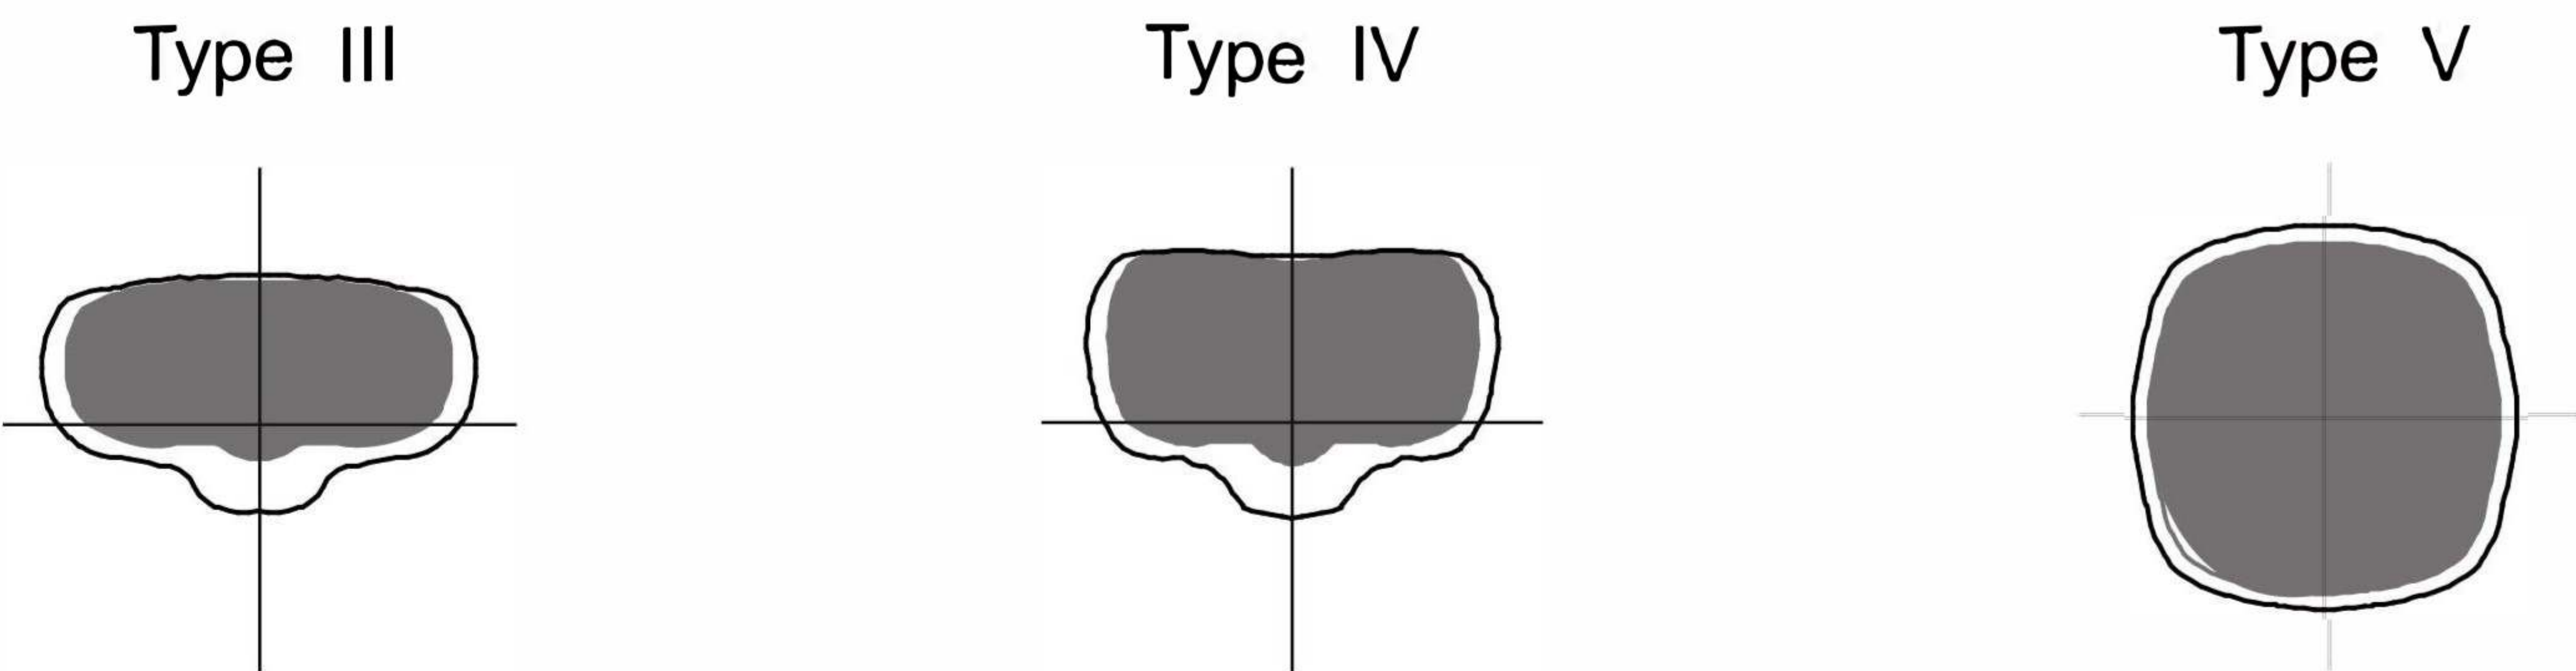

I WATTAGE & CCT SELECTABLE



FLOOD LIGHT / FLG 50-500W



Key Features:



- High performace LED fixture 180lm/w
- Tempered glass cover, no yellowing
- Die cast aluminum housing,Good heat dissipation
- 5-Years warranty
- DLC ETL listed



I SPECIFICATION

Model No	Power	Voltage	CCT	CRI	Lumens
FLG-50W	50W	100-277/347VAC	3000K,4000K,5000K,5700K	RA>70	180LM/W
FLG-80W	80W	100-277/347VAC	3000K,4000K,5000K,5700K	RA>70	180LM/W
FLG-100W	100W	100-277/347VAC	3000K,4000K,5000K,5700K	RA>70	180LM/W
FLG-150W	150W	100-277/347VAC	3000K,4000K,5000K,5700K	RA>70	180LM/W
FLG-200W	200W	100-277/347VAC	3000K,4000K,5000K,5700K	RA>70	180LM/W
FLG-300W	300W	100-277/347VAC	3000K,4000K,5000K,5700K	RA>70	180LM/W
FLG-500W	500W	100-277/347VAC	3000K,4000K,5000K,5700K	RA>70	180LM/W

I DIMENSIONS

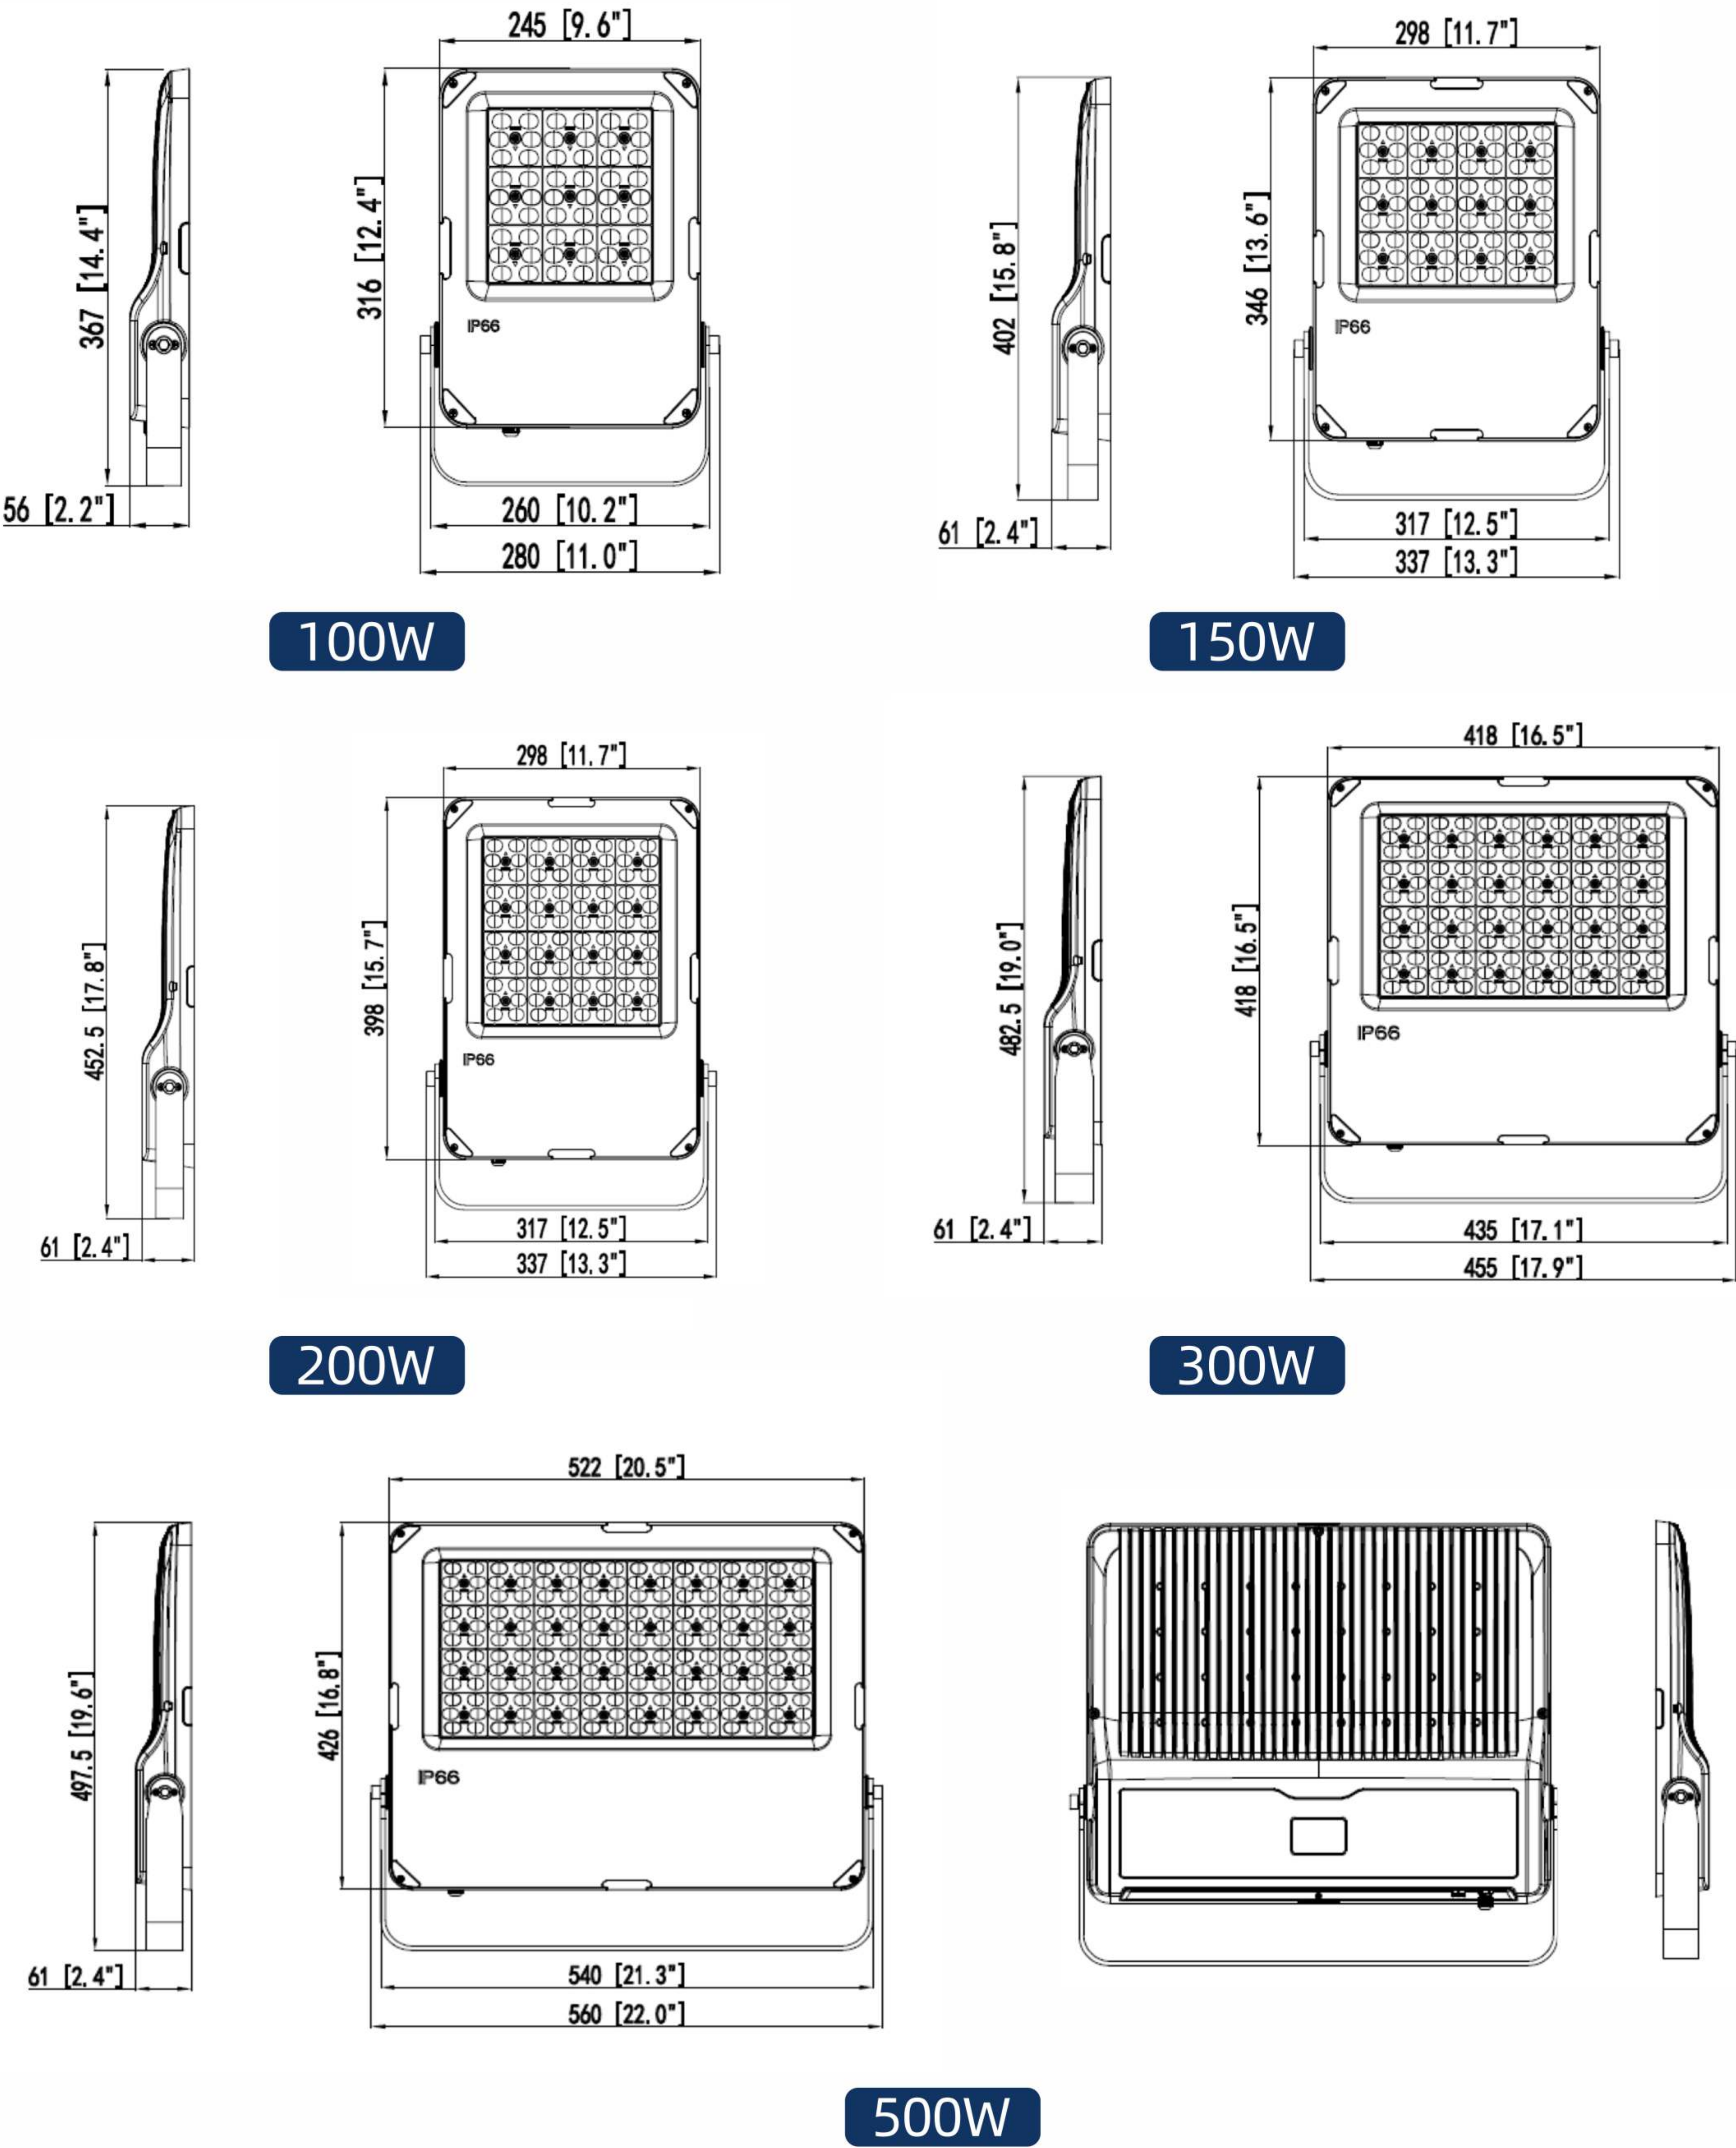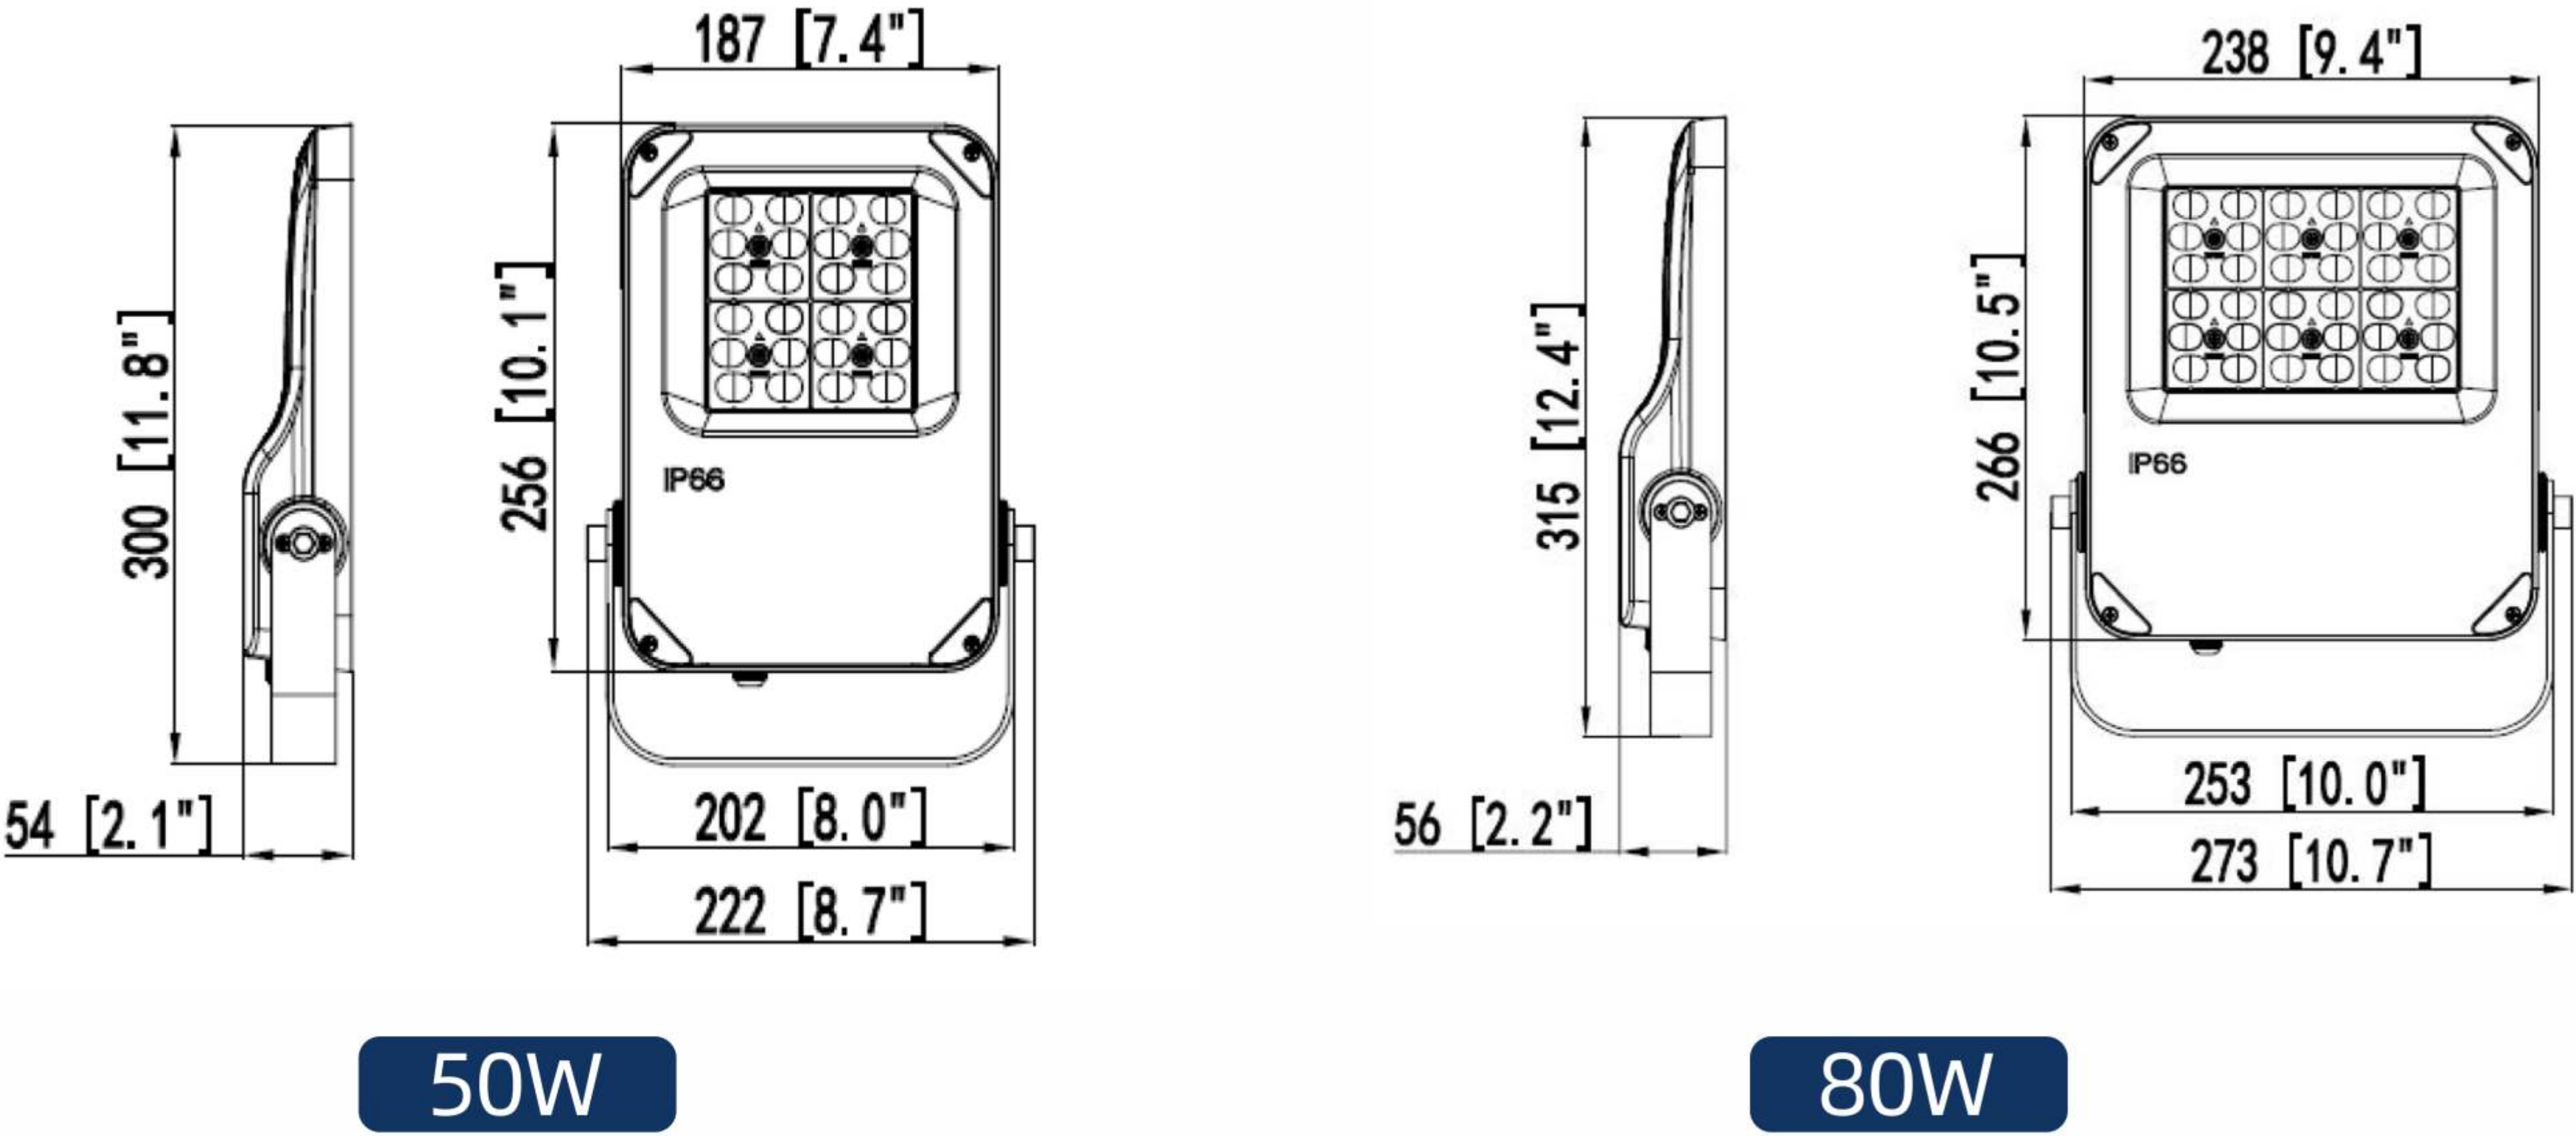

Air Pressure balance in and out of the luminaire



Discharge water mist

PARKING LOT LIGHT-150W-300W

Key Features:


- Unique Heavy Duty Die-cast Aluminum Housing
- CCT & Wattage Selectable for Easy Inventory Reserve
- Special Yoke Bracket for Easy Installation
- Type III,IV,V Lighting Distribution



I SPECIFICATION

Model No	Power	Voltage	CCT	CRI	Lumens
PLD-150W-S	75W 100W-150W Settable	100-277V/347V	3000K 4000K-5000K Settable	Ra>70	180lm/w
PLD-240W-S	150W-200W 240W Settable	100-277V/347V	3000K 4000K-5000K Settable	Ra>70	180lm/w
PLD-300W-S	200W-240W-300W Settable	100-277V/347V	3000K-4000K-5000K Settable	Ra>70	180lm/w
PLD-150W	150W	100-277V/347V/480V	3000K,4000K,5000K,6000K	Ra>70	180lm/w
PLD-200W	200W	100-277V/347V/480V	3000K,4000K,5000K,6000K	Ra>70	180lm/w
PLD-240W	240W	100-277V/347V/480V	3000K,4000K,5000K,6000K	Ra>70	180lm/w
PLD-300W	300W	100-277V/347V/480V	3000K,4000K,5000K,6000K	Ra>70	180lm/w

I DIMENSIONS

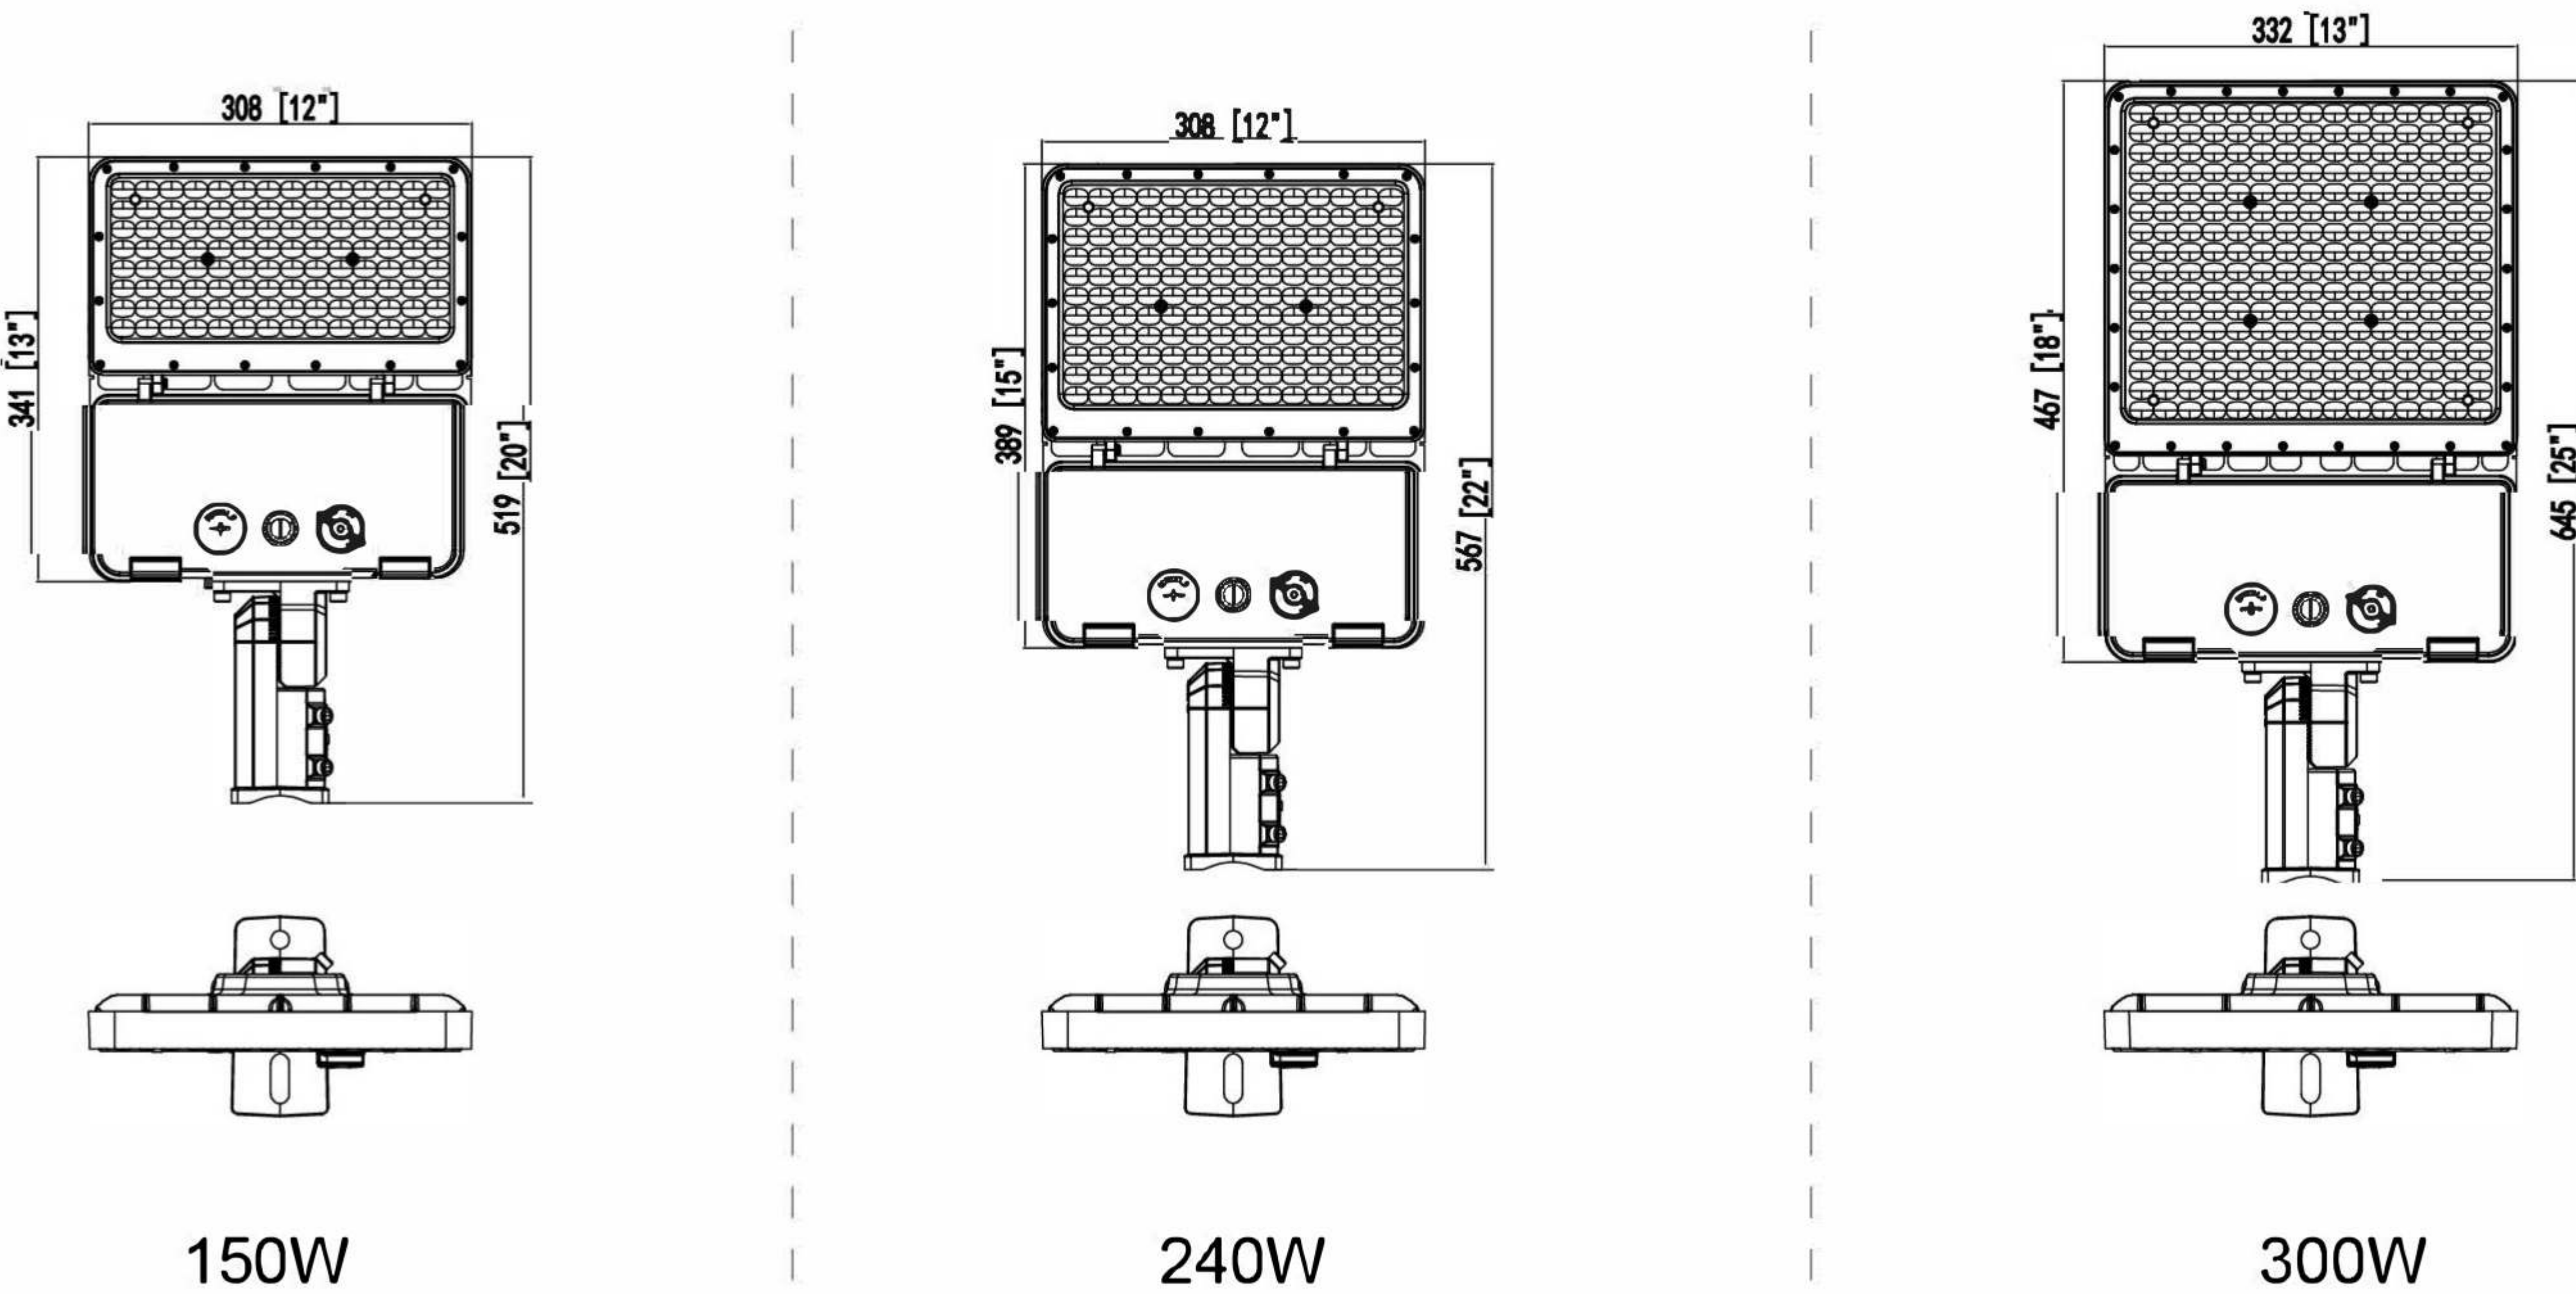


I ADDITIONAL ACCESSORY



Photocell



Motion Sensor

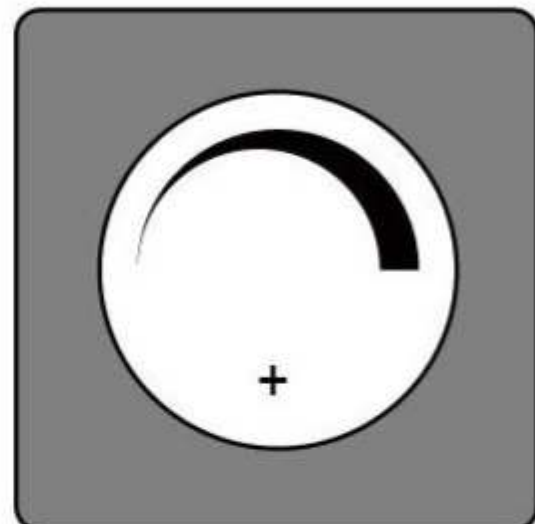

Dimming

I MULTIPLE BRACKETS



Slip Fitter



Trunnion




Yoke



Adjustable Arm for
Square / Round Pole

I WATTAGE & CCT SELECTABLE

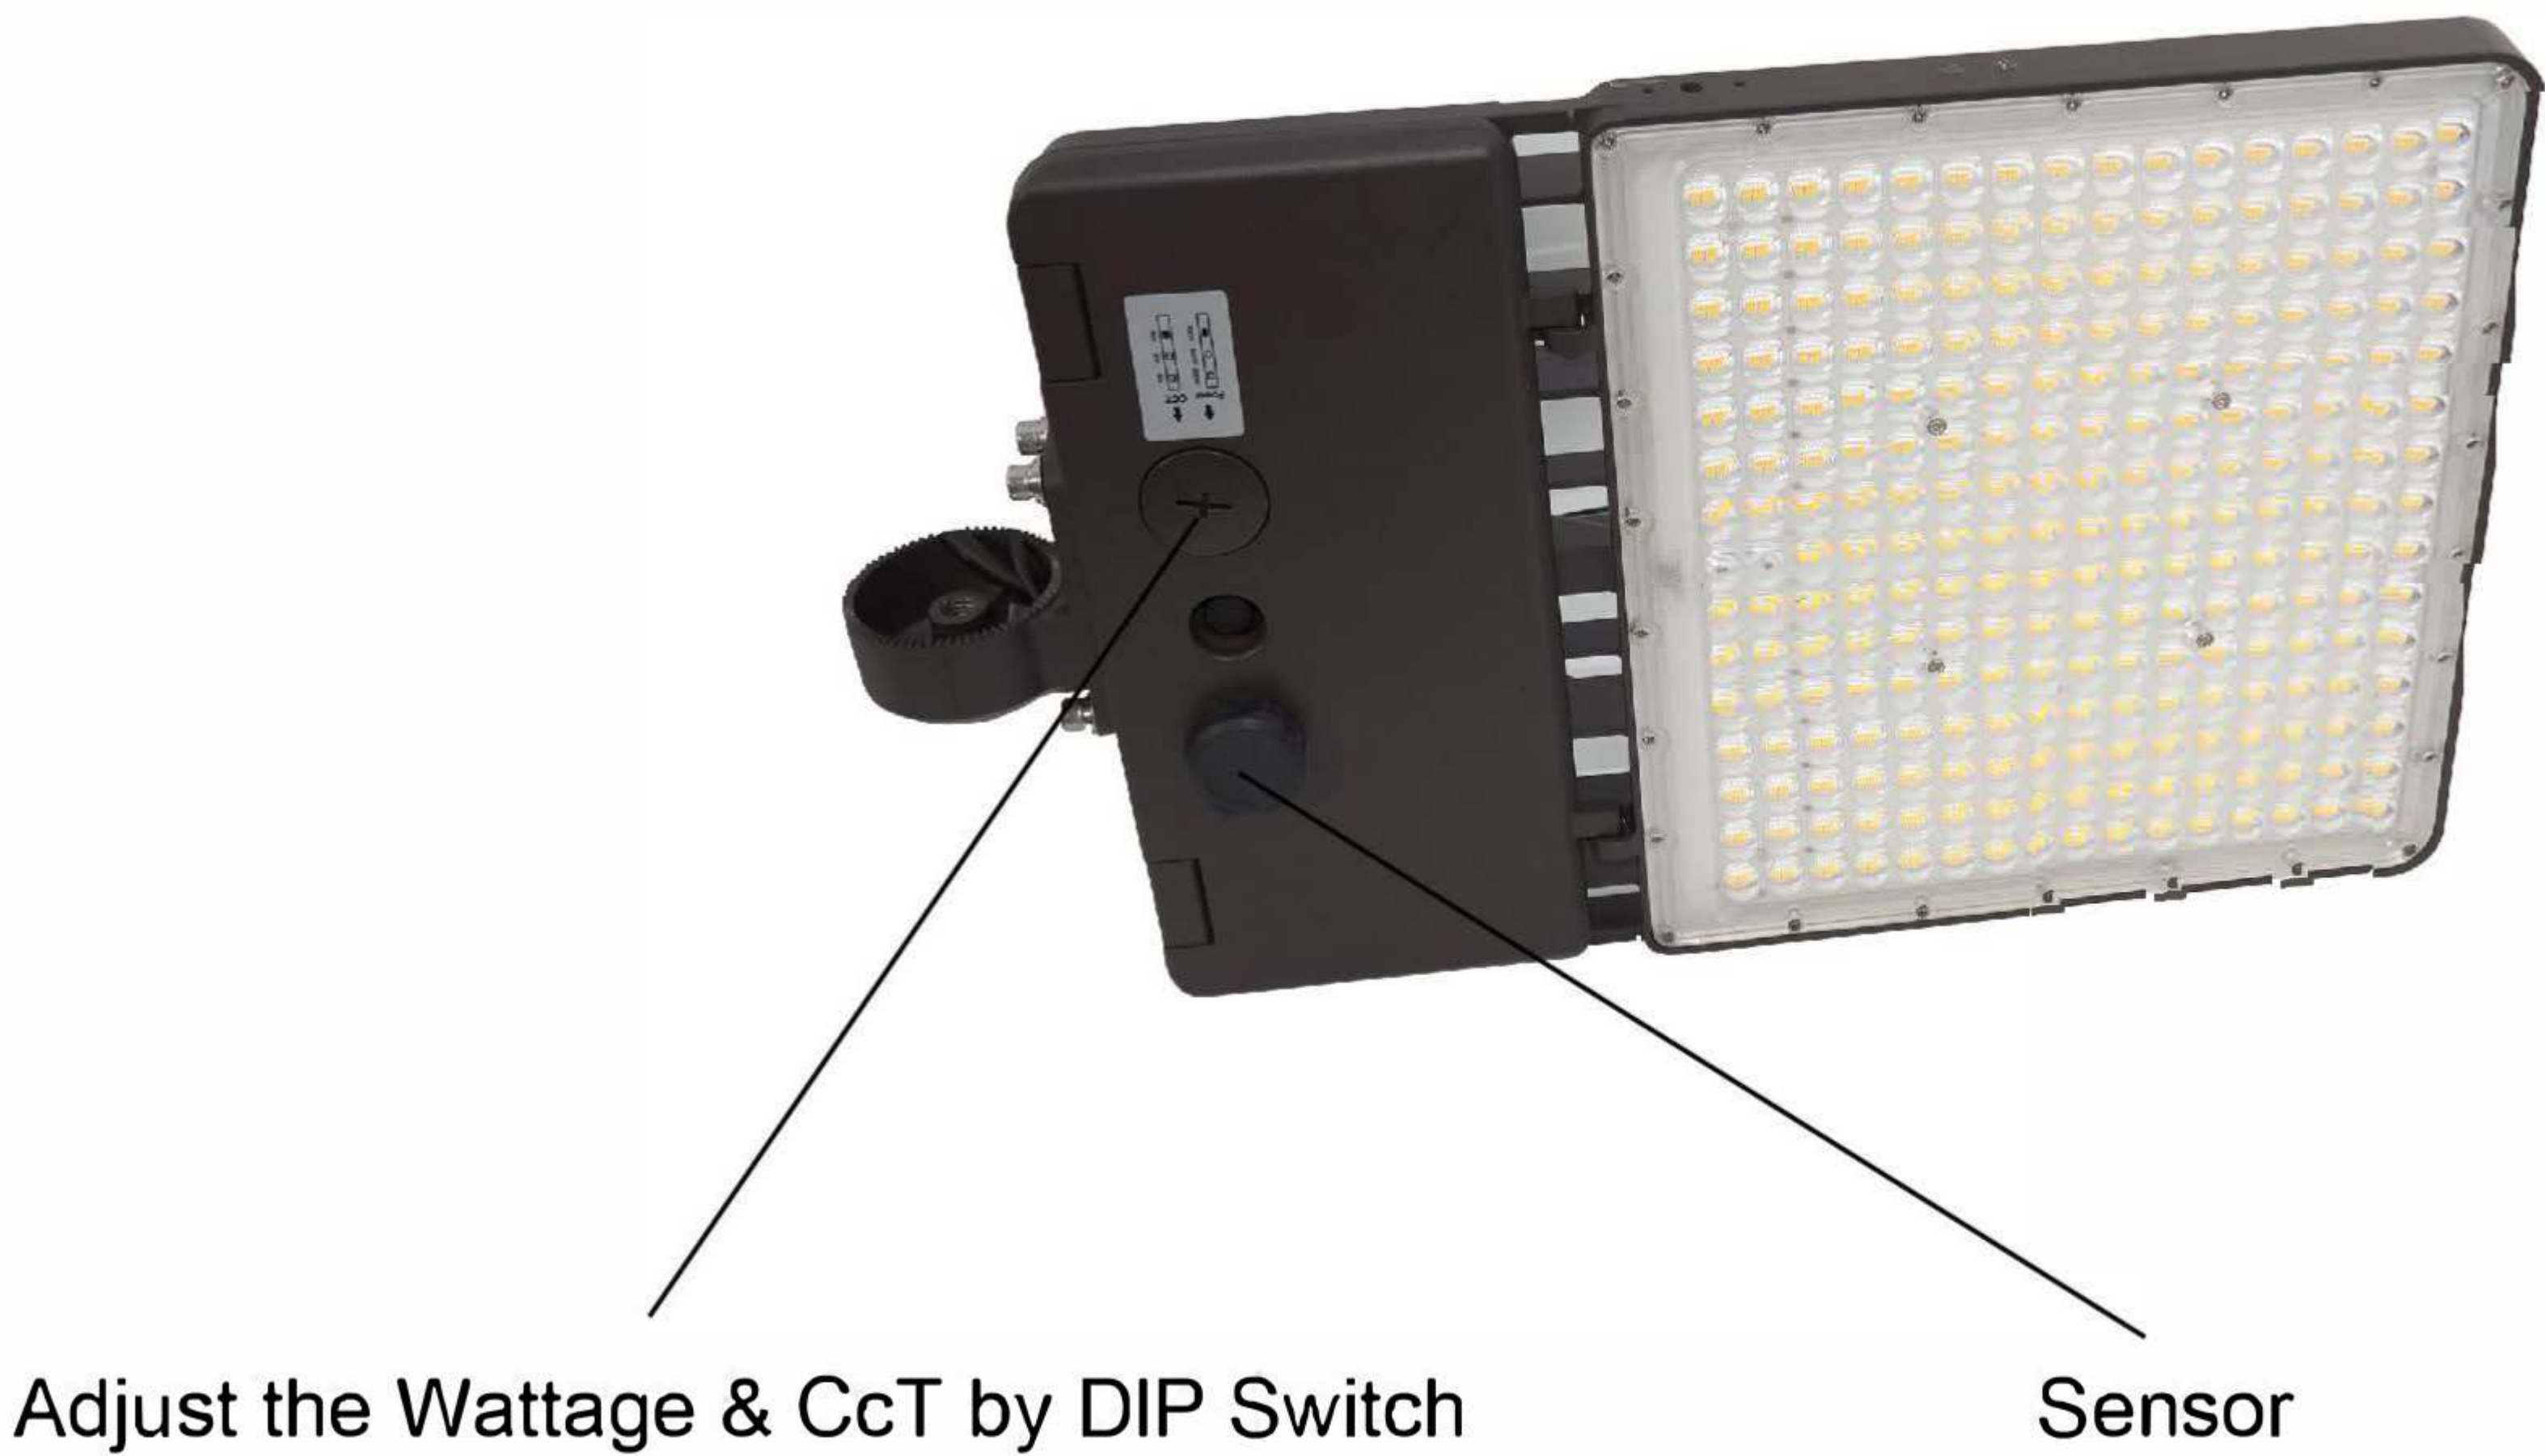

FLOOD LIGHT / FLD 55W

Key Features:



- Amazon hot sales style
- 50000Hrs long lifespan
- 3CCT with Photocell
- High performace 130lm/w
- 3 Years warranty



I SPECIFICATION

Model No	Power	Voltage	CCT	IP Rated	CRI	Lumens
FLD-55W	55W	120VAC	3000K,4000K,5000K,5700K	IP 65	RA>70	130LM/W


I DIMENSIONS



I ADJUSTABLE



3000K Warm White

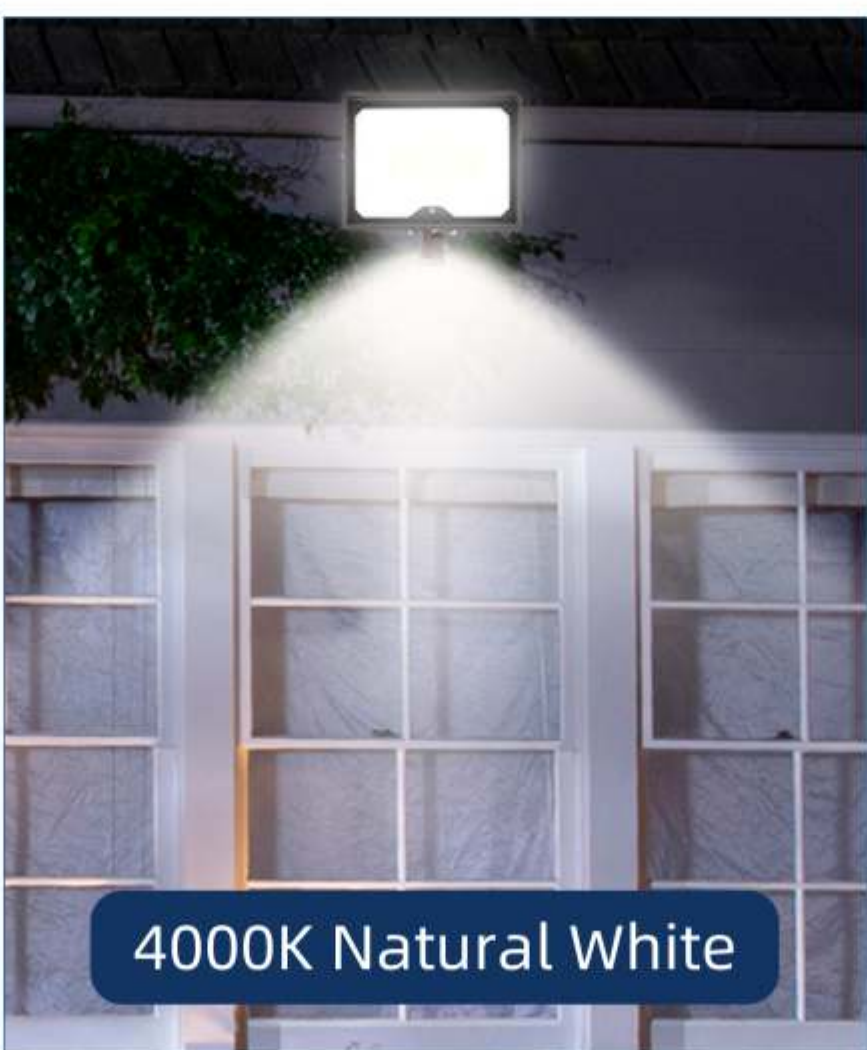

4000K Natural White



5000K Daylight

I Dusk-to-Dawn Photocell

Photocell Detects Ambient Light and Automatically Turn Light On/Off



I USAGE SCENARIO



LED Highbay Light (HBC)



Key Features:


- Unique Robust Die-cast Aluminum Housing
- Plug-and-play Sensor for Convenient Usage
- Precision Optics for Low-glare
- Lumen Efficacy 150-180LM/W
- Multiple Beam 60°, 90° & 120°
- IP65 Wet Location




I SPECIFICATION

Model No	Power	Voltage	CCT	CRI	Lumens
HBC-100W	100W	100-277V/347V	3000K,4000K,5000K,5700K	Ra>70	150lm/w & 180lm/w
HBC-150W	120W	100-277V/347V	3000K,4000K,5000K,5700K	Ra>70	150lm/w & 180lm/w
HBC-200W	200W	100-277V/347V	3000K,4000K,5000K,5700K	Ra>70	150lm/w & 180lm/w
HBC-240W	240W	100-277V/347V	3000K,4000K,5000K,5700K	Ra>70	150lm/w & 180lm/w
HBC-300W	300W	100-277V/347V	3000K,4000K,5000K,5700K	Ra>70	150lm/w & 180lm/w


I DIMENSIONS

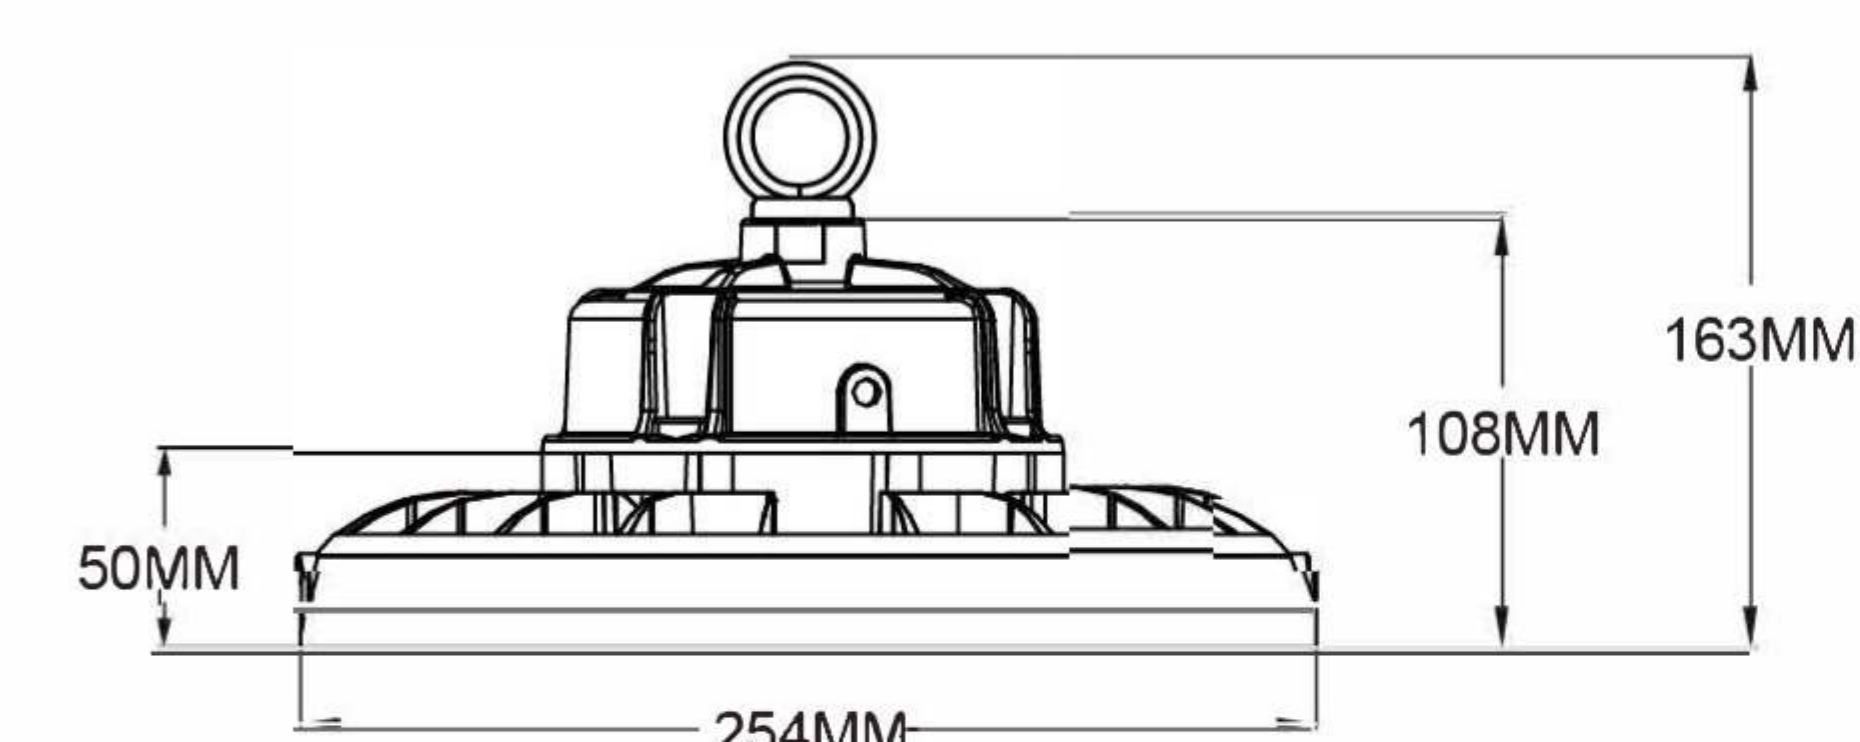


HBC100W

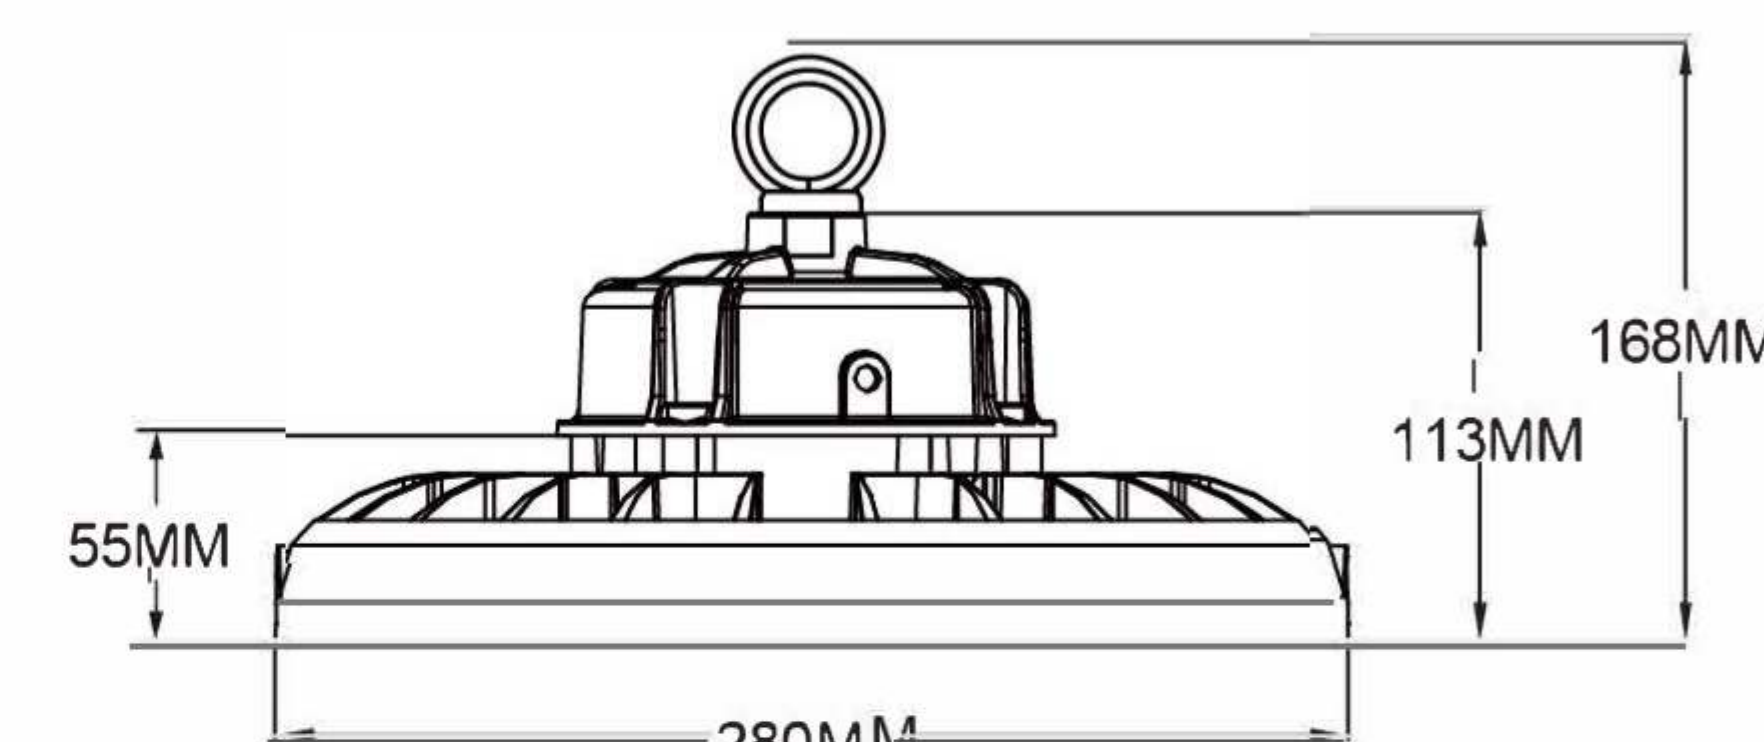

HBC150W

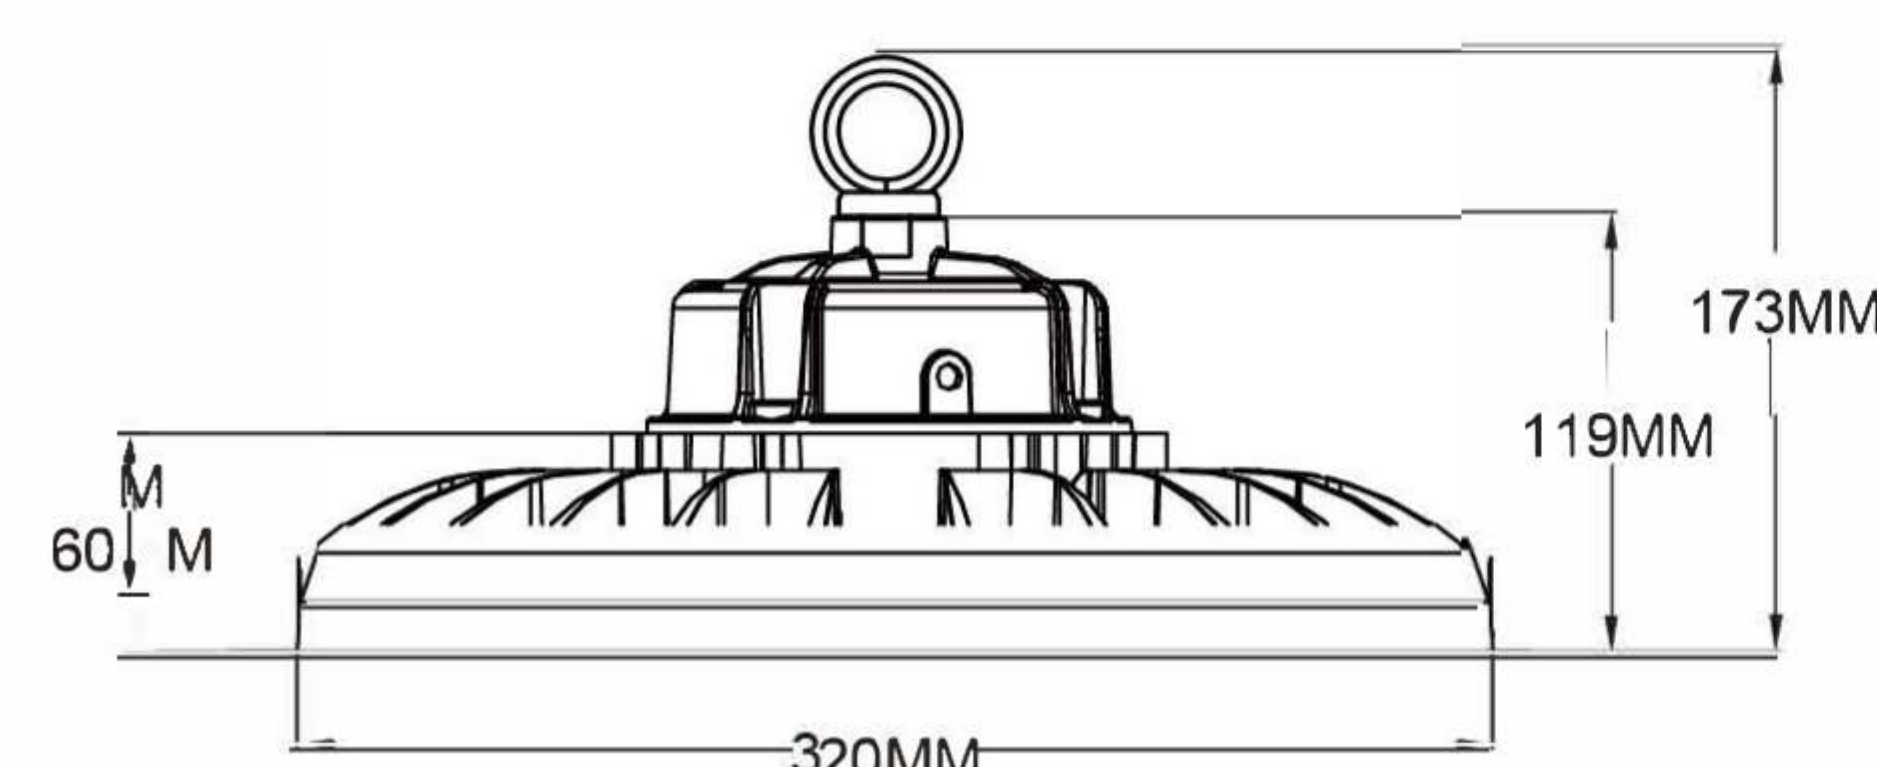

HBC200W

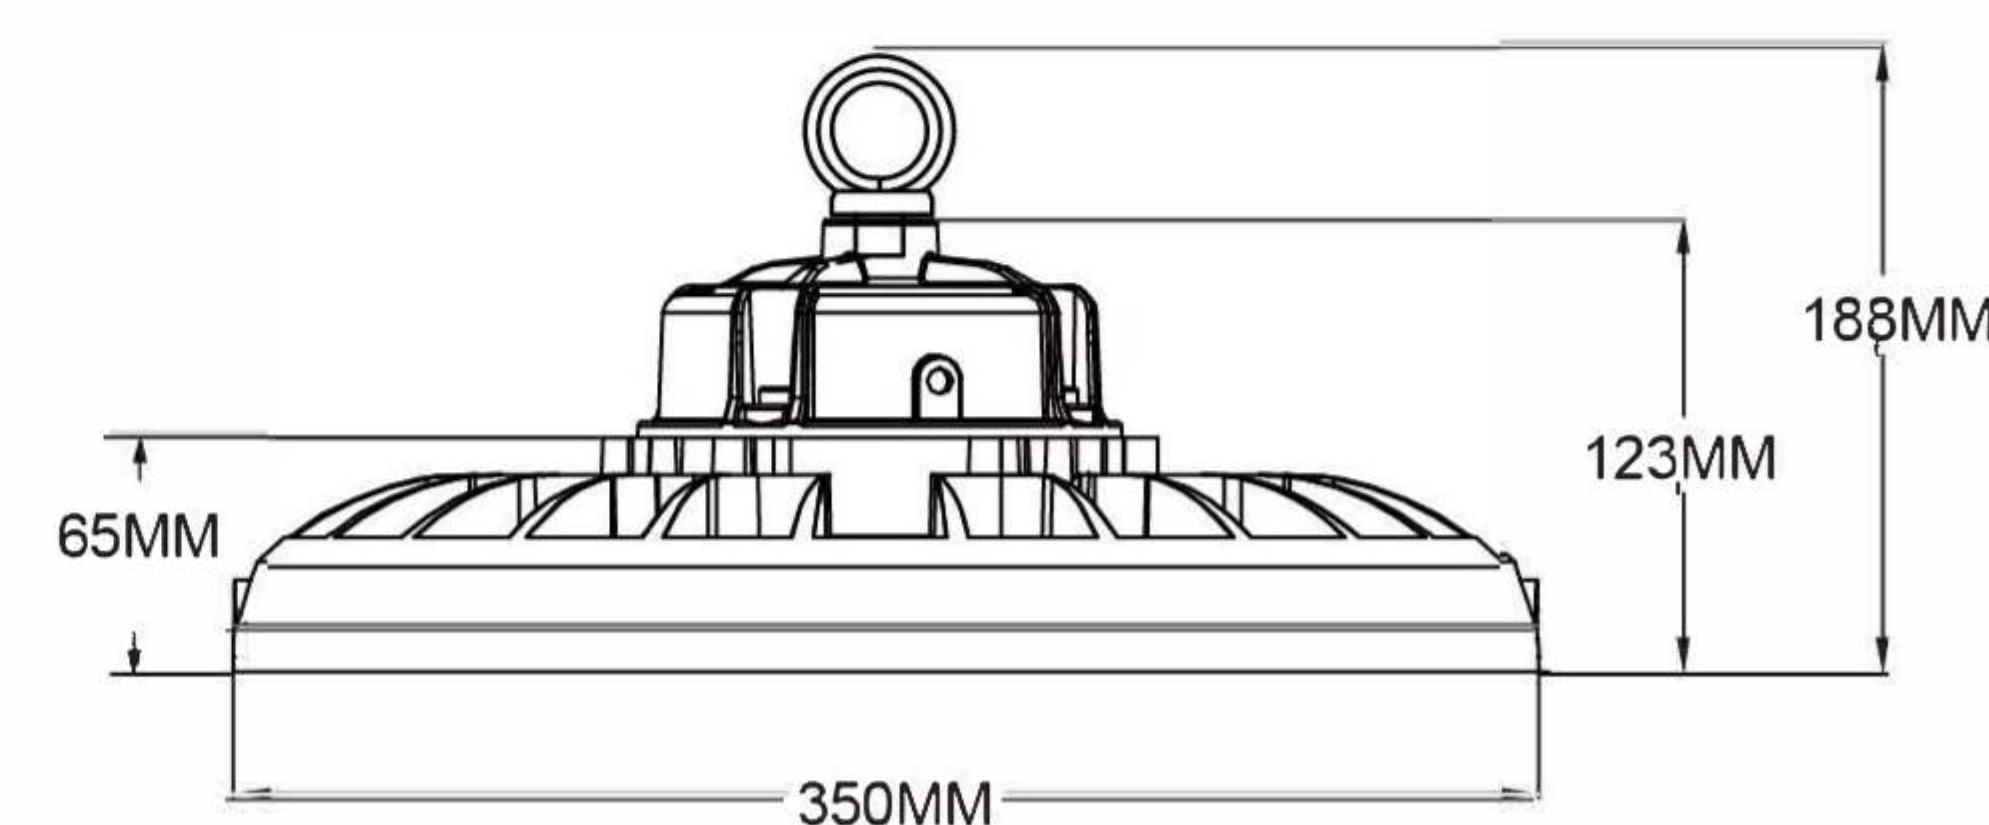

HBC240W / 300W

I ADDITIONAL ACCESSORY



Sensor Base



Sensor
Microwave Sensor



U Bracket



CCT & Power Selectable

I LENS BEAM ANGLE



60 Degree
Circular Lens



90/120 Degree
Circular Lens




120 Degree
Dome Lens

I DIFFERENT CHOICE



Optional 6 : Reflector

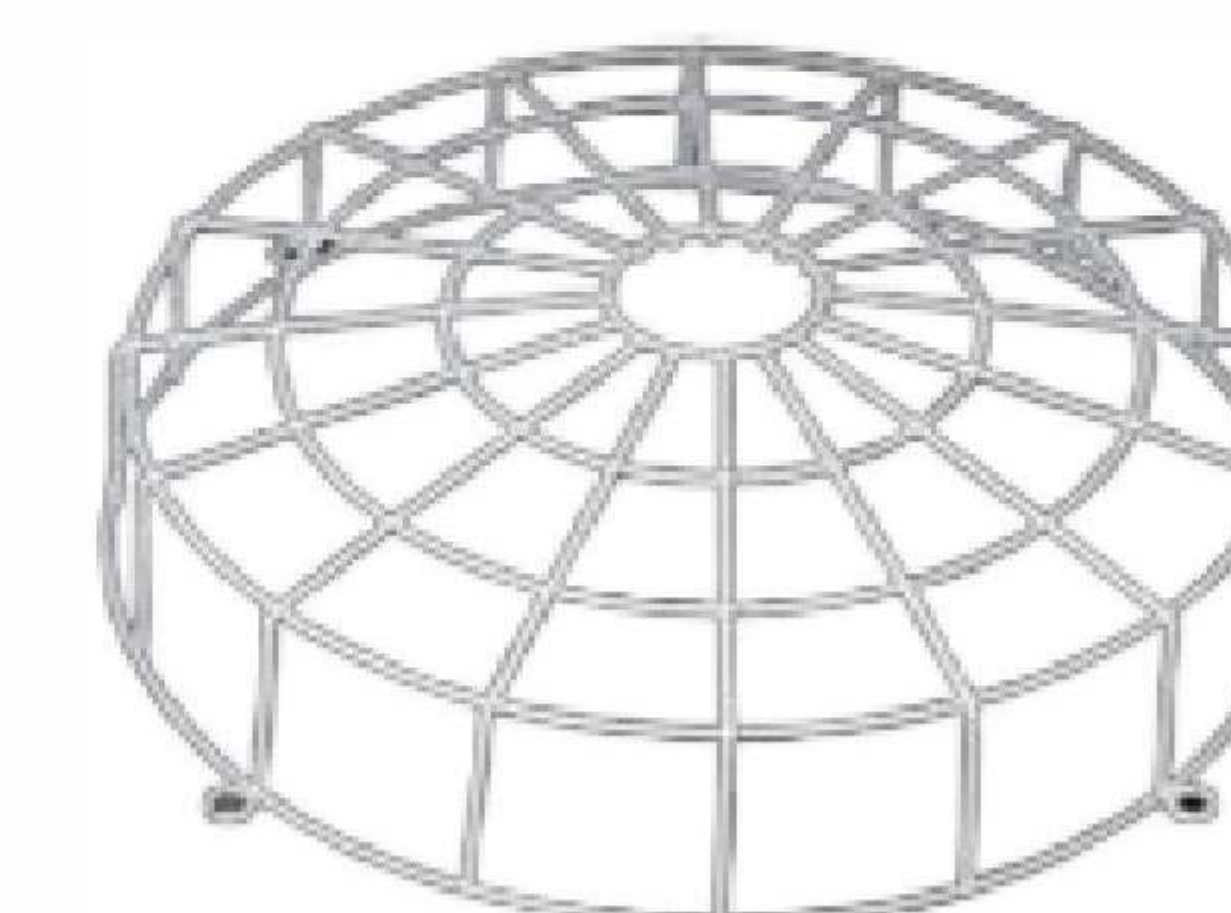


Optional 7 : Wire Guard

LED Highbay Light (HBC3)



Key Features:


- 150lm/w & 180lm/W
- UGR<28
- IK08
- 0-10V dimming
- UL cUL DLC 5.1 Premium listed
- Die-cast aluminum housing with powder coat finish
- High efficacy 150lm/W, 170lm/W Optional




I SPECIFICATION

Model No	Power	Voltage	CCT	CRI	Lumens
HBC3-100W	100W	100-277V/347V	3000K,4000K,5000K,5700K	Ra>70	150lm/w & 180lm/w
HBC3-120W	120W	100-277V/347V	3000K,4000K,5000K,5700K	Ra>70	150lm/w & 180lm/w
HBC3-150W	150W	100-277V/347V	3000K,4000K,5000K,5700K	Ra>70	150lm/w & 180lm/w
HBC3-200W	200W	100-277V/347V	3000K,4000K,5000K,5700K	Ra>70	150lm/w& 180lm/w

I DIMENSIONS

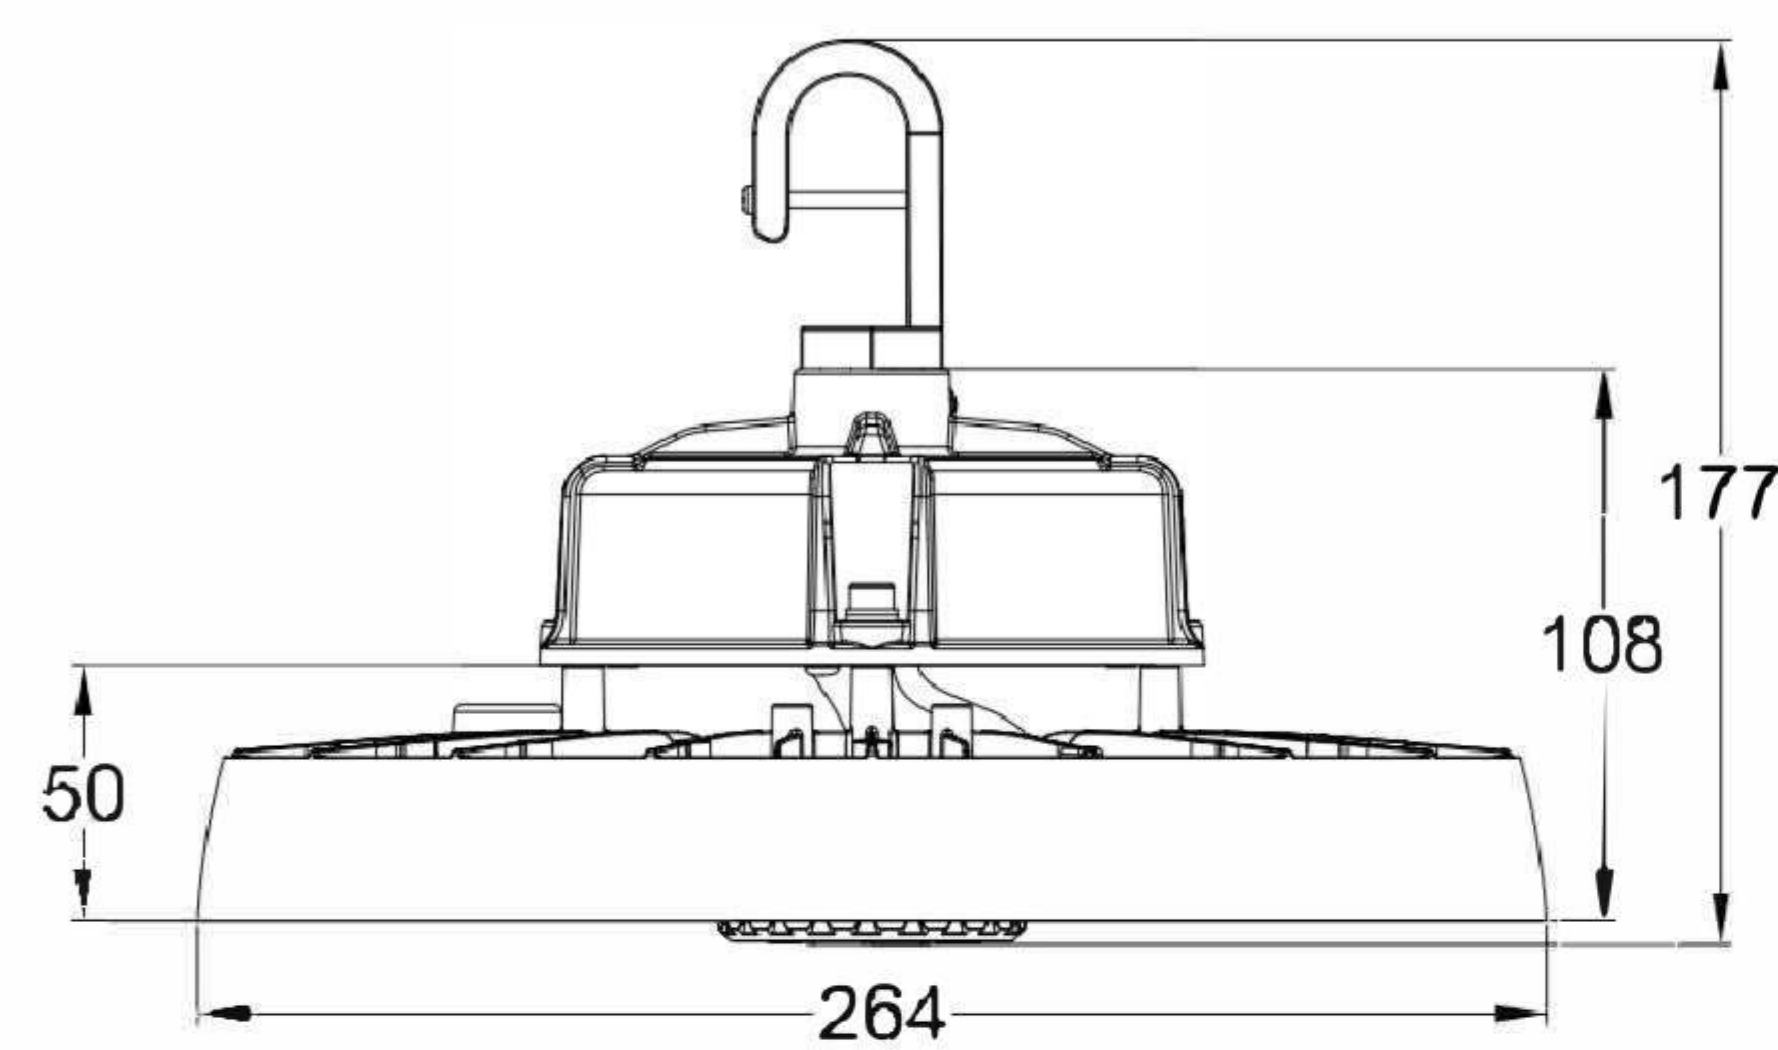


HBC100W/ 120W

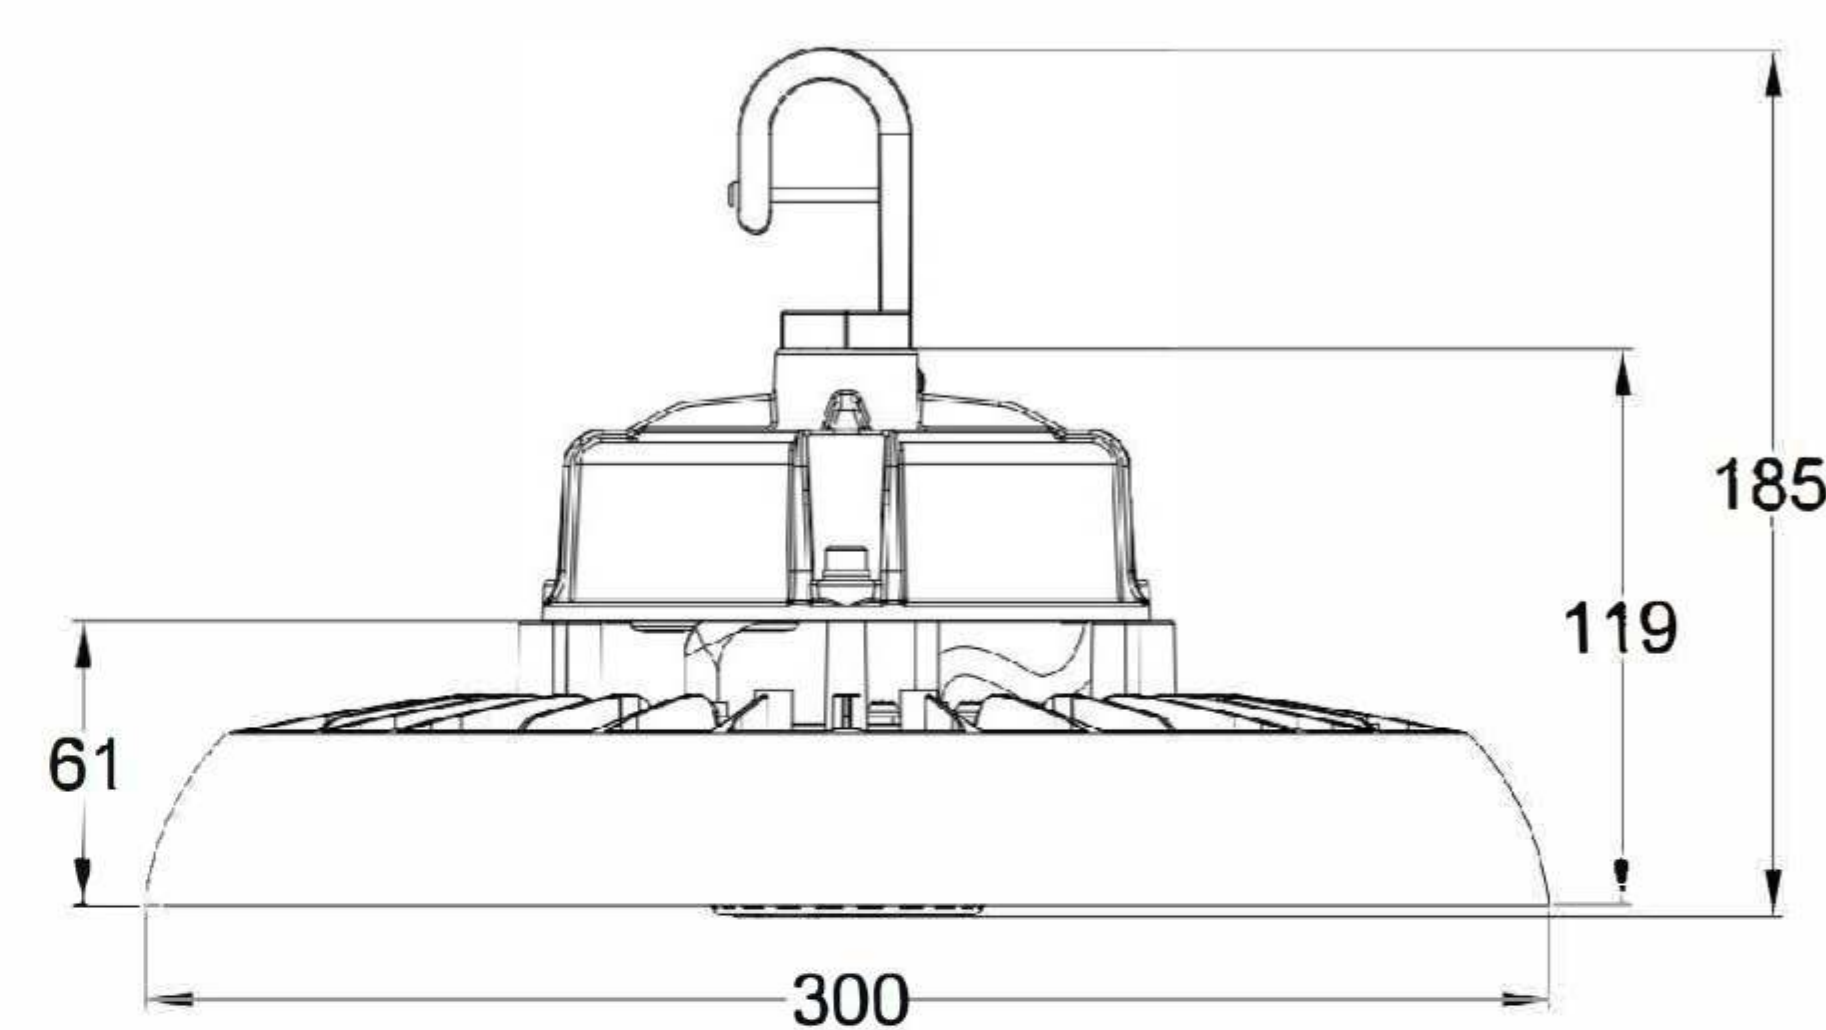

HBC150W / 200W

I ADDITIONAL ACCESSORY

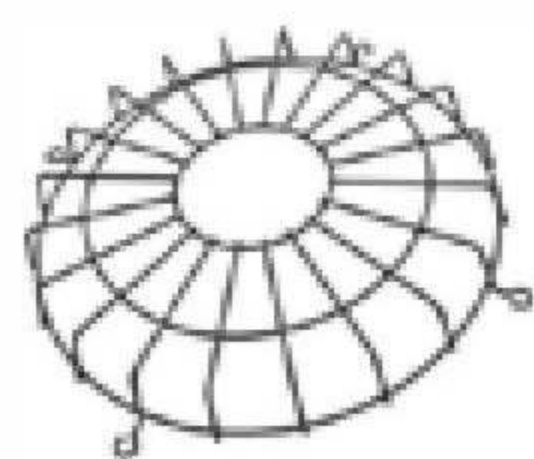

Wire Guard



PC reflector



Microwave Motion Sensor




Pandent mounting




Celing with loop

I REFLECTOR OPTIONS

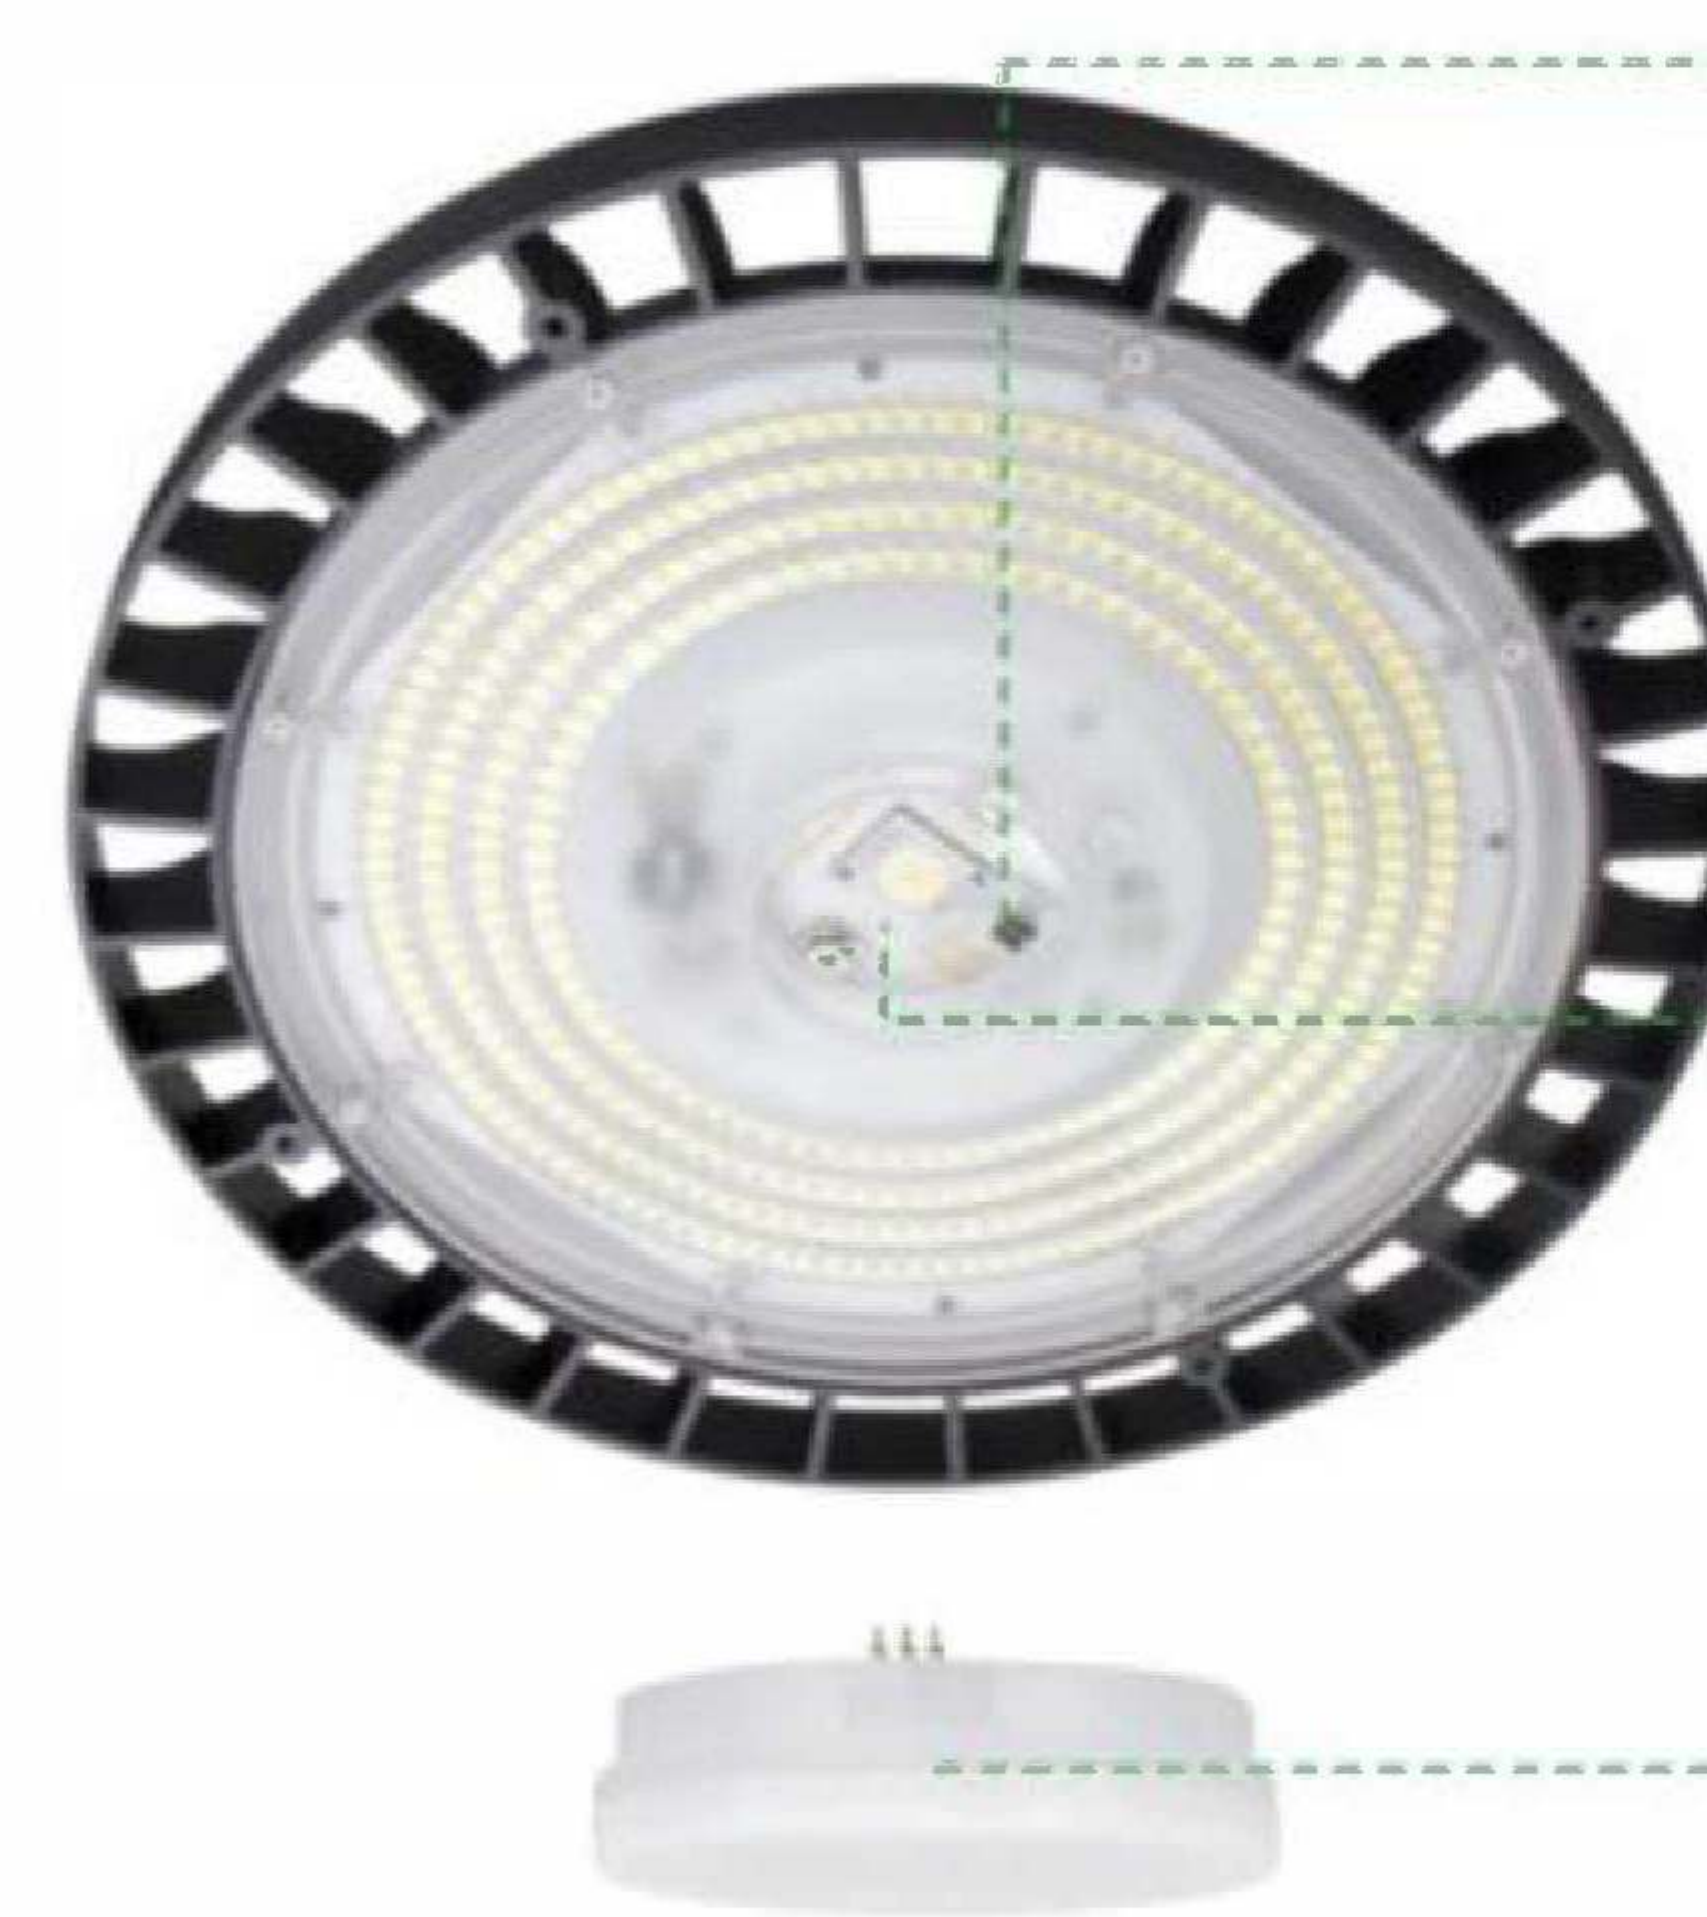


4-POWER DIP-Switchable

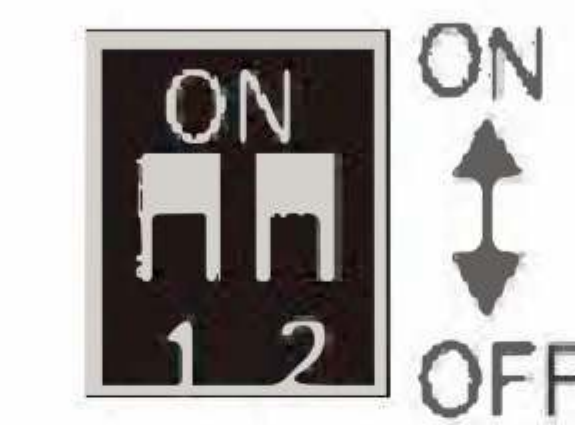

OFF	OFF	200W	150W	120W
OFF	ON	150W	120W	100W
ON	OFF	100W	100W	80W
ON	ON	65W	65W	65W

2-CCT Switchable

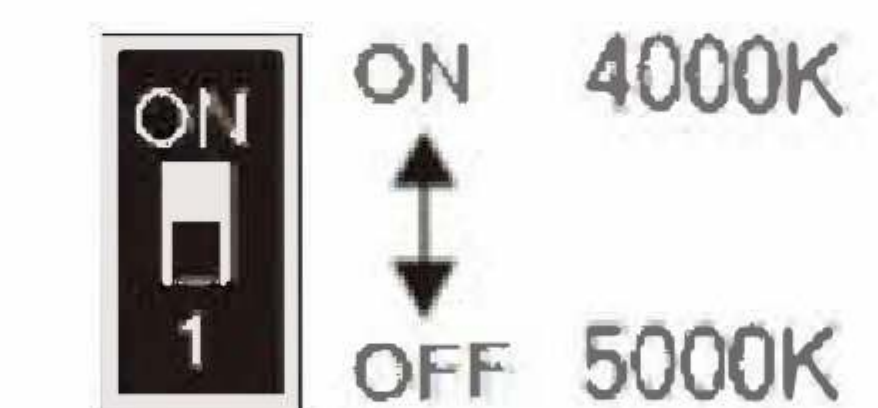

Microwave sensor cover(Plug & Play)

Multi-Power & CCT

The fixture is with :

4-POWER(Power can be customized):

200W-150W-100W-65W Selectable

150W-120W-100W-65W Selectable

120W-100W-80W-65W Selectable

2 CCT: 4000K-5000K Selectable 8-SKUs in one,
it is helpful for you to make inventory reserve.


Smart Control:

The fixture is with SENSOR SOCKET in standard,when you need the sensor function, only need to plug the SENSOR

COVER:

Our Normal Sensor support dual control modes, DIP-Switch and remote control together.

I USAGE SCENARIO

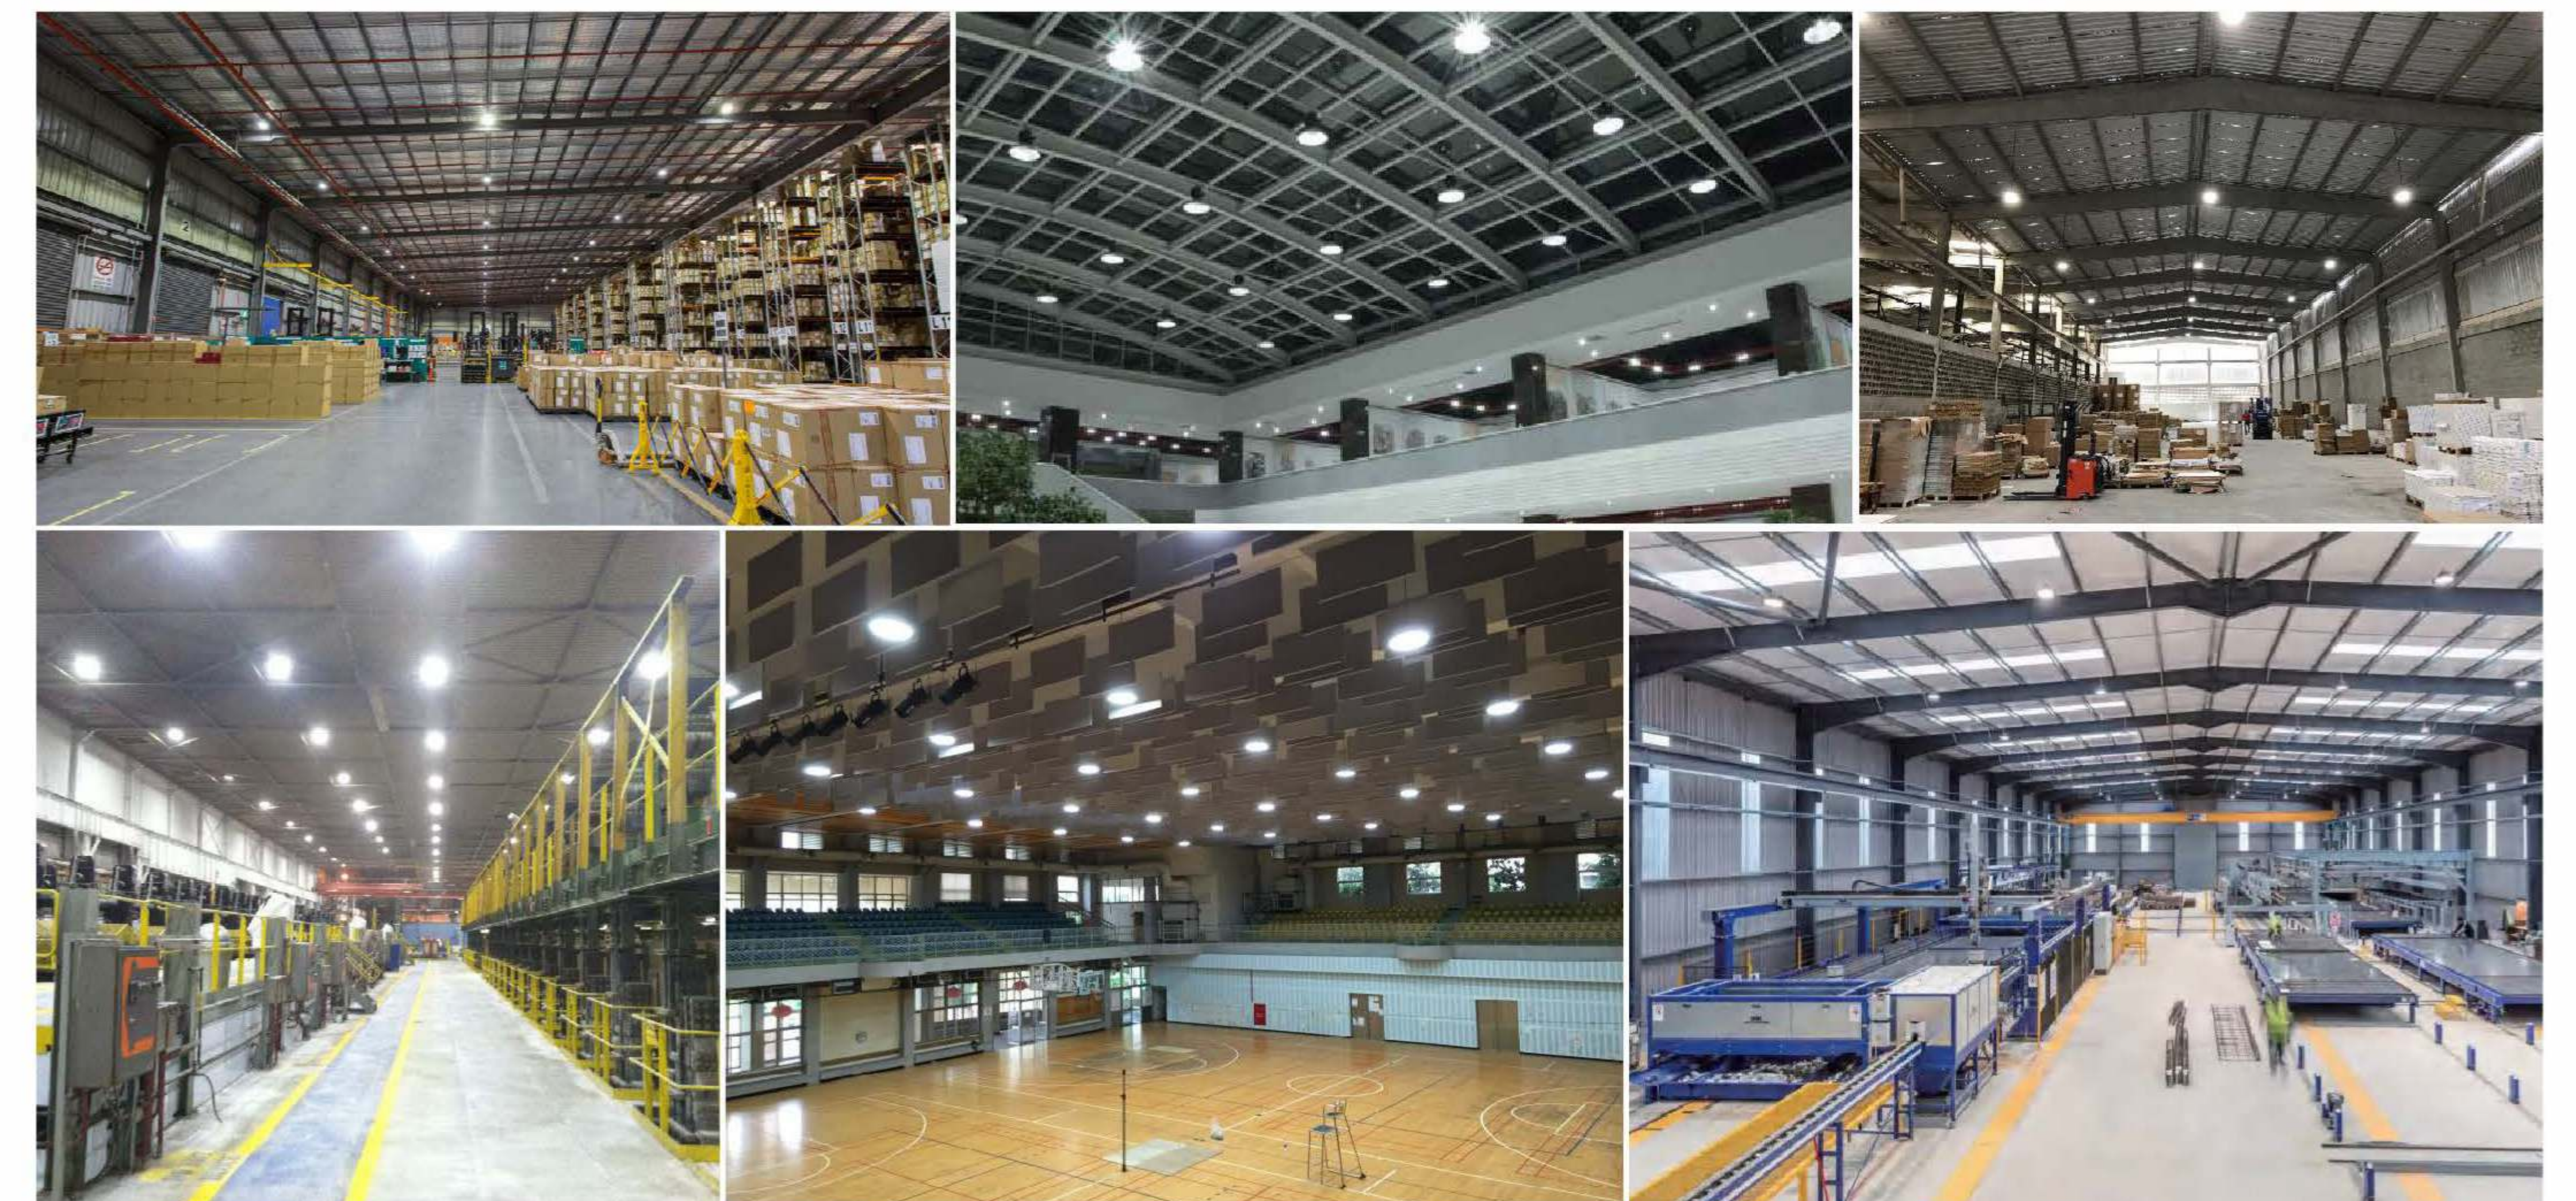

SQUARE LED CANOPY LIGHT

Key Features:




- 135lm/W
- UGR<28
- 0-10V dimming
- UL cUL DLC 5.1 Premium listed
- Aluminum housing and Low glare
- UV resistant polycarbonate lens
- Pendant and surface mount






SPECIFICATION

Model No	Power	Voltage	CCT	CRI	Lumens
ML CNPC-60/40/20W	60/40/20W	100-277V/220-480V	3000K,4000K,5000K,5700K	Ra>80, $\circ$	135lm/w
ML-CNPC-80/60/40W	80/60/40W	100-277V/220-480V	3000K,4000K,5000K,5700K	Ra>80, $\circ$	135lm/w
ML-CNPC-100/80/60W	100/80/60W	100-277V/220-480V	3000K,4000K,5000K,5700K	Ra>80, $\circ$	135lm/w

DIMENSIONS

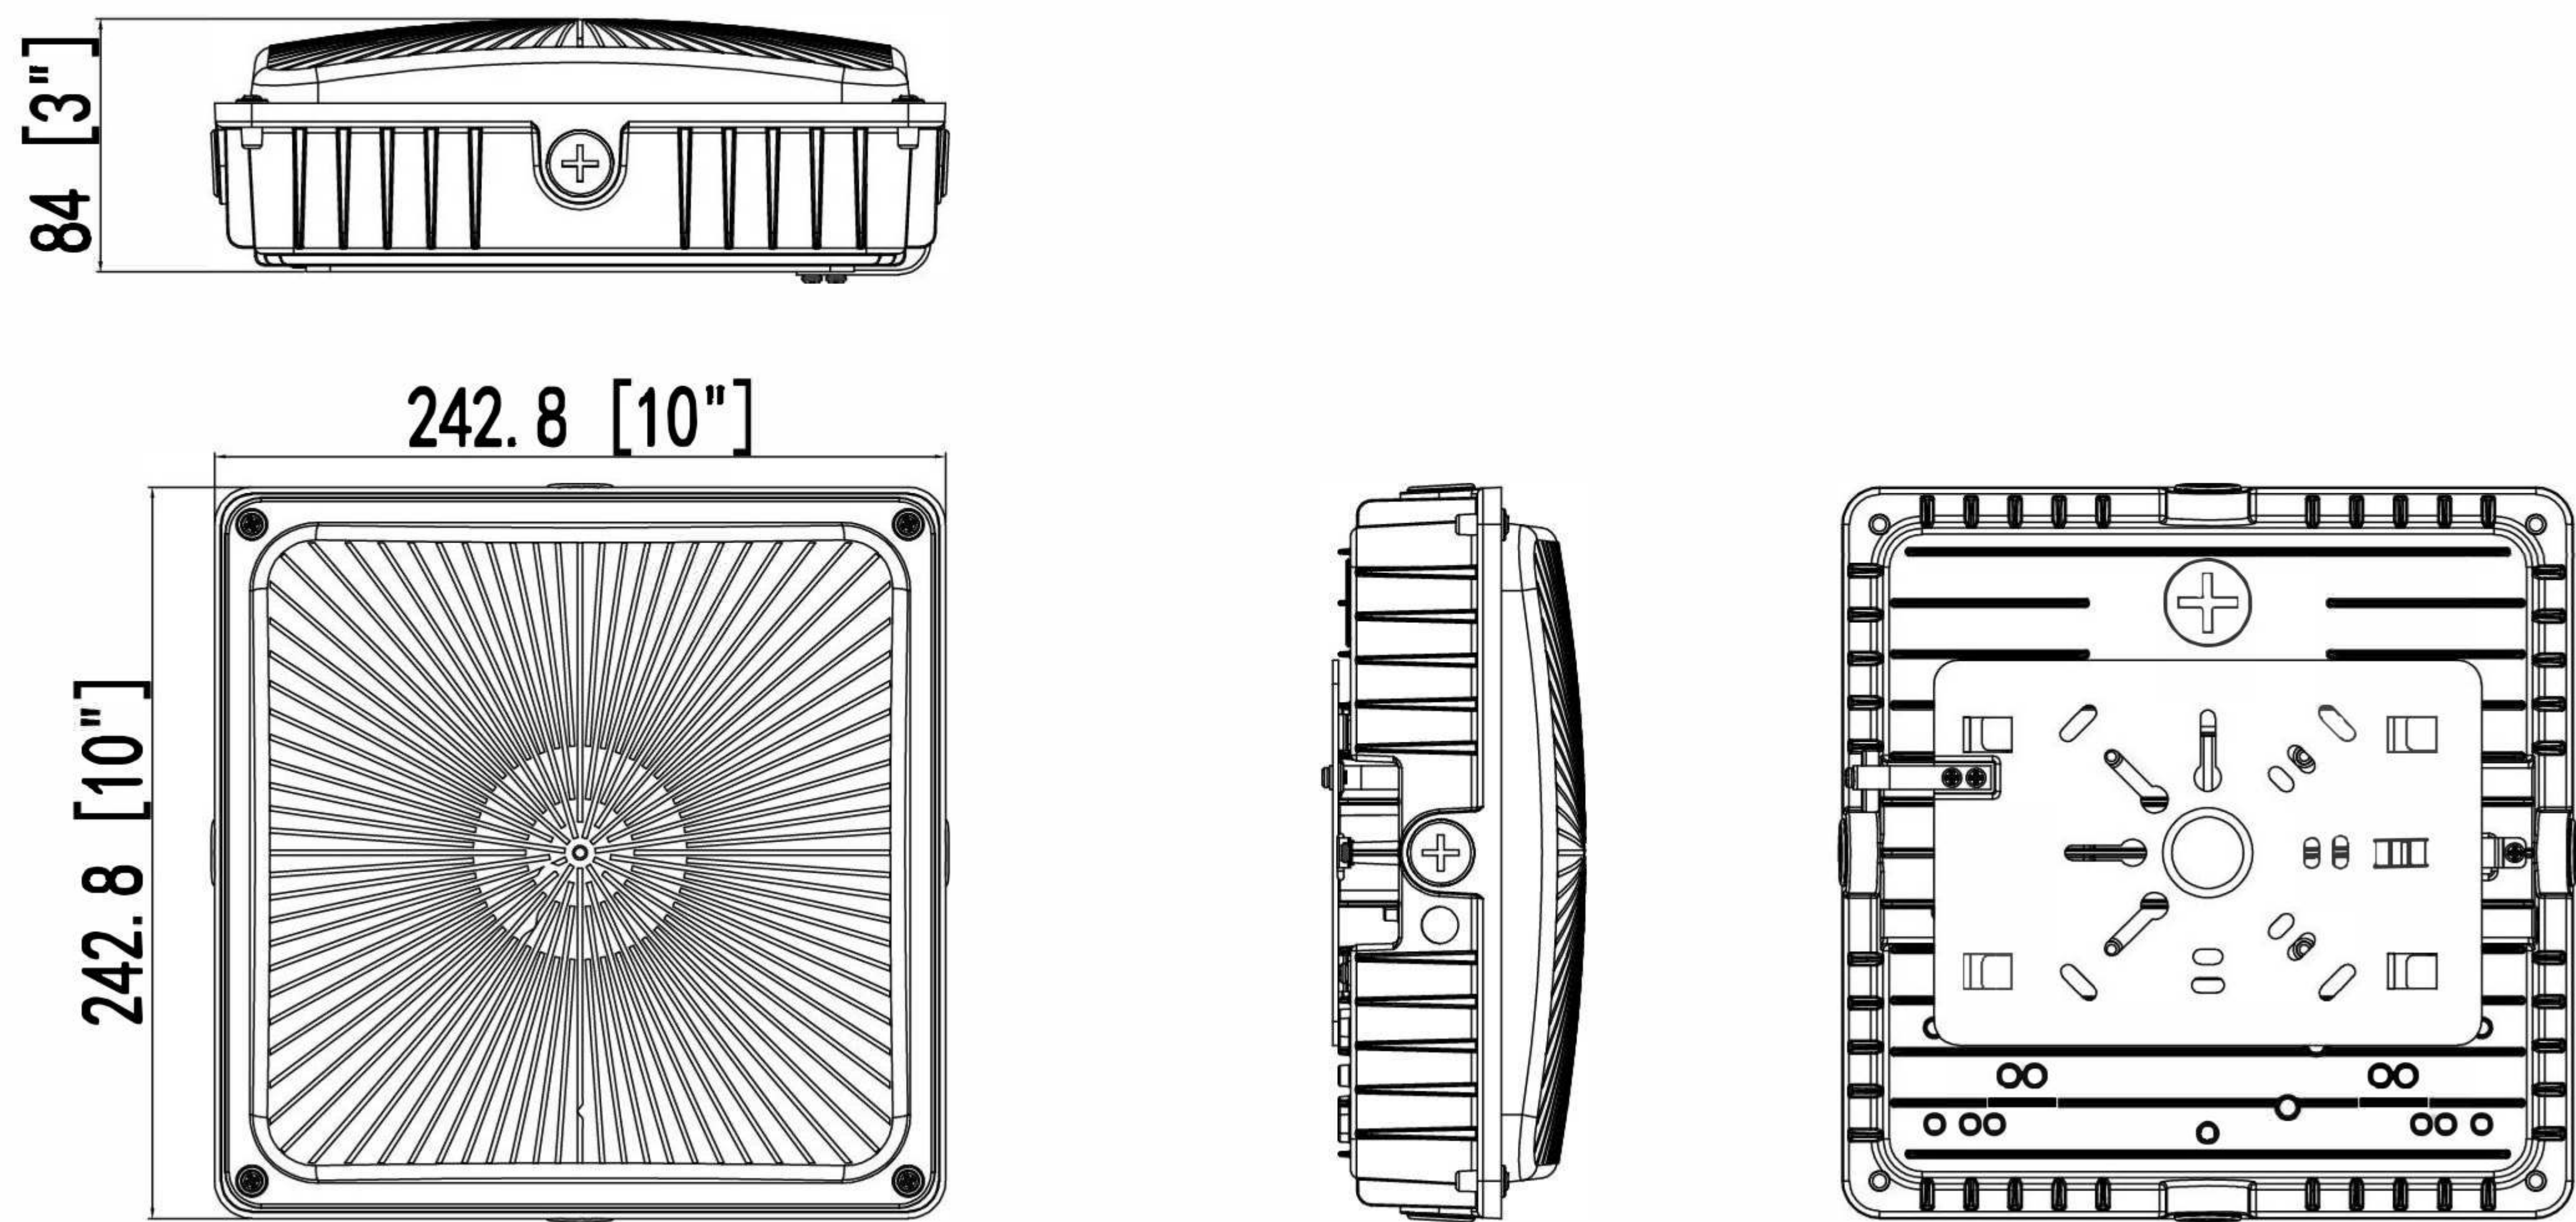

USAGE SCENARIO

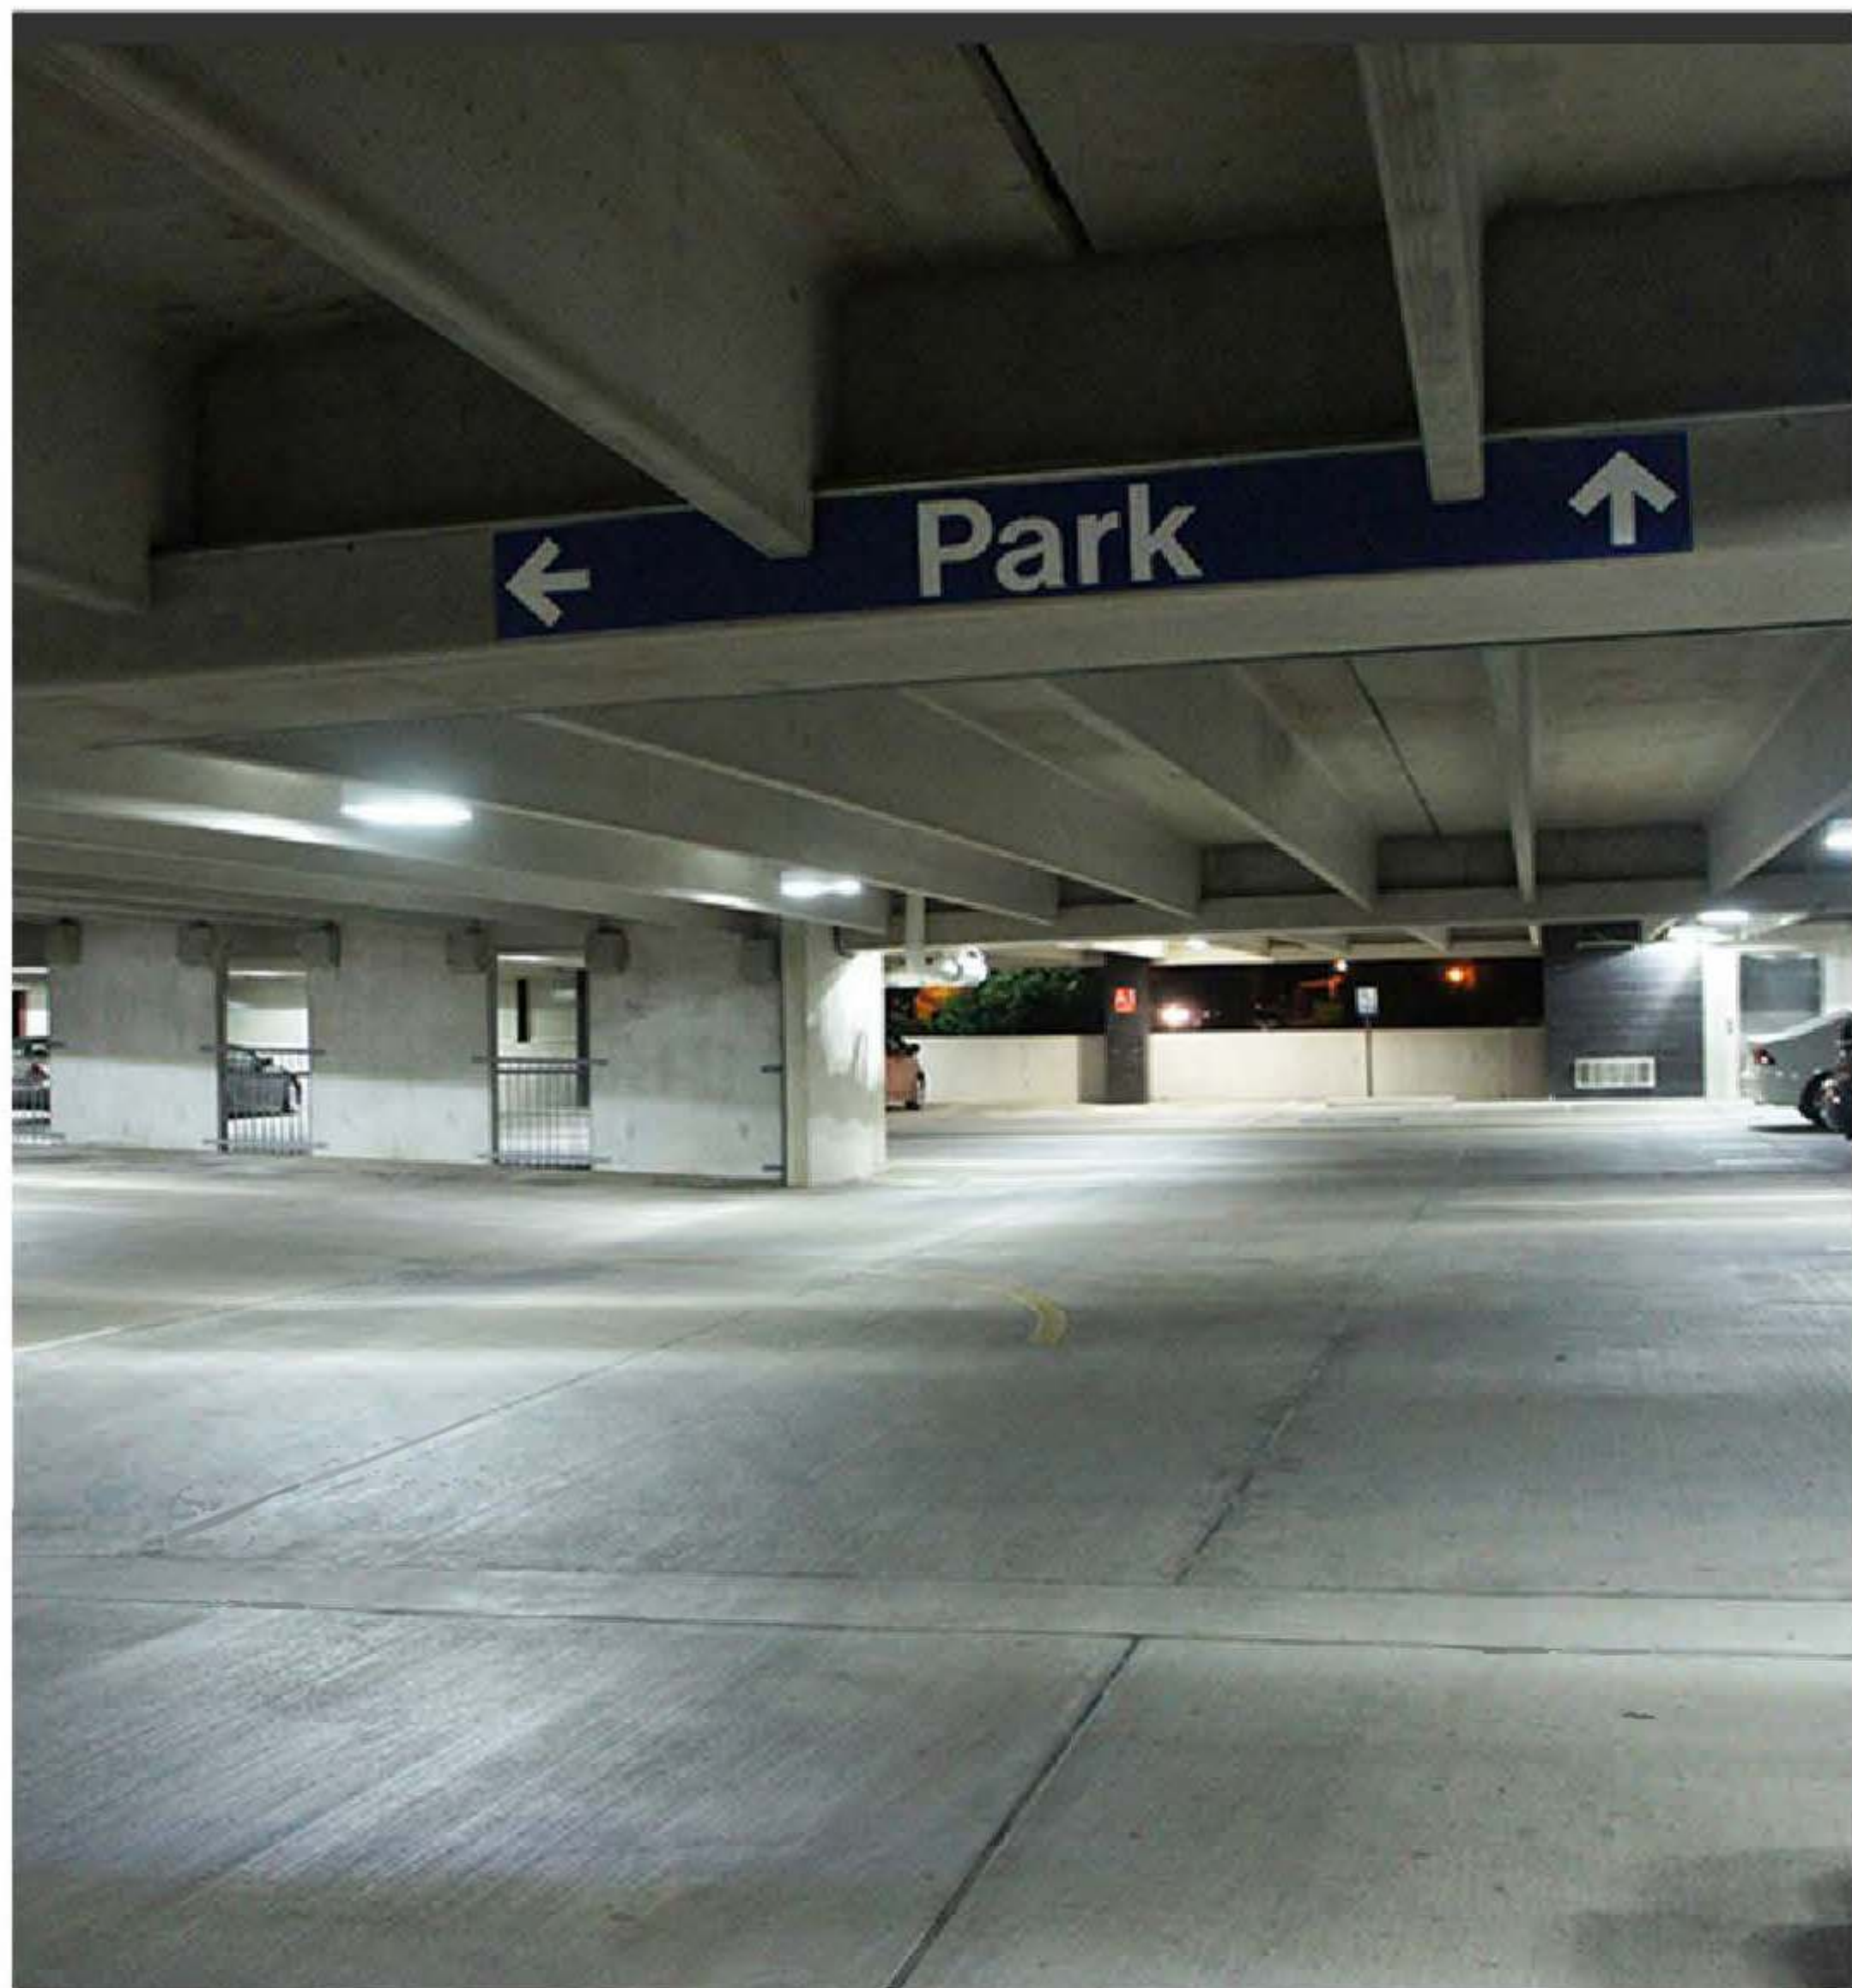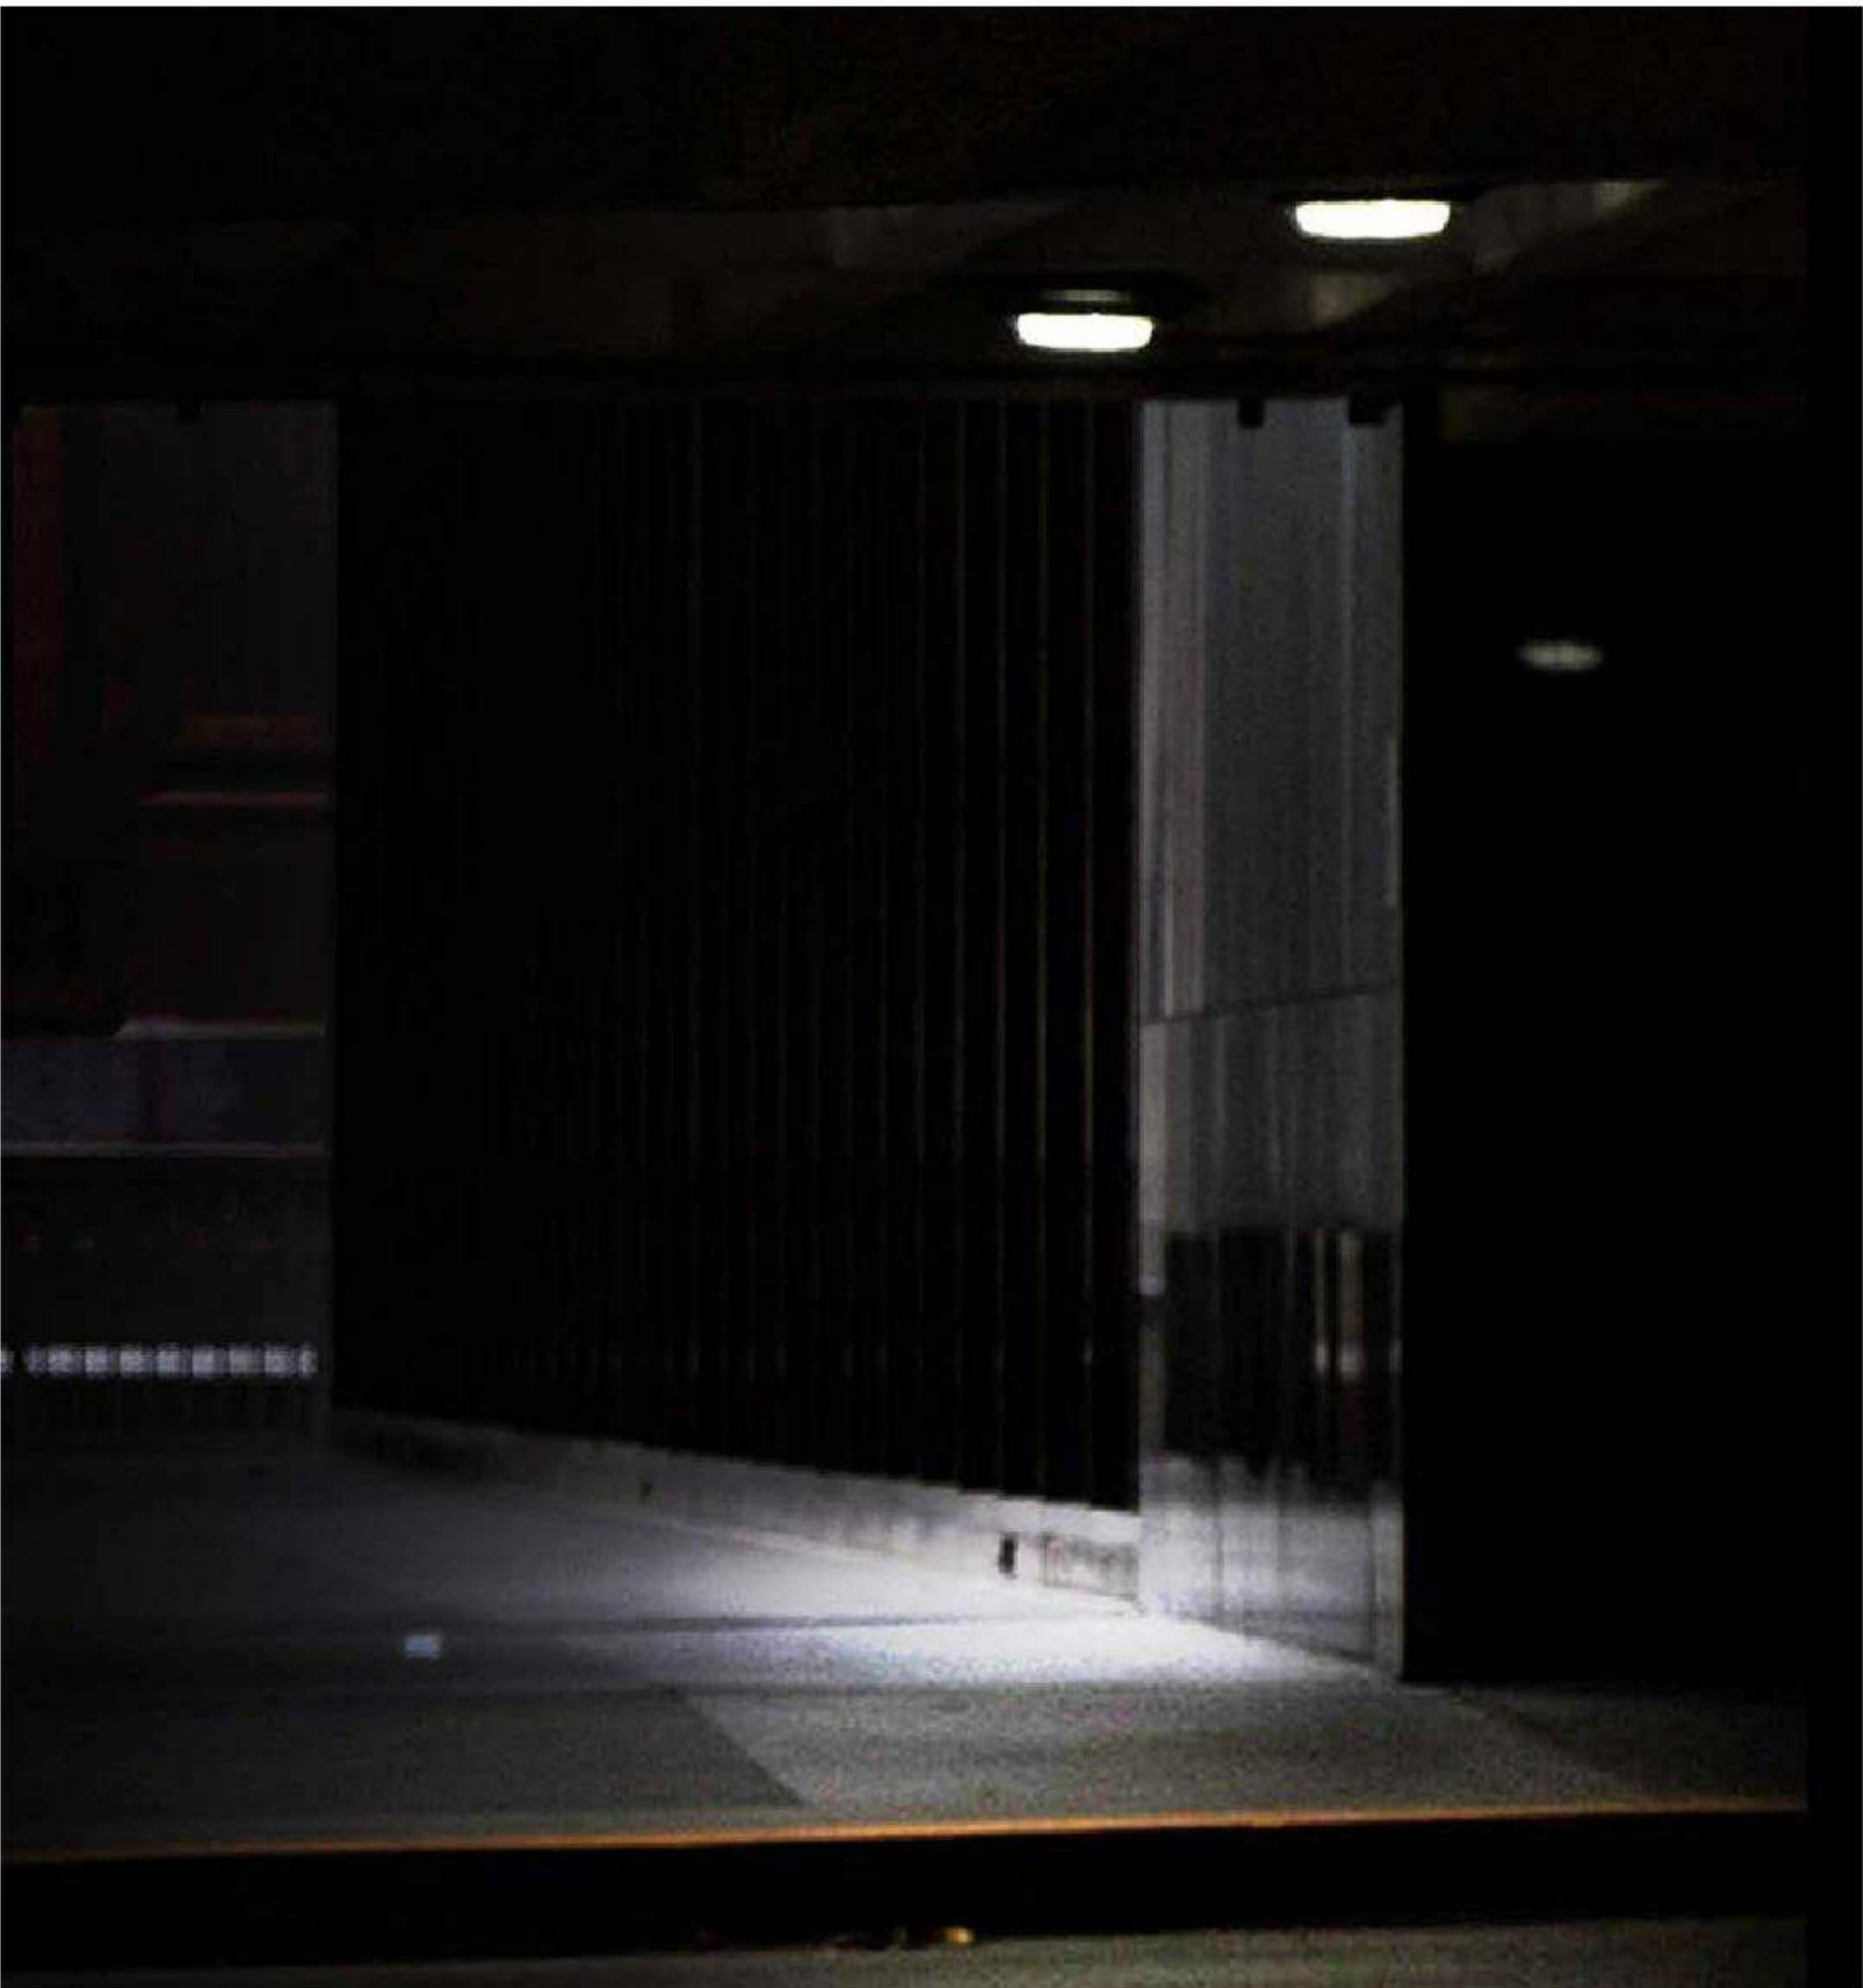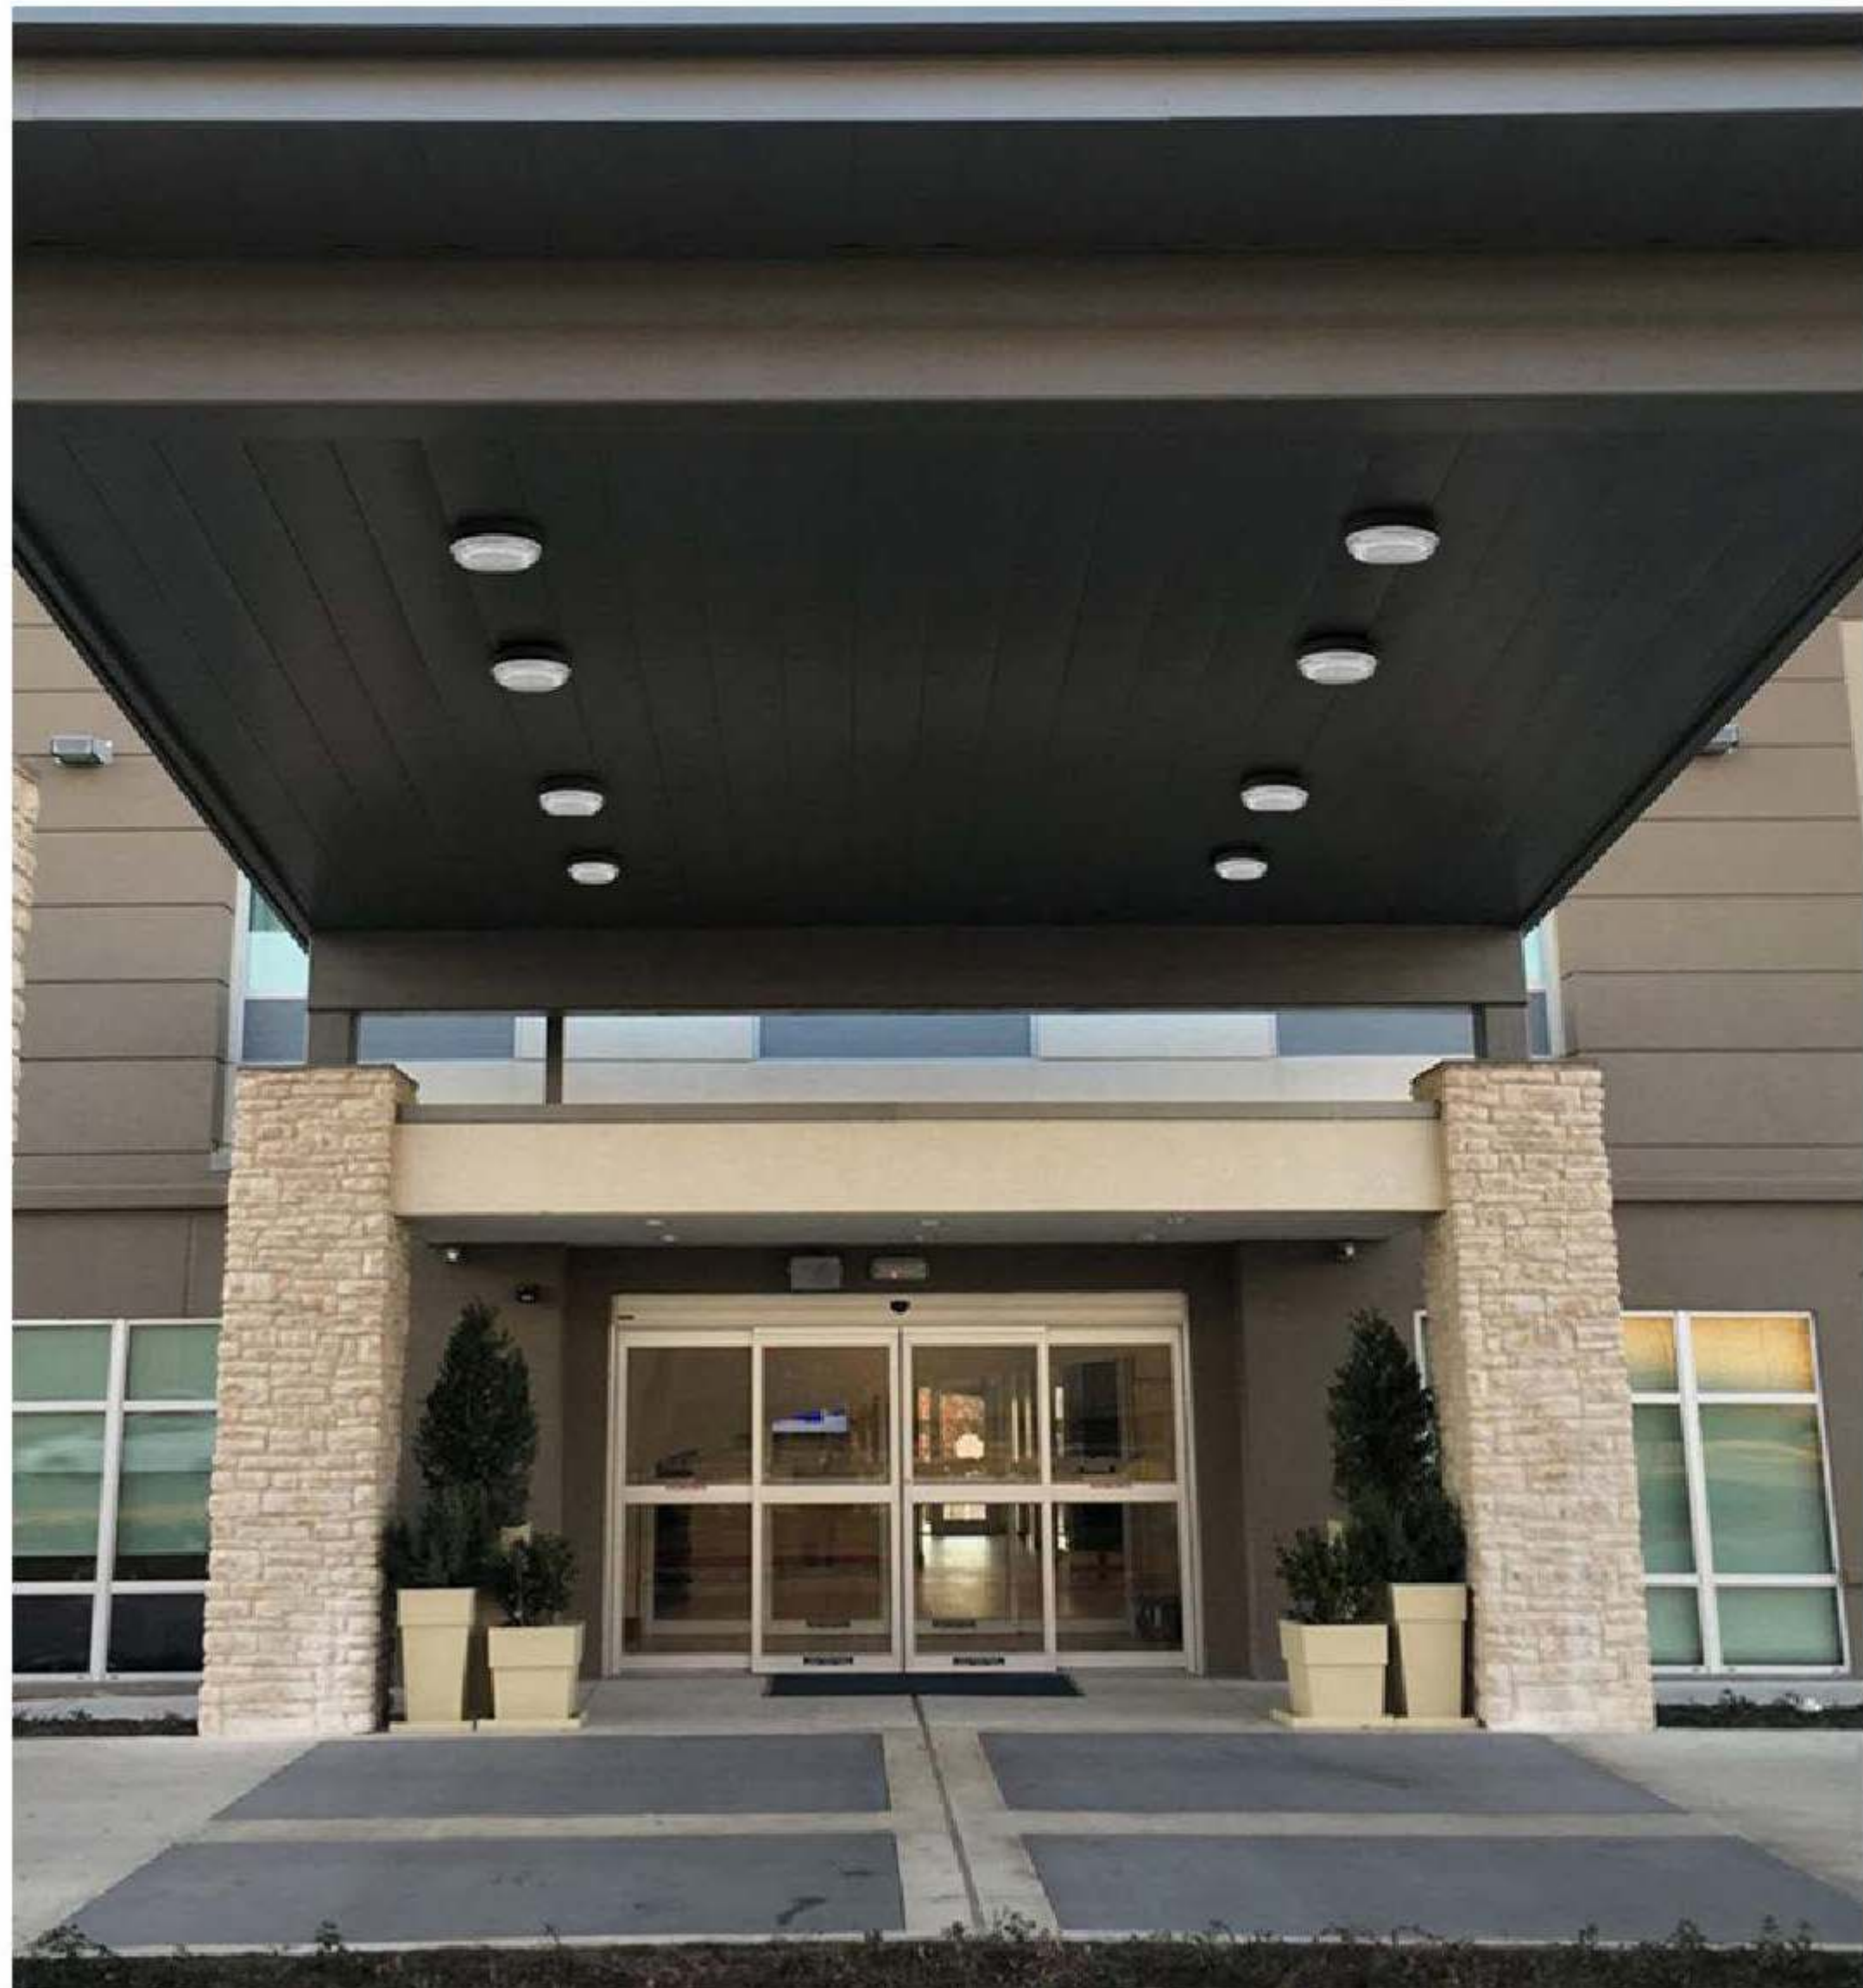

SQUARE LED CANOPY LIGHT

Key Features:




- 135lm/W
- UGR<28
- 0-10V dimming
- UL cUL DLC 5.1 Premium listed
- Aluminum housing and Low glare
- UV resistant polycarbonate lens
- Pendant and surface mount



I SPECIFICATION

Model No	Power	Voltage	CCT	CRI	Lumens
ML-CNPD-60/40/20W	60/40/20W	100-277V/220-480V	3000K,4000K,5000K,5700K	Ra>80	135lm/w
ML-CNPD-80/60/40W	80/60/40W	100-277V/220-480V	3000K,4000K,5000K,5700K	Ra>80	135lm/w
ML-CNPD-100/80/60W	100/80/60W	100-277V/220-480V	3000K,4000K,5000K,5700K	Ra>80	135lm/w

I DIMENSIONS

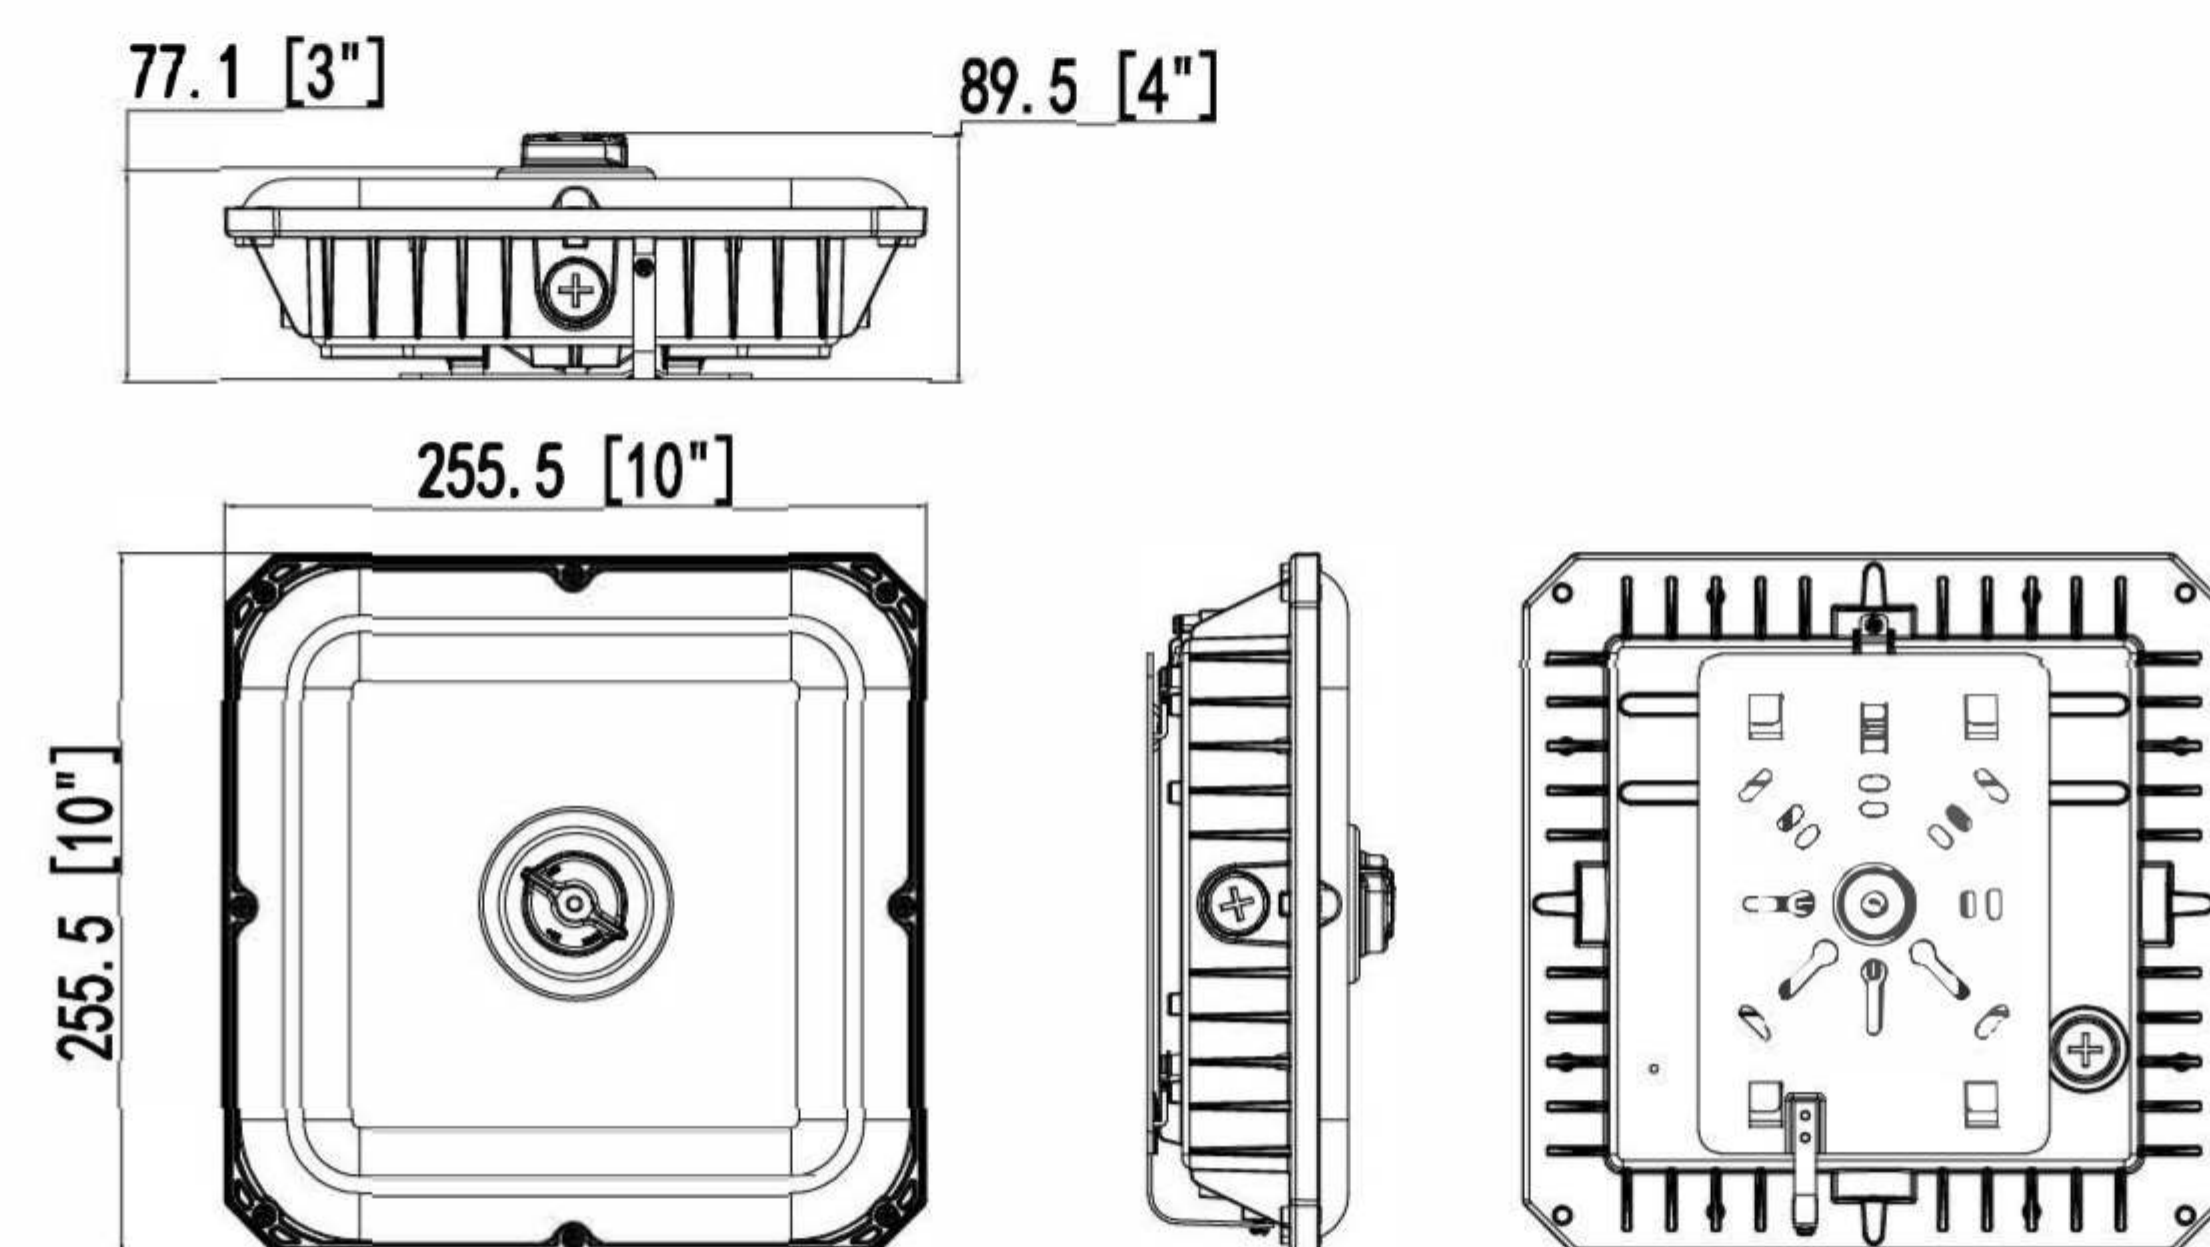

I USAGE SCENARIO



CIRCULAR LED CANOPY LIGHT

Key Features:




- 135lm/W
- UGR<28
- 0-10V dimming
- UL cUL DLC 5.1 Premium listed.
- Aluminum housing and Low glare
- UV resistant polycarbonate lens
- Pendant and surface mount



I SPECIFICATION

Model No	Power	Voltage	CCT	CRI	Lumens
ML-CNPE-60/40/20W	60/40/20W	AC120-277V / AC120-347V	3000K,4000K,5000K,5700K	Ra>80	135lm/w
ML-CNPE-80/60/40W	80/60/40W		3000K,4000K,5000K,5700K	Ra>80	135lm/w
ML-CNPE-100/80/60W	100/80/60W		3000K,4000K,5000K,5700K	Ra>80	135lm/w

I DIMENSIONS

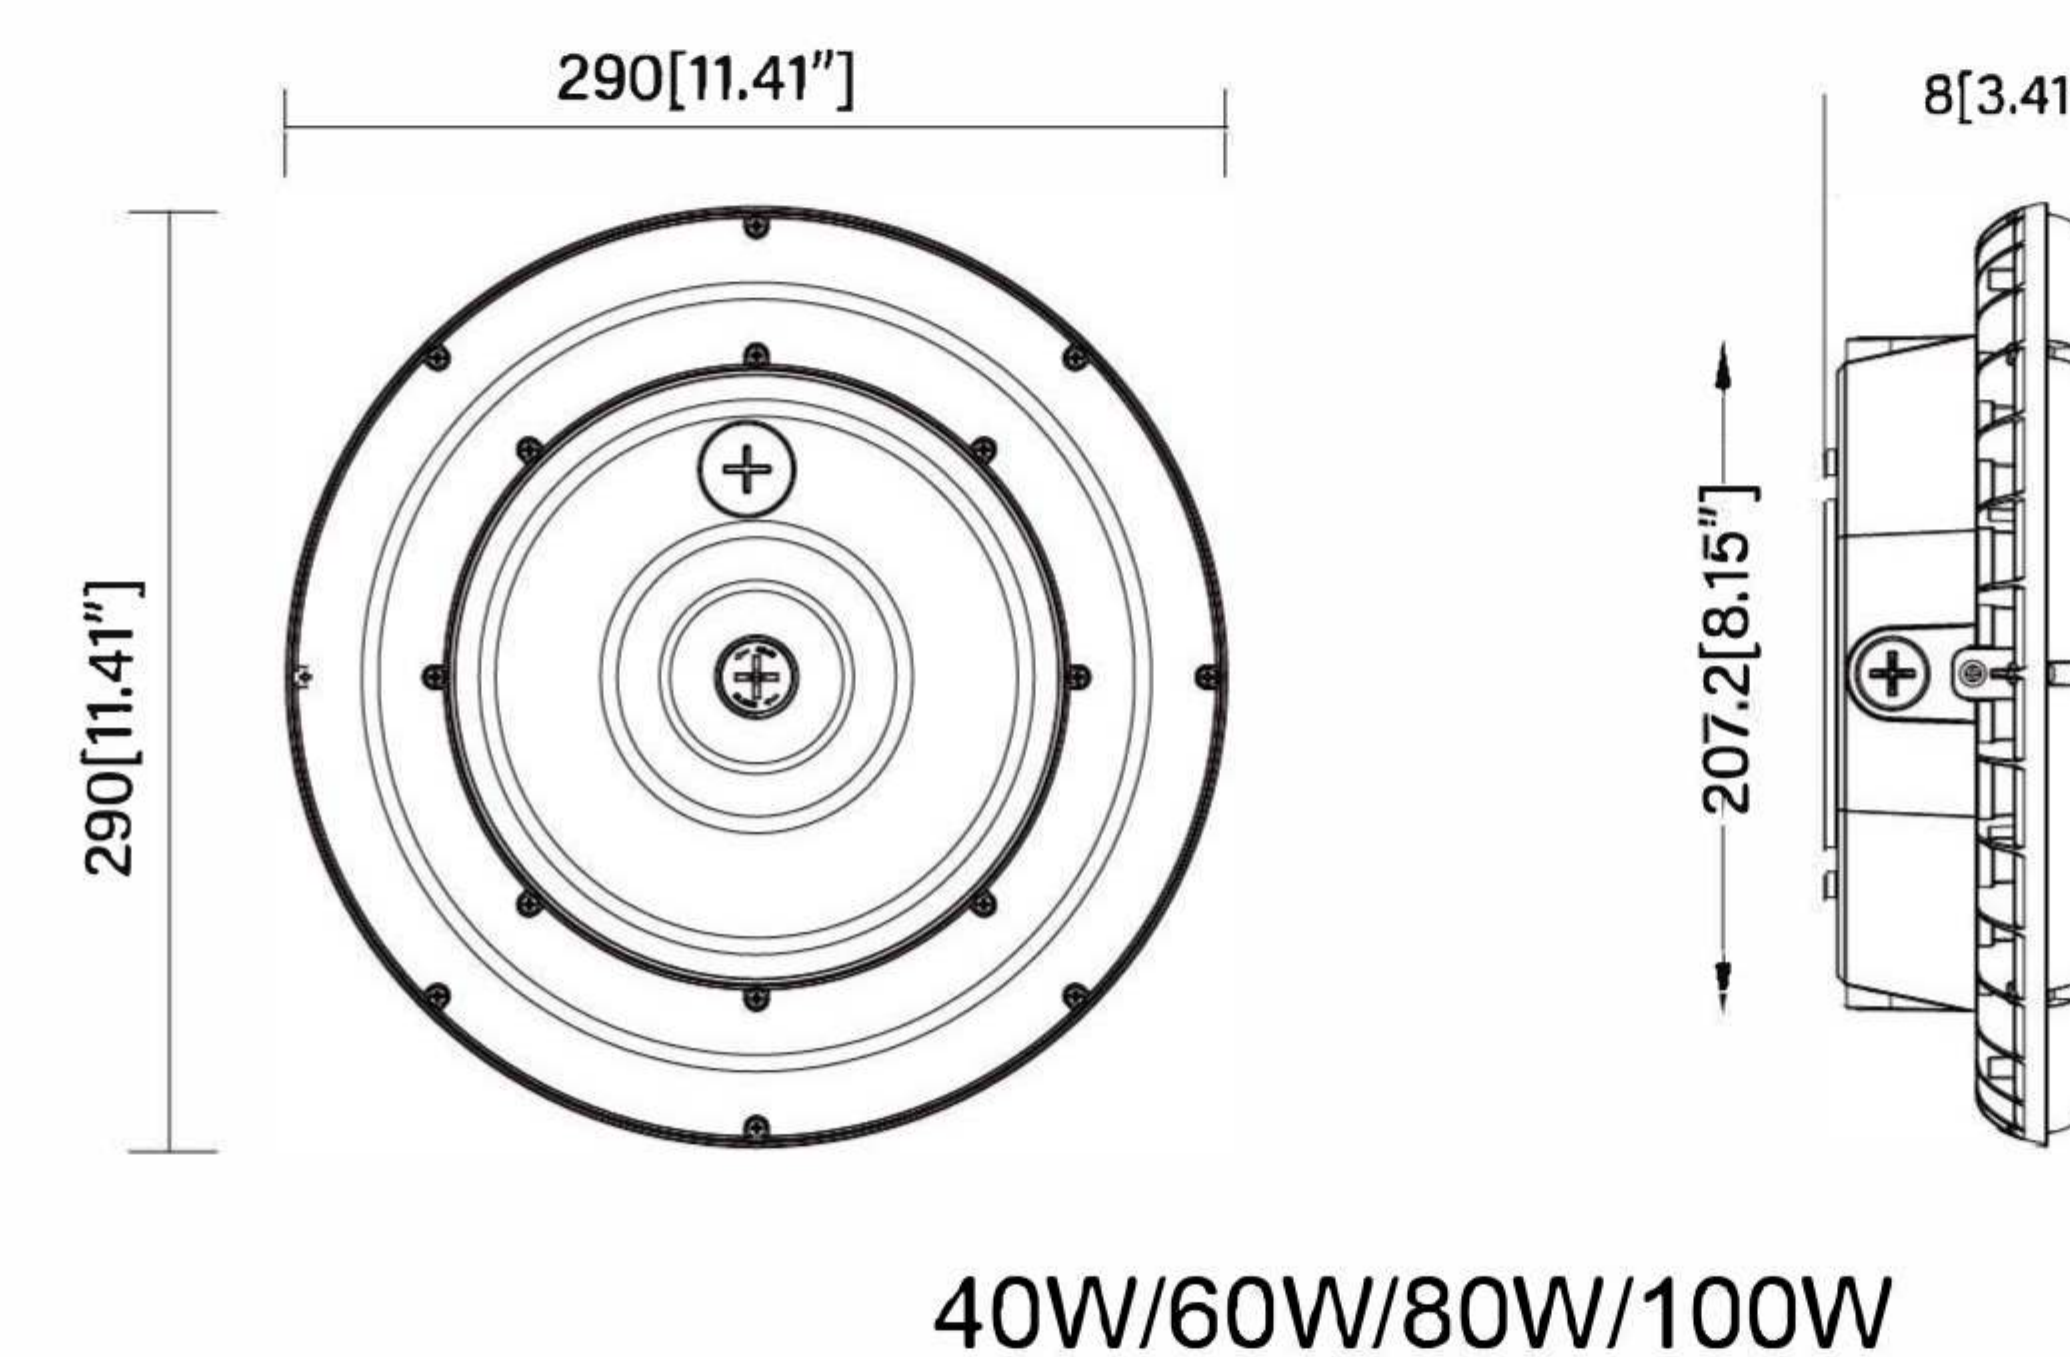

40W/60W/80W/100W

I ADDITIONAL ACCESSORY



Microwave Motion Sensor



Microwave Motion Sensor (Zhaga)



PIR Sensor

CANOPY LIGHT / CNPF 55W

Key Features:





- High performance LED fixture
- 0-10V dimming
- Compact LED fixture
- High Brightness,150lm/w
- 5-Years warranty



SPECIFICATION


Model No	Power	Voltage	CCT	CRI	Lumens
CNPF-30W	30W	120-277/347VAC	3000K,4000K,5000K,5700K	RA>70	150LM/W
CNPF-40W	40W	120-277/347VAC	3000K,4000K,5000K,5700K	RA>70	150LM/W
CNPF-55W	55W	120-277/347VAC	3000K,4000K,5000K,5700K	RA>70	150LM/W

DIMENSIONS

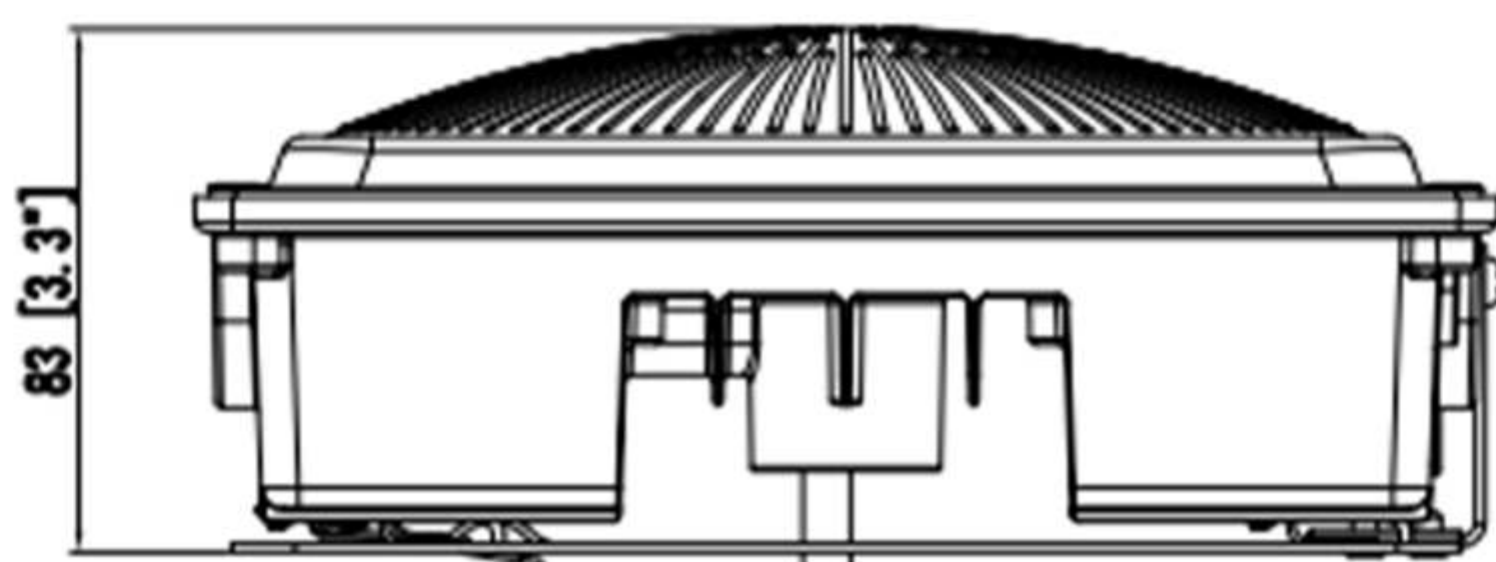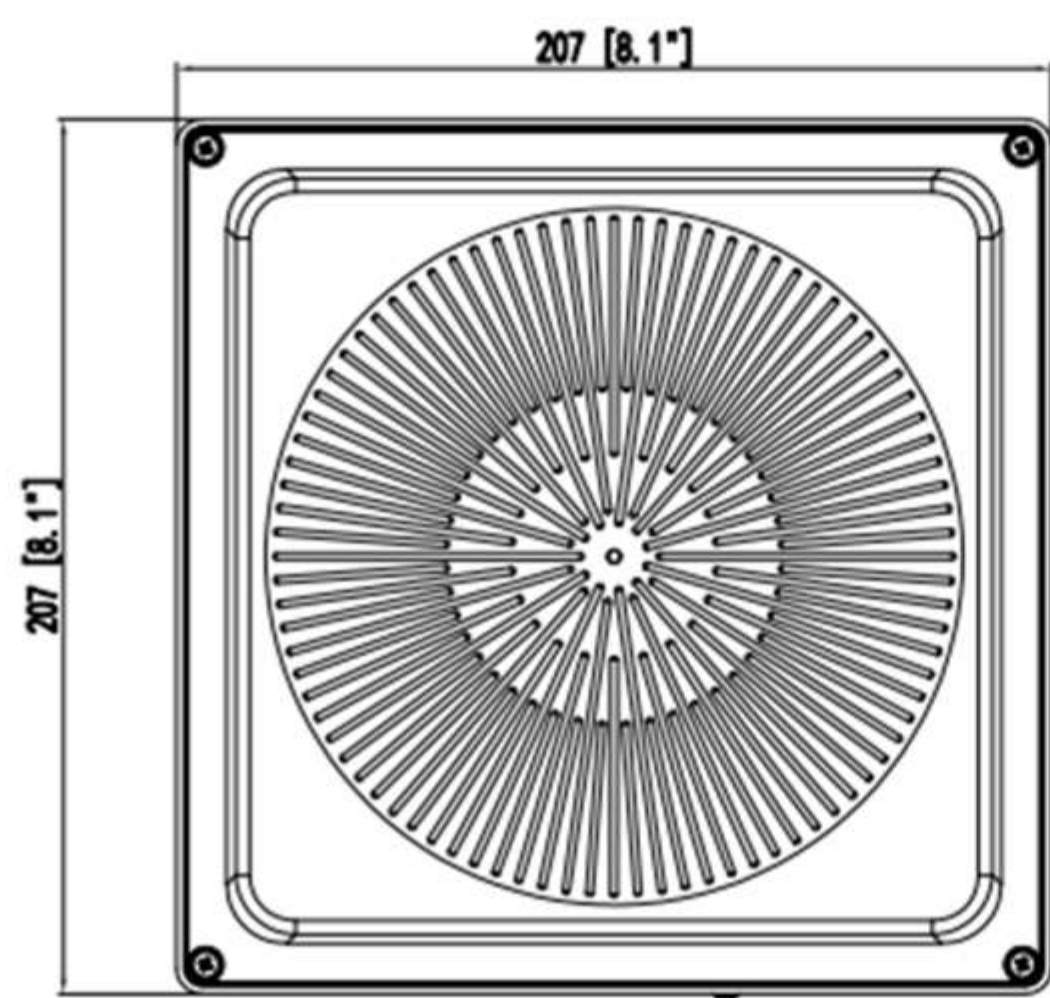

3-LEVEL ADJUSTABLE CCT


1.Open The Button

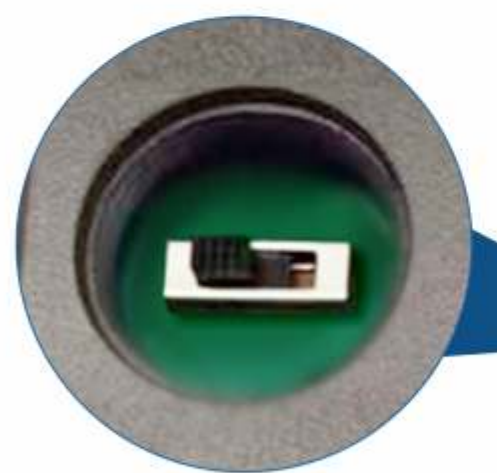

2.Toggle The Switch to Adjust



0-10V DIMMING

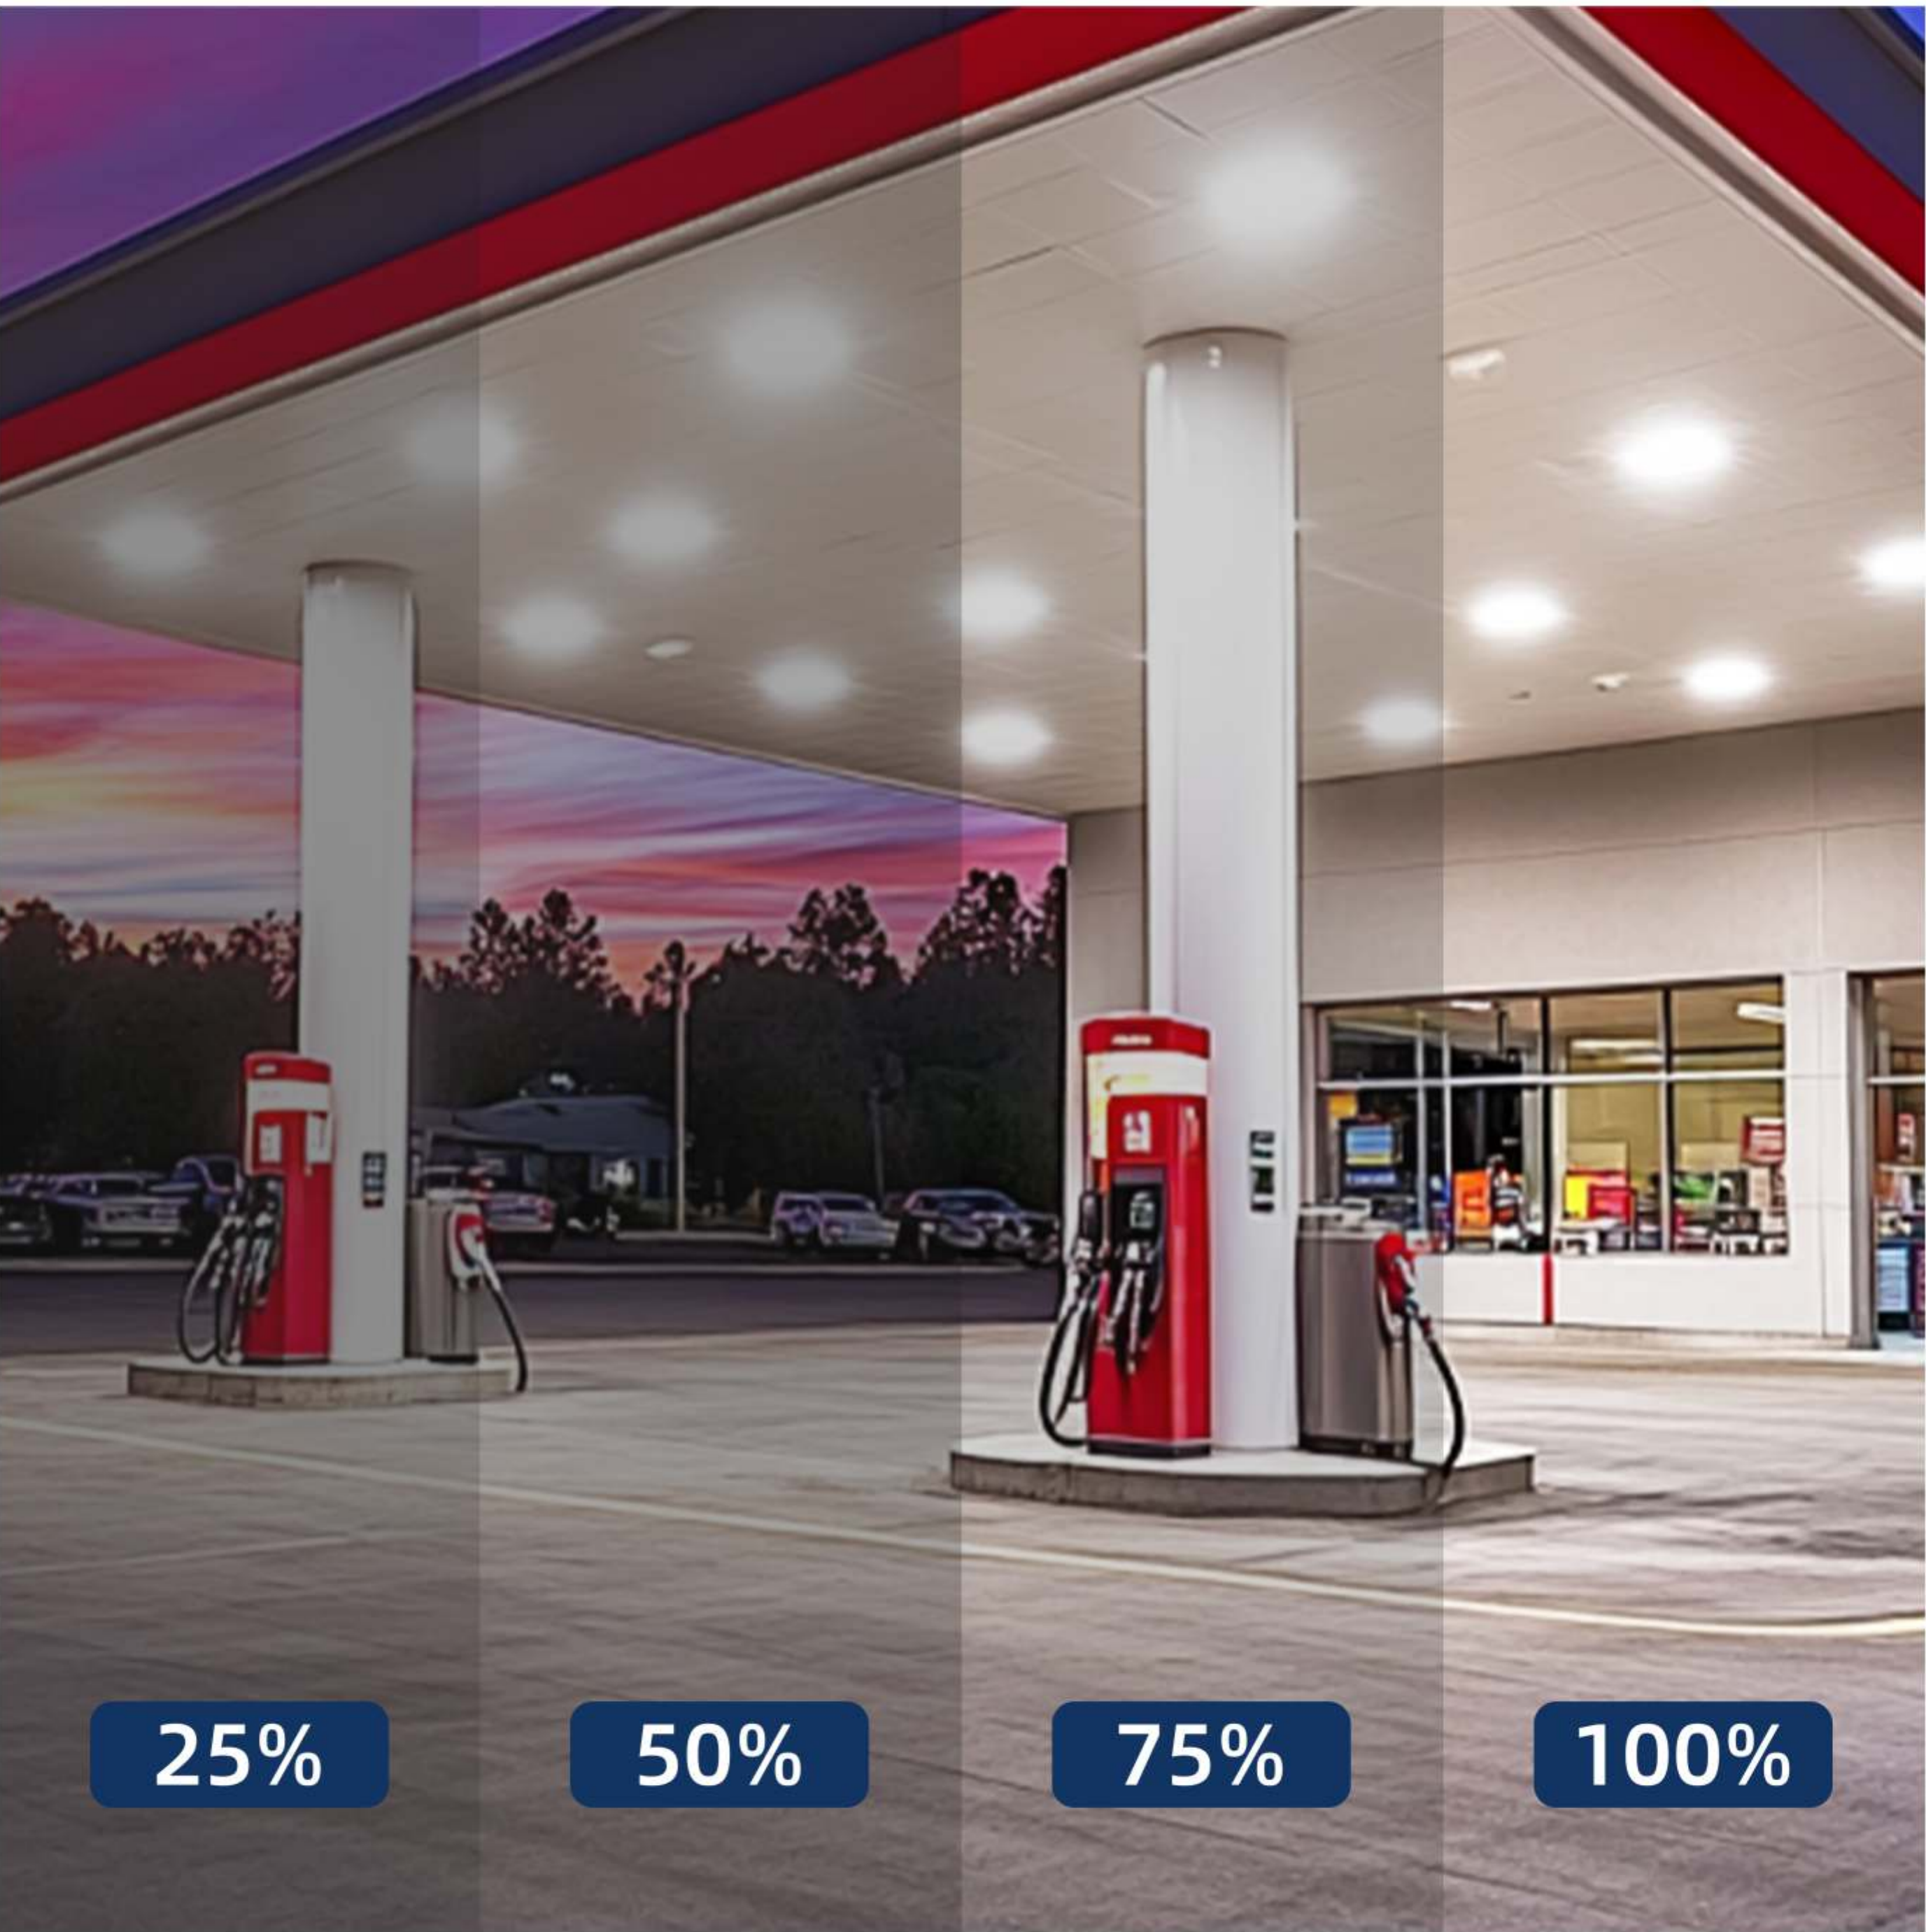

Adjust the brightness

Save electricity bills

Eco-friendly concept

PRODUCT QUALITY

IP65 rating for outdoor usage



Light Decay<5%



BARN LIGHT /YDA 42W

Key Features:




- Heavy-duty Cast Aluminum Housing
- High performance LED fixture 150LM/W
- Multiple application scenarios
- With Photocell
- Three Years Warranty




I SPECIFICATION

Model No	Power	Voltage	CCT	IP Rated	CRI	Lumens
YDA-42W	42W	120VAC	3000K,4000K,5000K,5700K	IP 65	RA>70	150LM/W

I DIMENSIONS

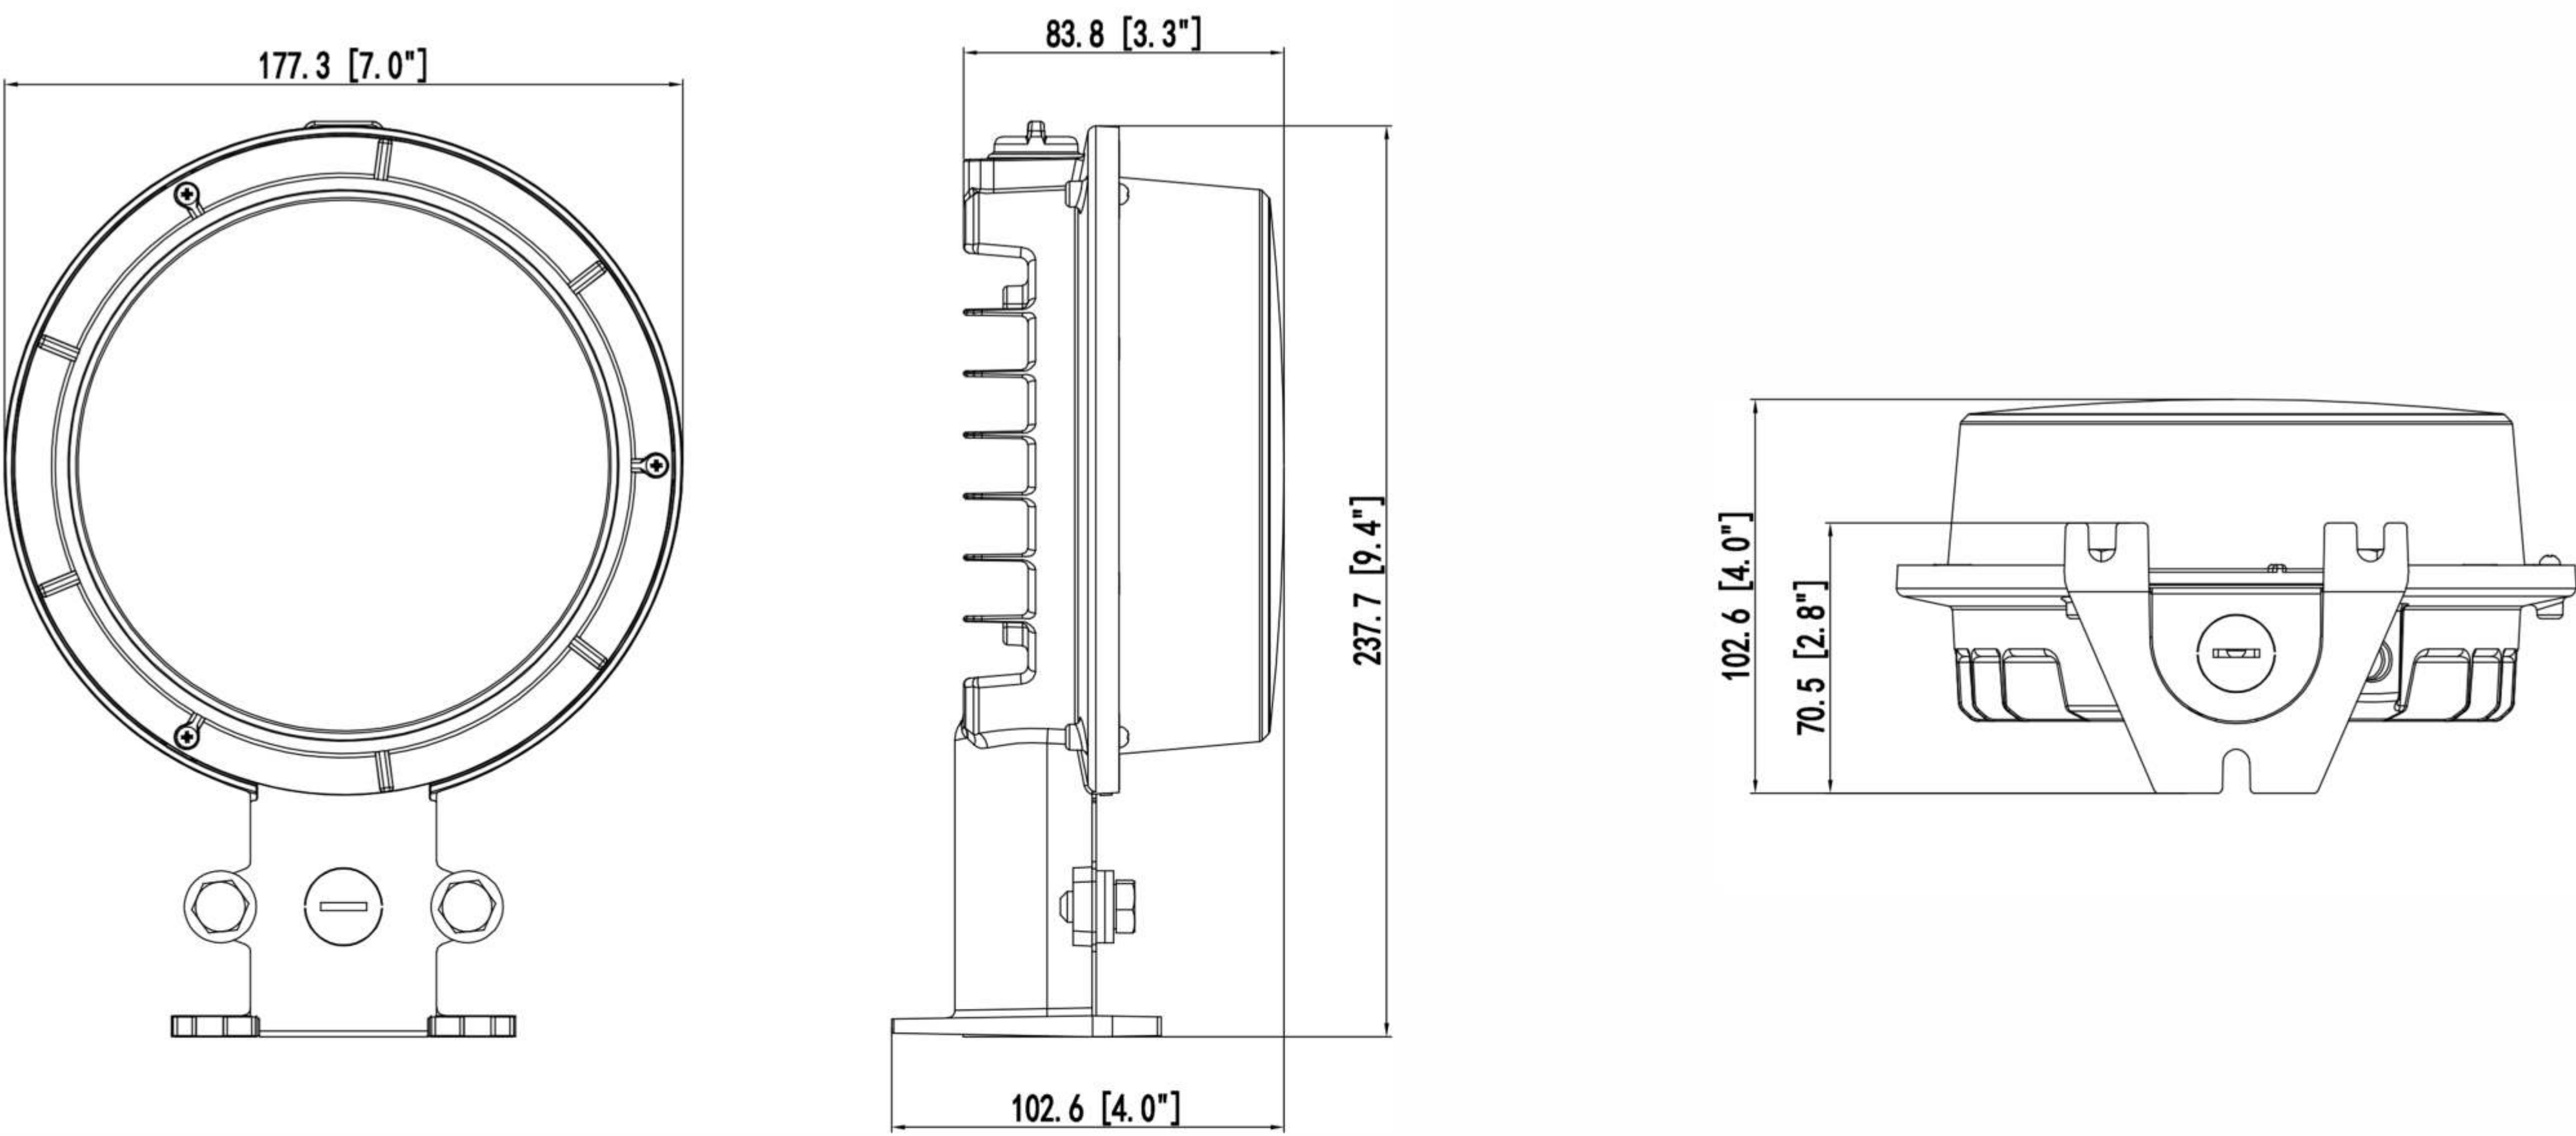

I FUNCTION OPTIONS

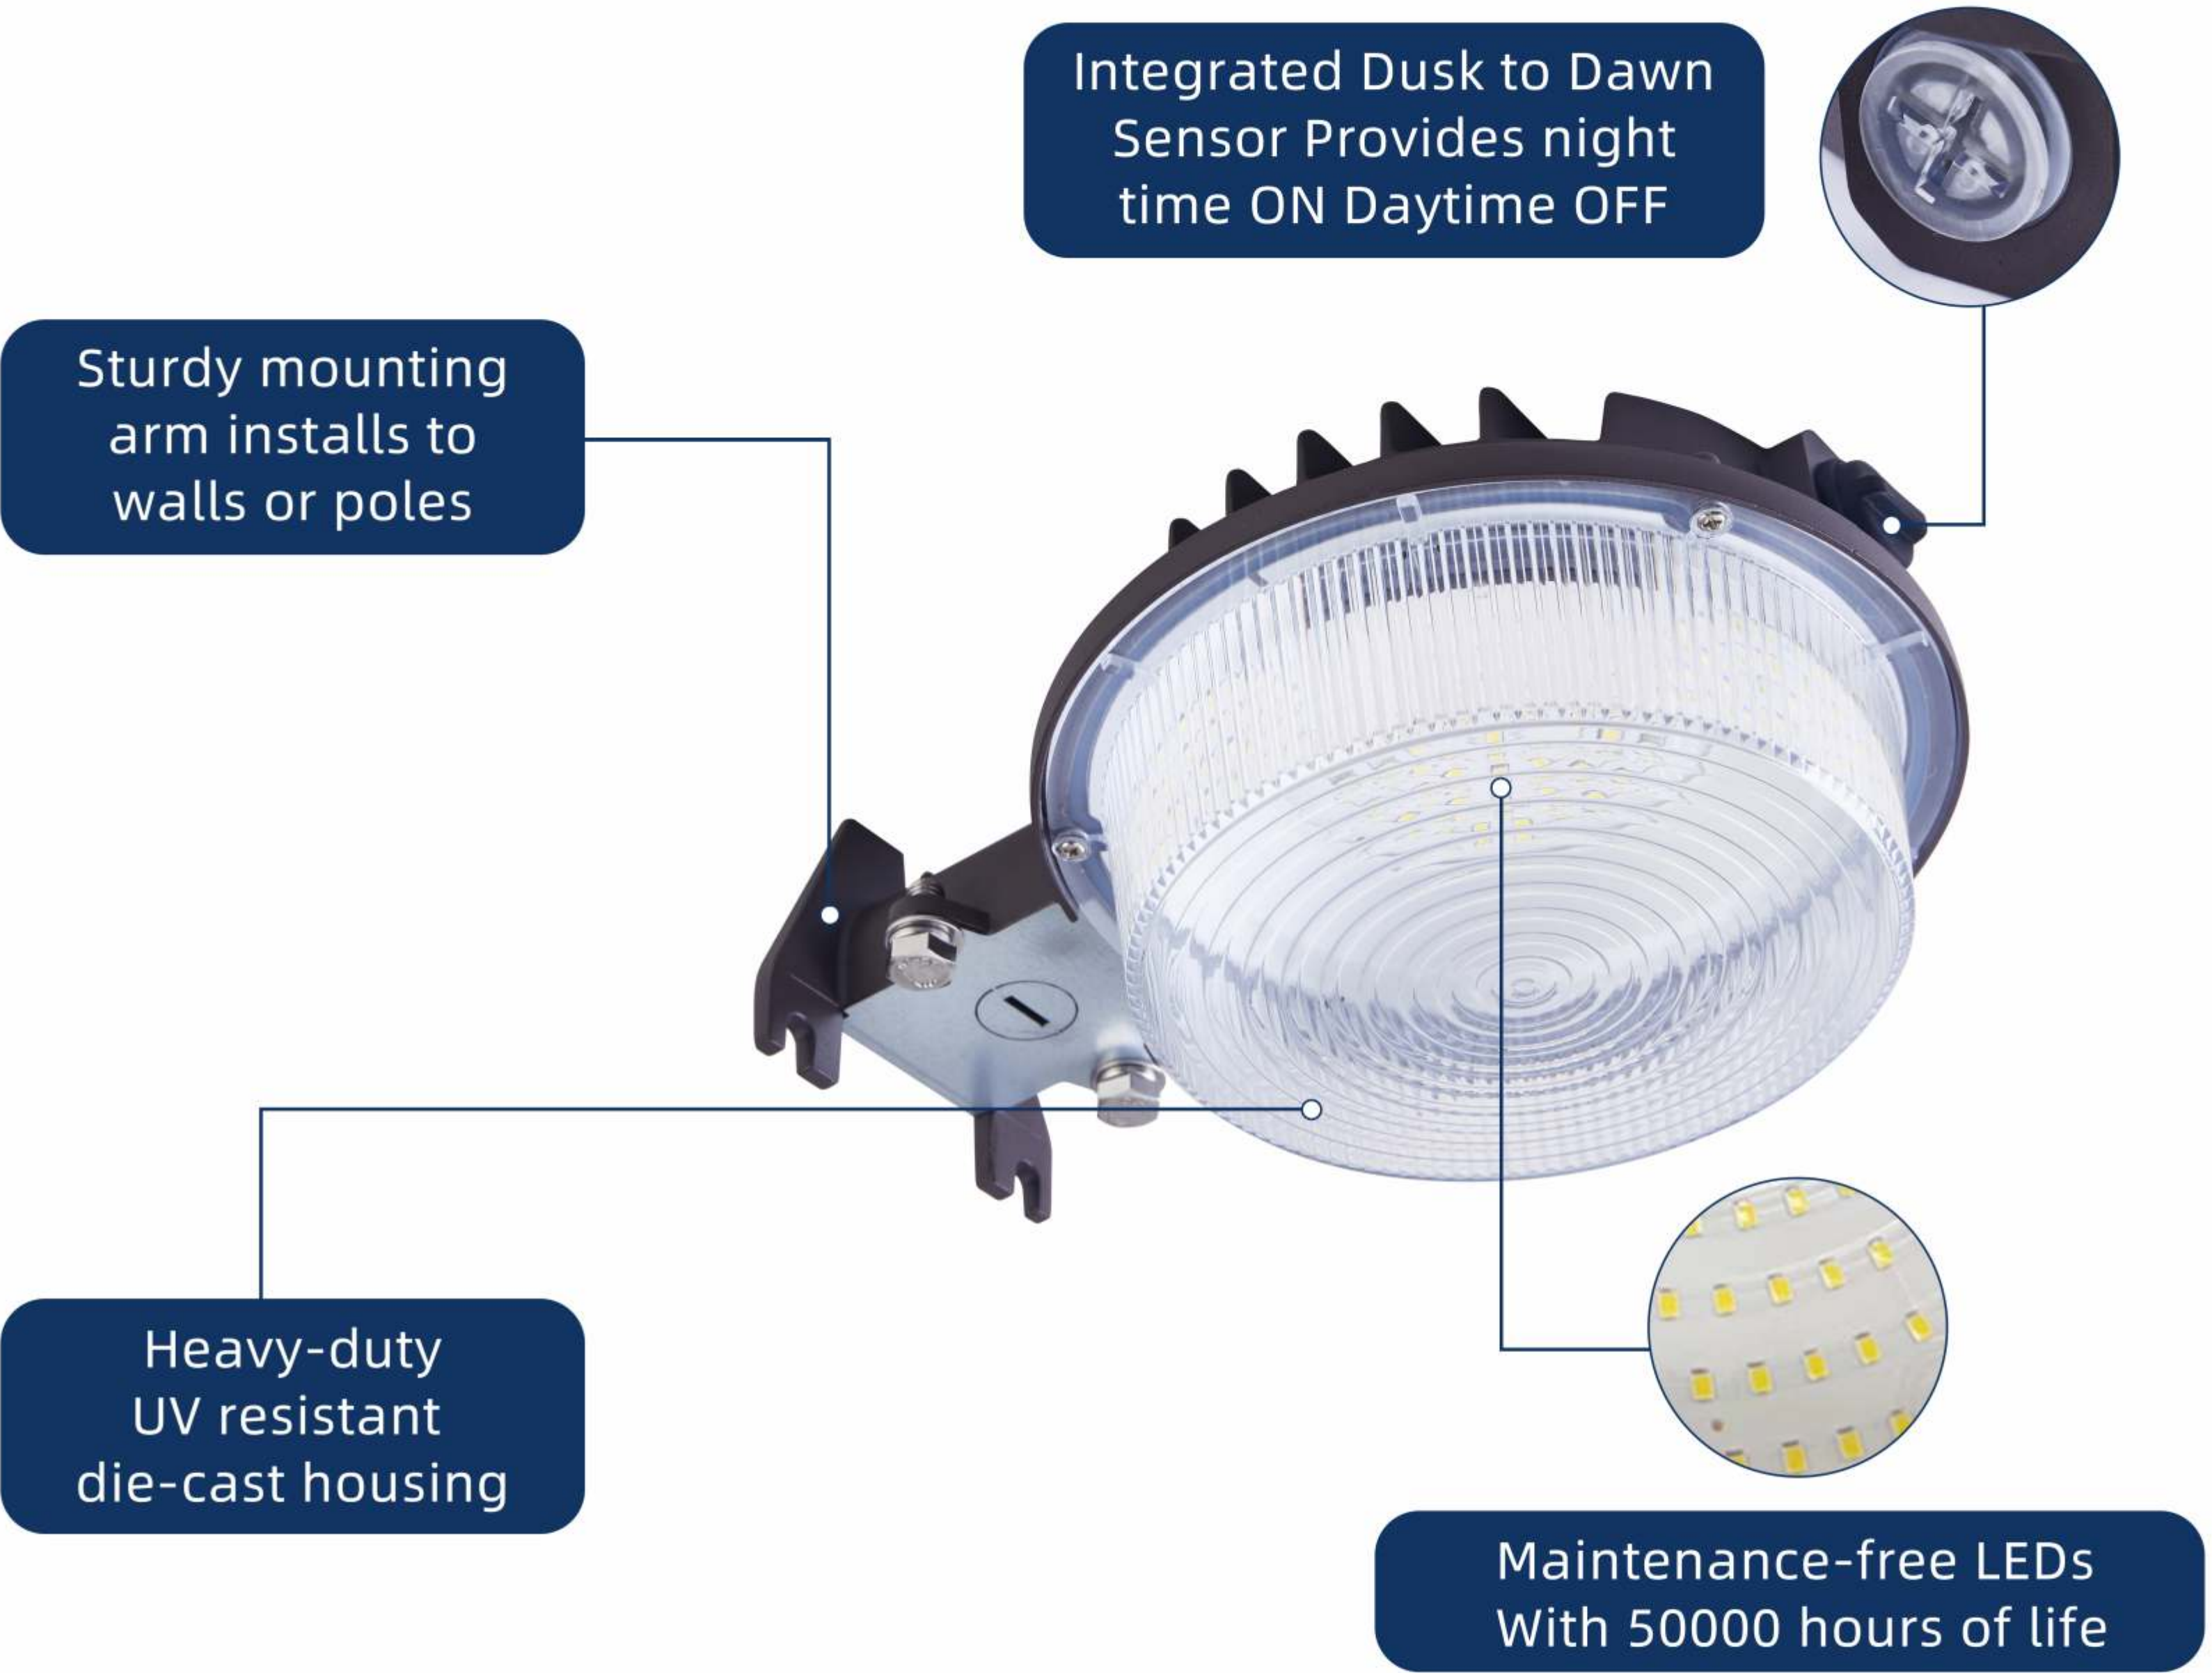

I USAGE SCENARIO



LINEAR HIGH BAY LIGHT / LHB01 100-400W

Key Features:


- Photocell selectable, Smart Sensor
- Compact fixture, saving shipping cost
- 0-90° Foldable light, adjusting light angle
- DLC ETL listed
- 5-Years warranty



SPECIFICATION

Model No	Power	Voltage	CCT	CRI	Lumens
LHB01-150/120/100W	150/120/100W	100-277/347VAC	3000K,4000K,5000K,5700K	RA>70	150LM/W
LHB01-210/160/120W	210/160/120W	100-277/347VAC	3000K,4000K,5000K,5700K	RA>70	150LM/W
LHB01-300/240/200W	300/240/200W	100-277/347VAC	3000K,4000K,5000K,5700K	RA>70	150LM/W
LHB01-400/320/250W	400/320/250W	100-277/347VAC	3000K,4000K,5000K,5700K	RA>70	150LM/W

FOLDABLE

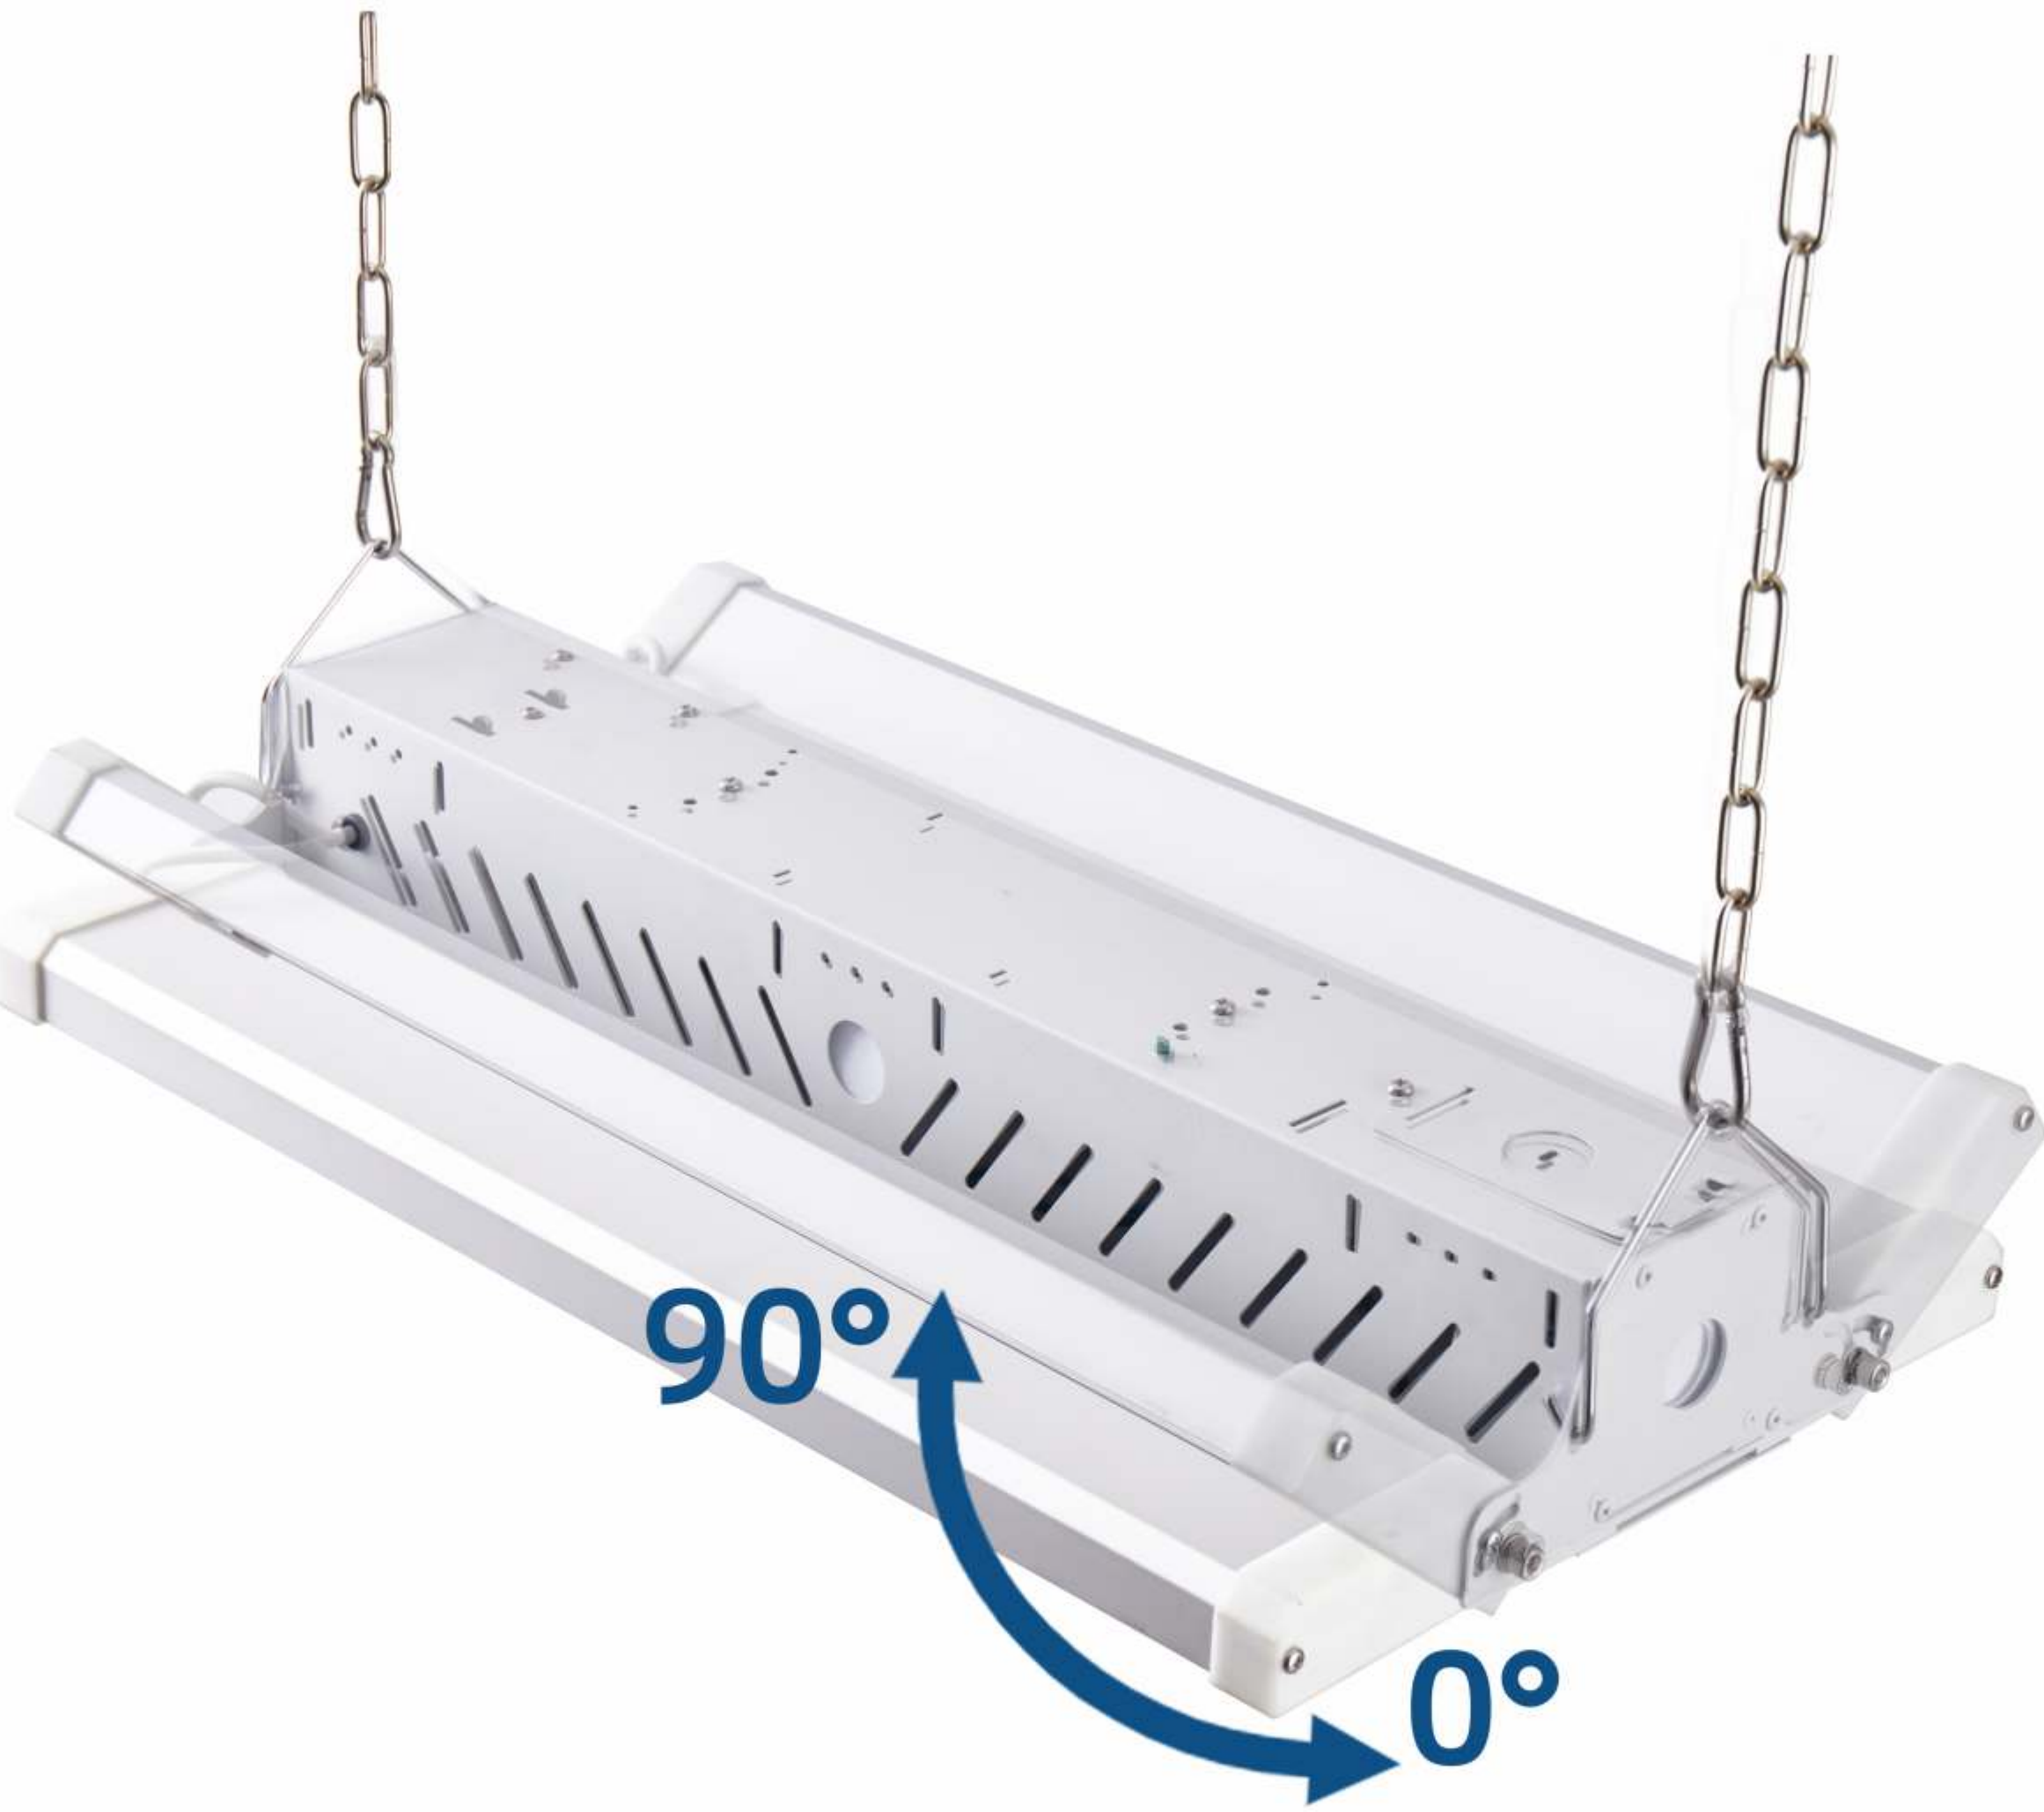

0°




10-80°



90°

DIMENSIONS

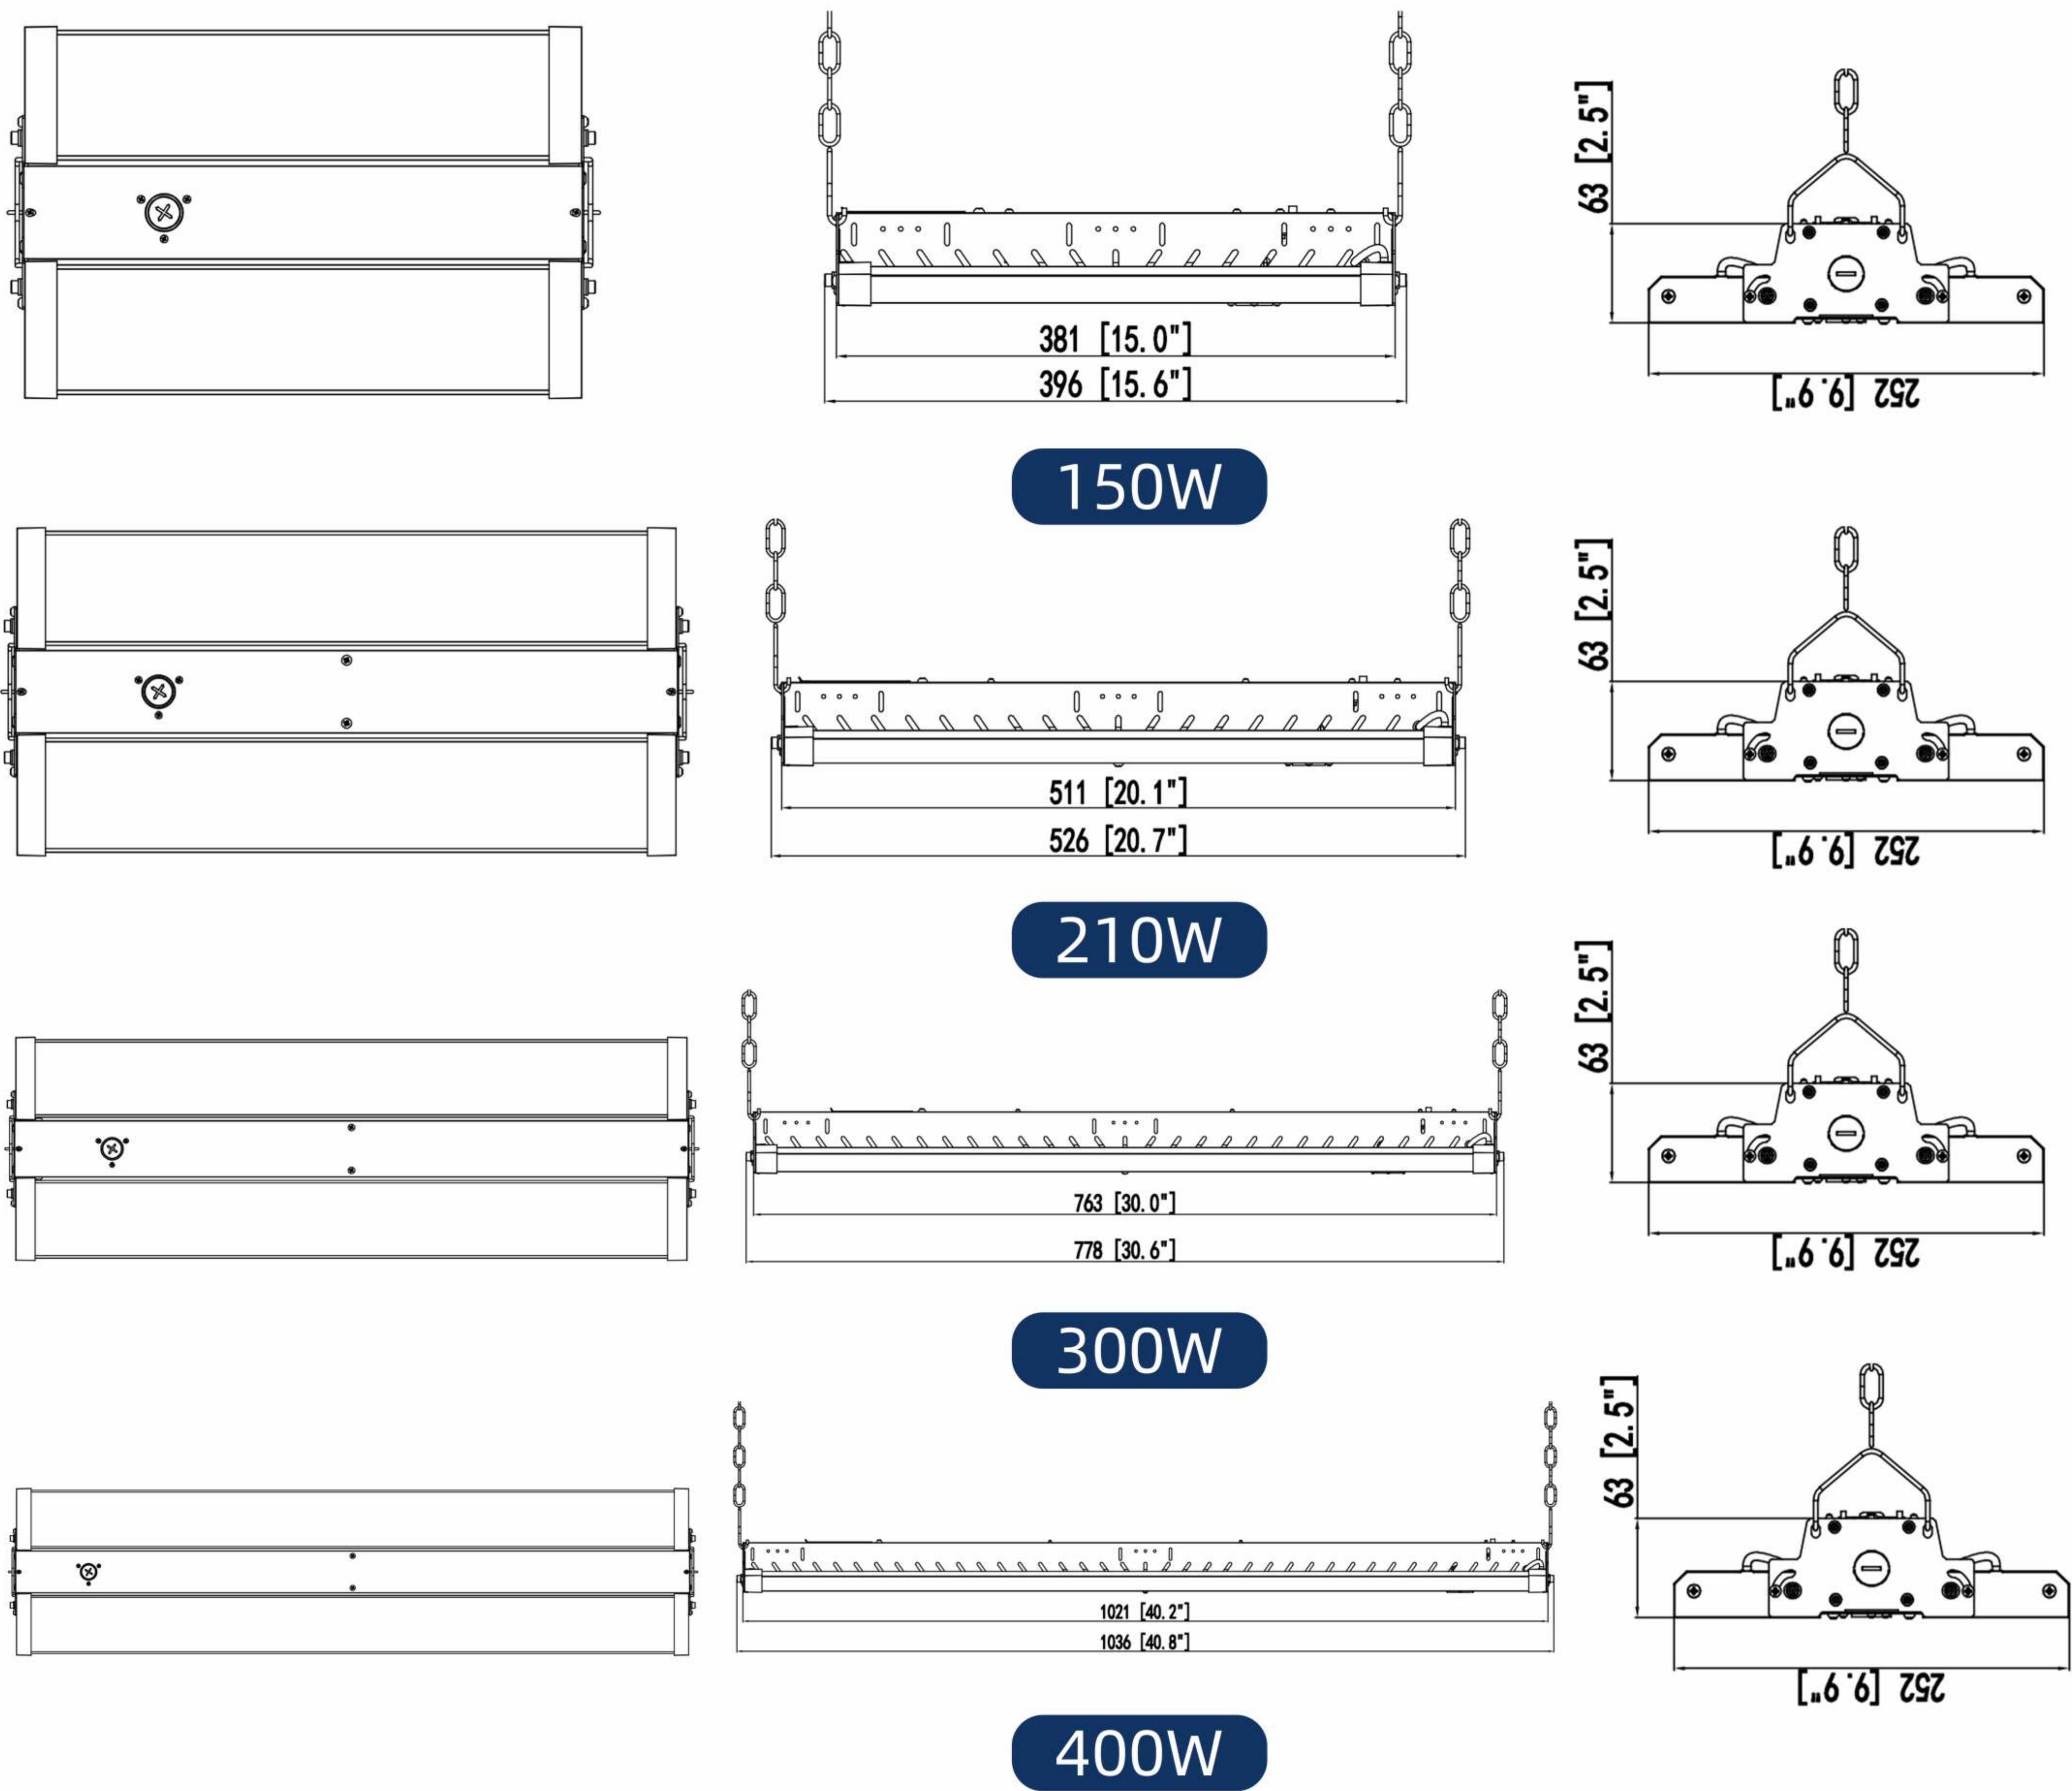

STRUCTURE



I USAGE SCENARIO




I 3Power & 3CCT

Temperature adjustable
suitable for a variety of
environments



I ADJUSTABLE

PRECISION 0-10V

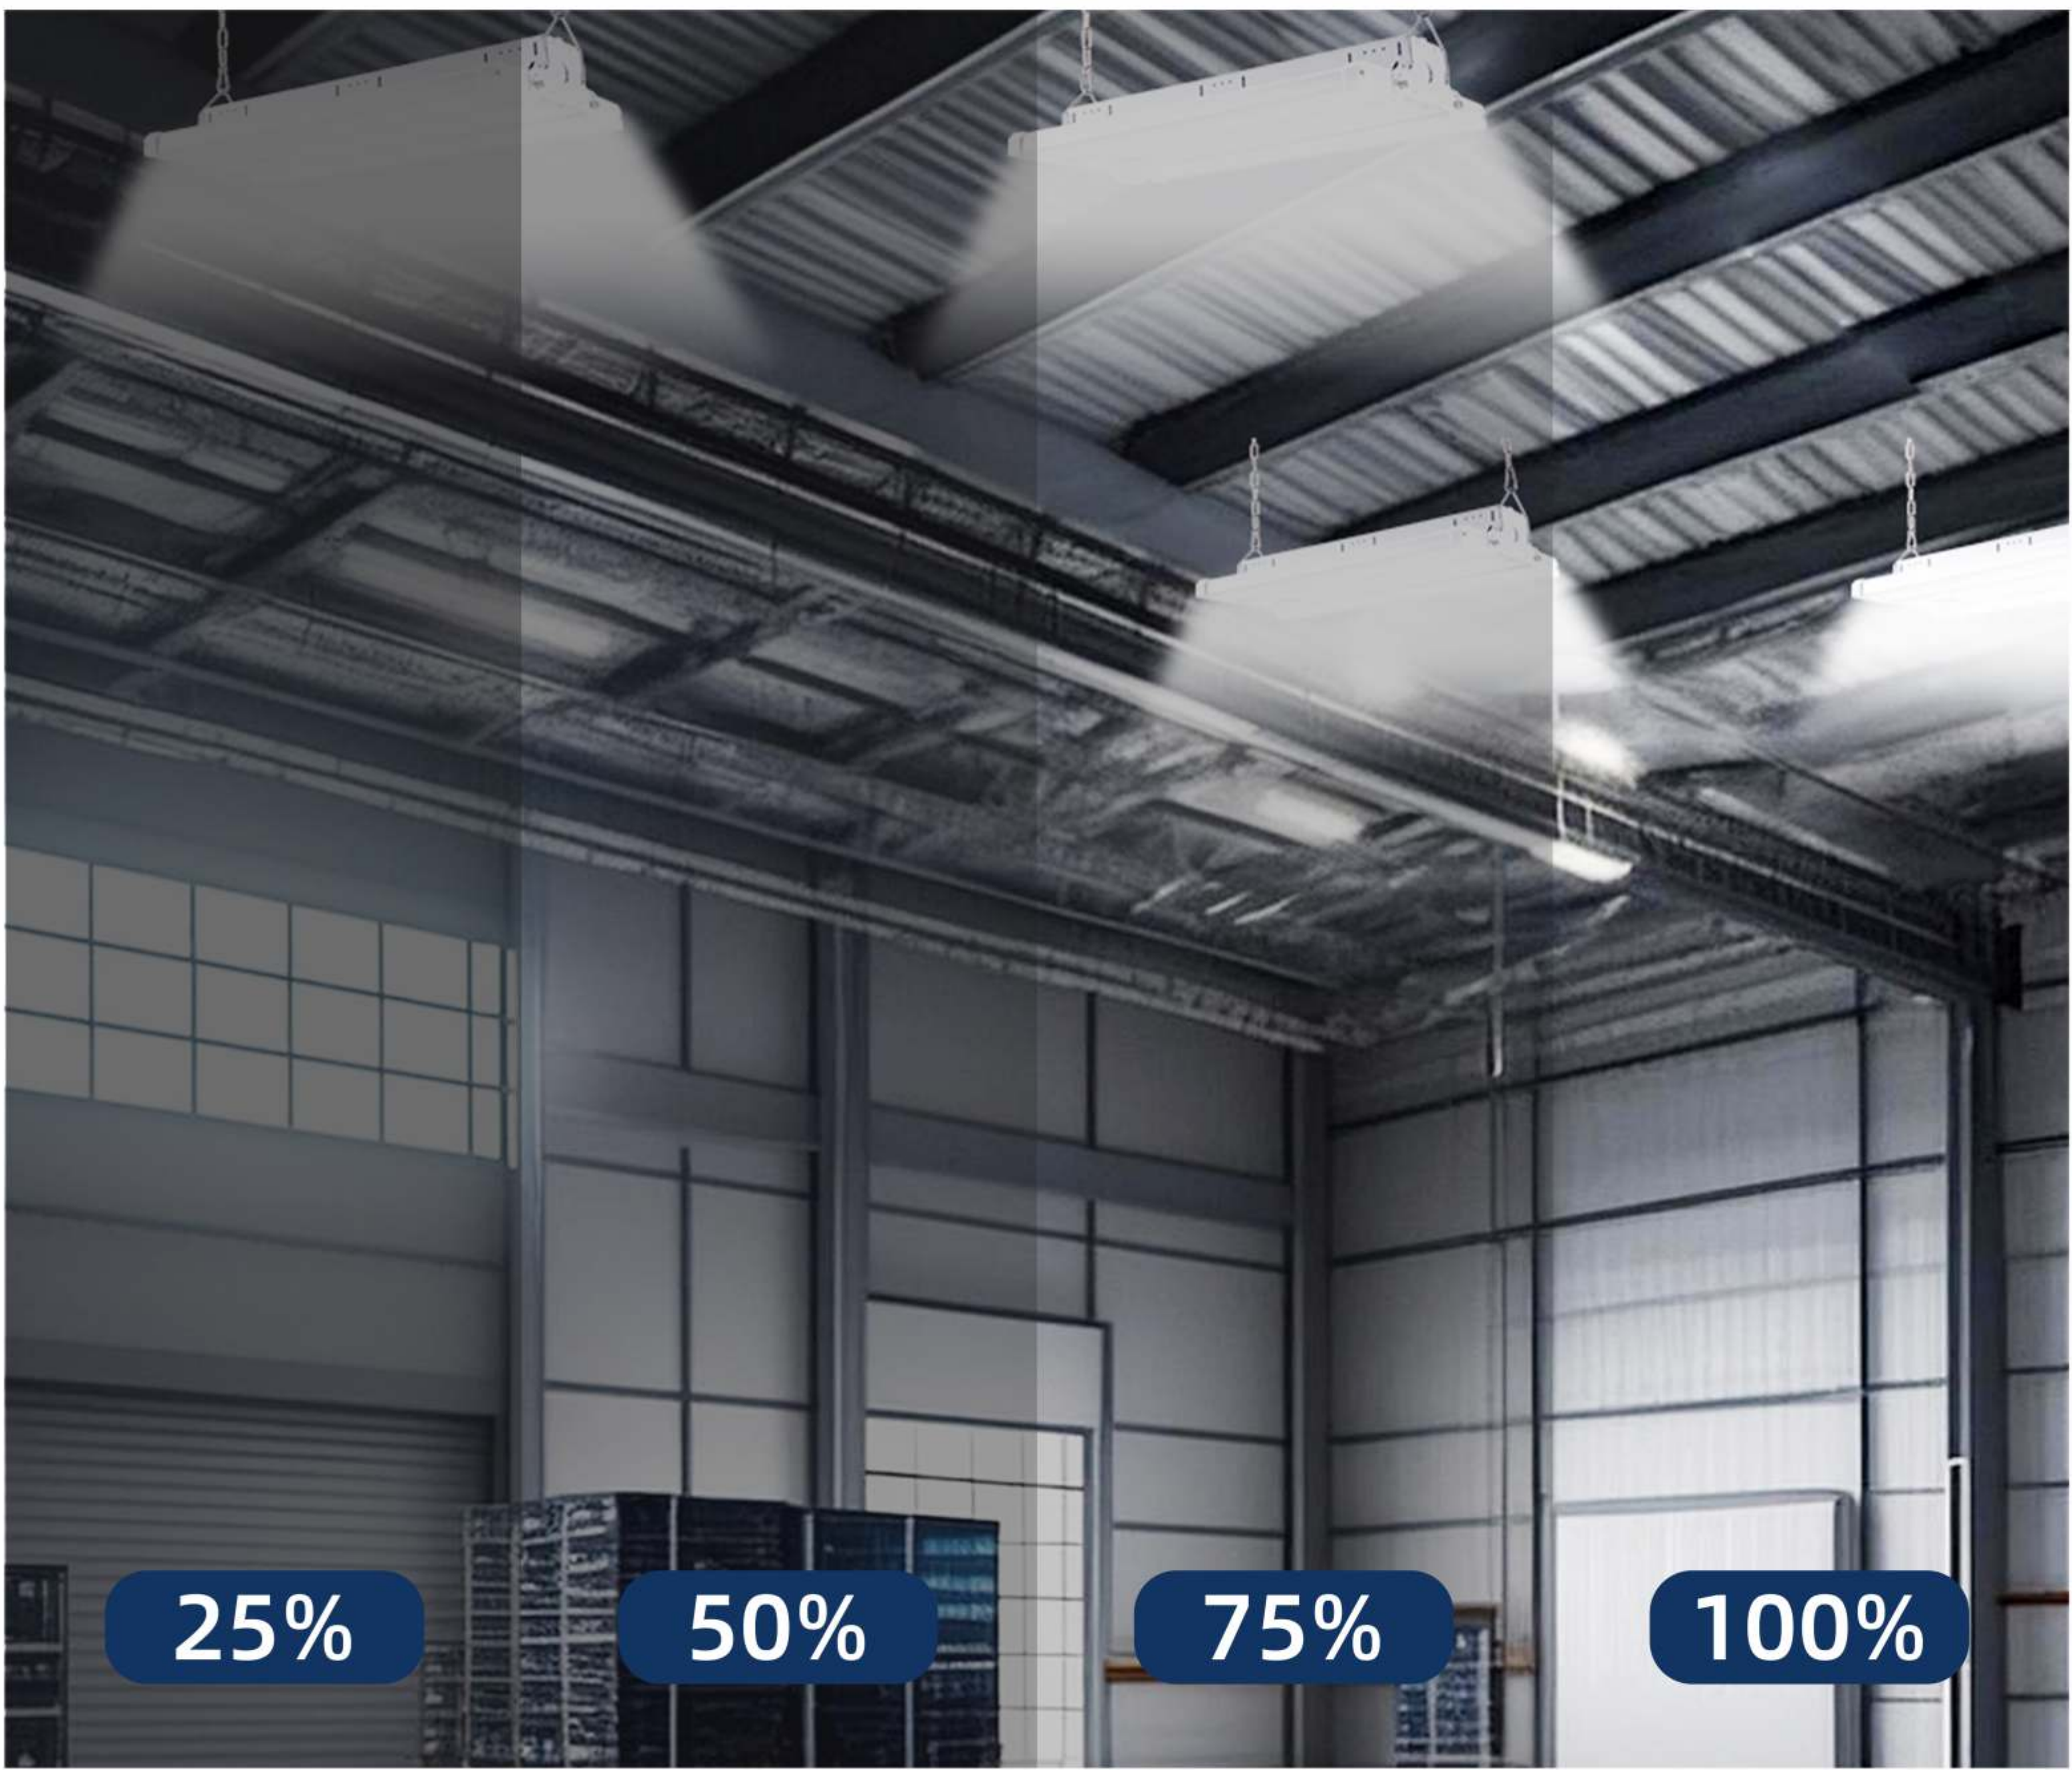

Adjust the
brightness

Save
electricity bills

Eco-friendly
concept

I SENSOR

SENSOR-EQUIPPED 30% ENERGY SAVINGS



LED Highbay Stadium Light



Key Features:


- 140lm/W
- 0-10V dimming
- UL cUL DLC 5.1Premium listed
- Die-cast aluminum housing with powder coat finish
- UV stabilized polycarbonate lens




I SPECIFICATION

Model No	Power	Voltage	CCT	CRI	Lumens
ML-HBS-300W	300W	100-277Vac 277-480ac	3000K,4000K,5000K,5700K	Ra>70	140lm/w
ML-HBS-400W	400W		3000K,4000K,5000K,5700K	Ra>70	140lm/w
ML-HBS-500W	500W		3000K,4000K,5000K,5700K	Ra>70	140lm/w
ML-HBS-600W	600W		3000K,4000K,5000K,5700K	Ra>70	140lm/w
ML-HBS-800W	800W		3000K,4000K,5000K,5700K	Ra>70	140lm/w
ML-HBS-1000W	1000W		3000K,4000K,5000K,5700K	Ra>70	140lm/w
ML-HBS-1200W	1200W		3000K,4000K,5000K,5700K	Ra>70	140lm/w

I DIMENSIONS

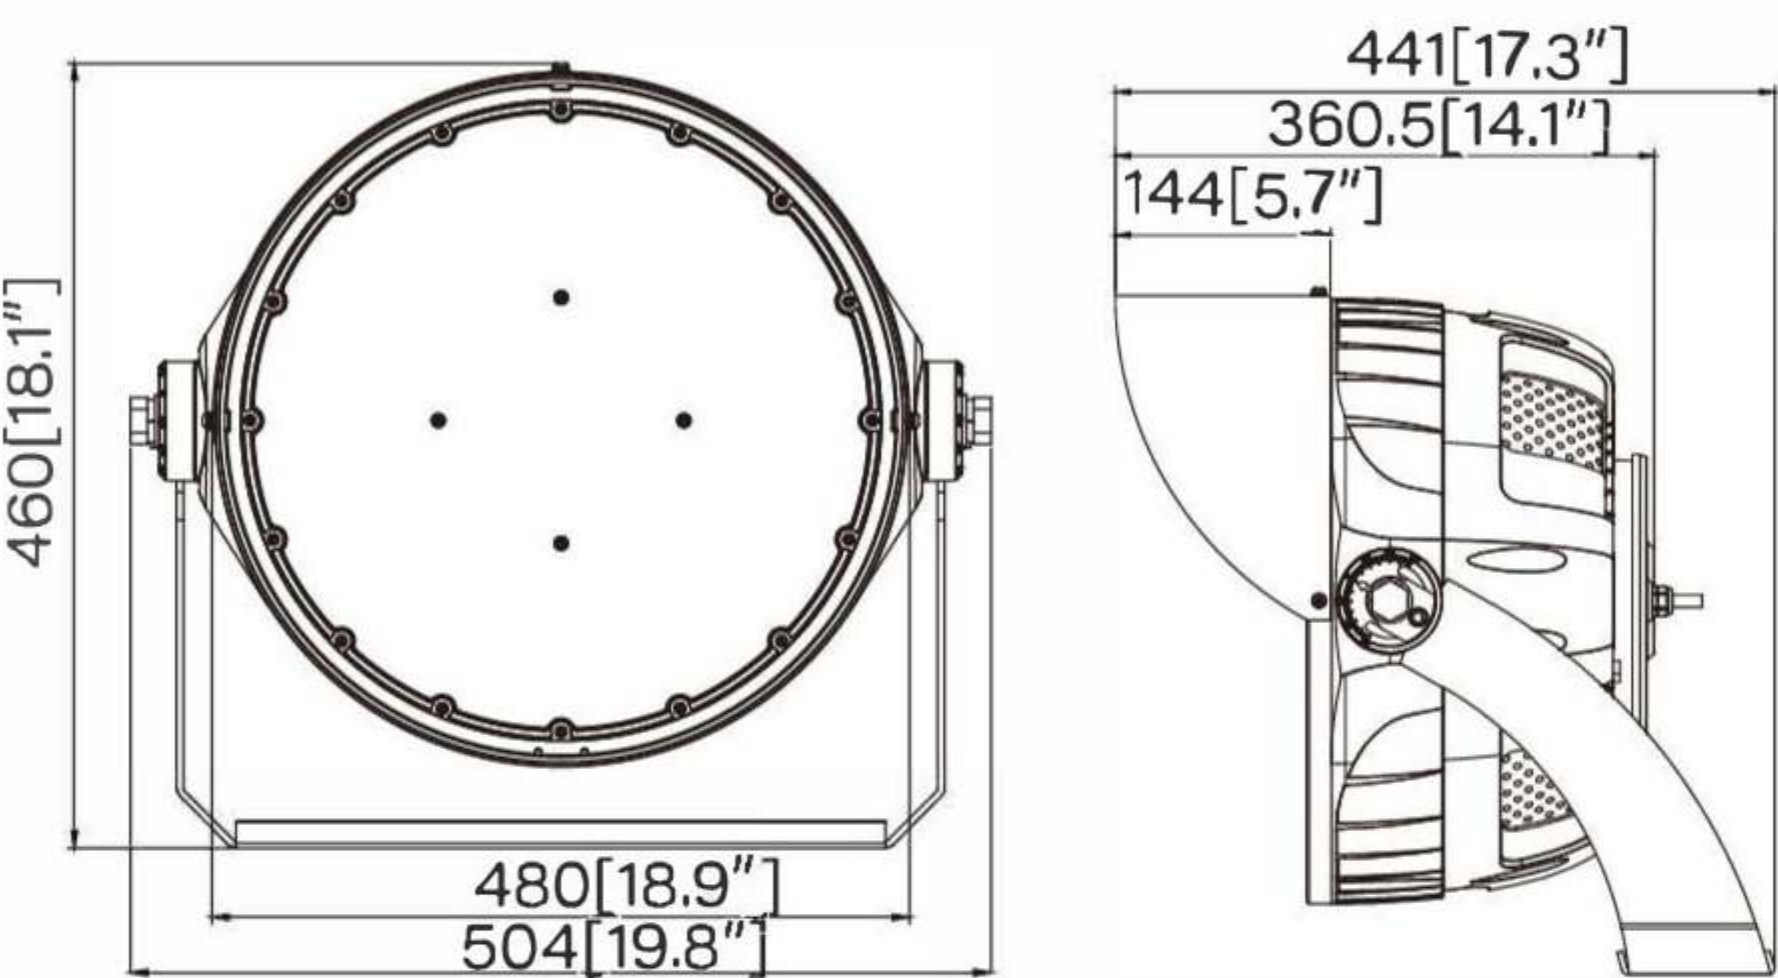

300W-600W

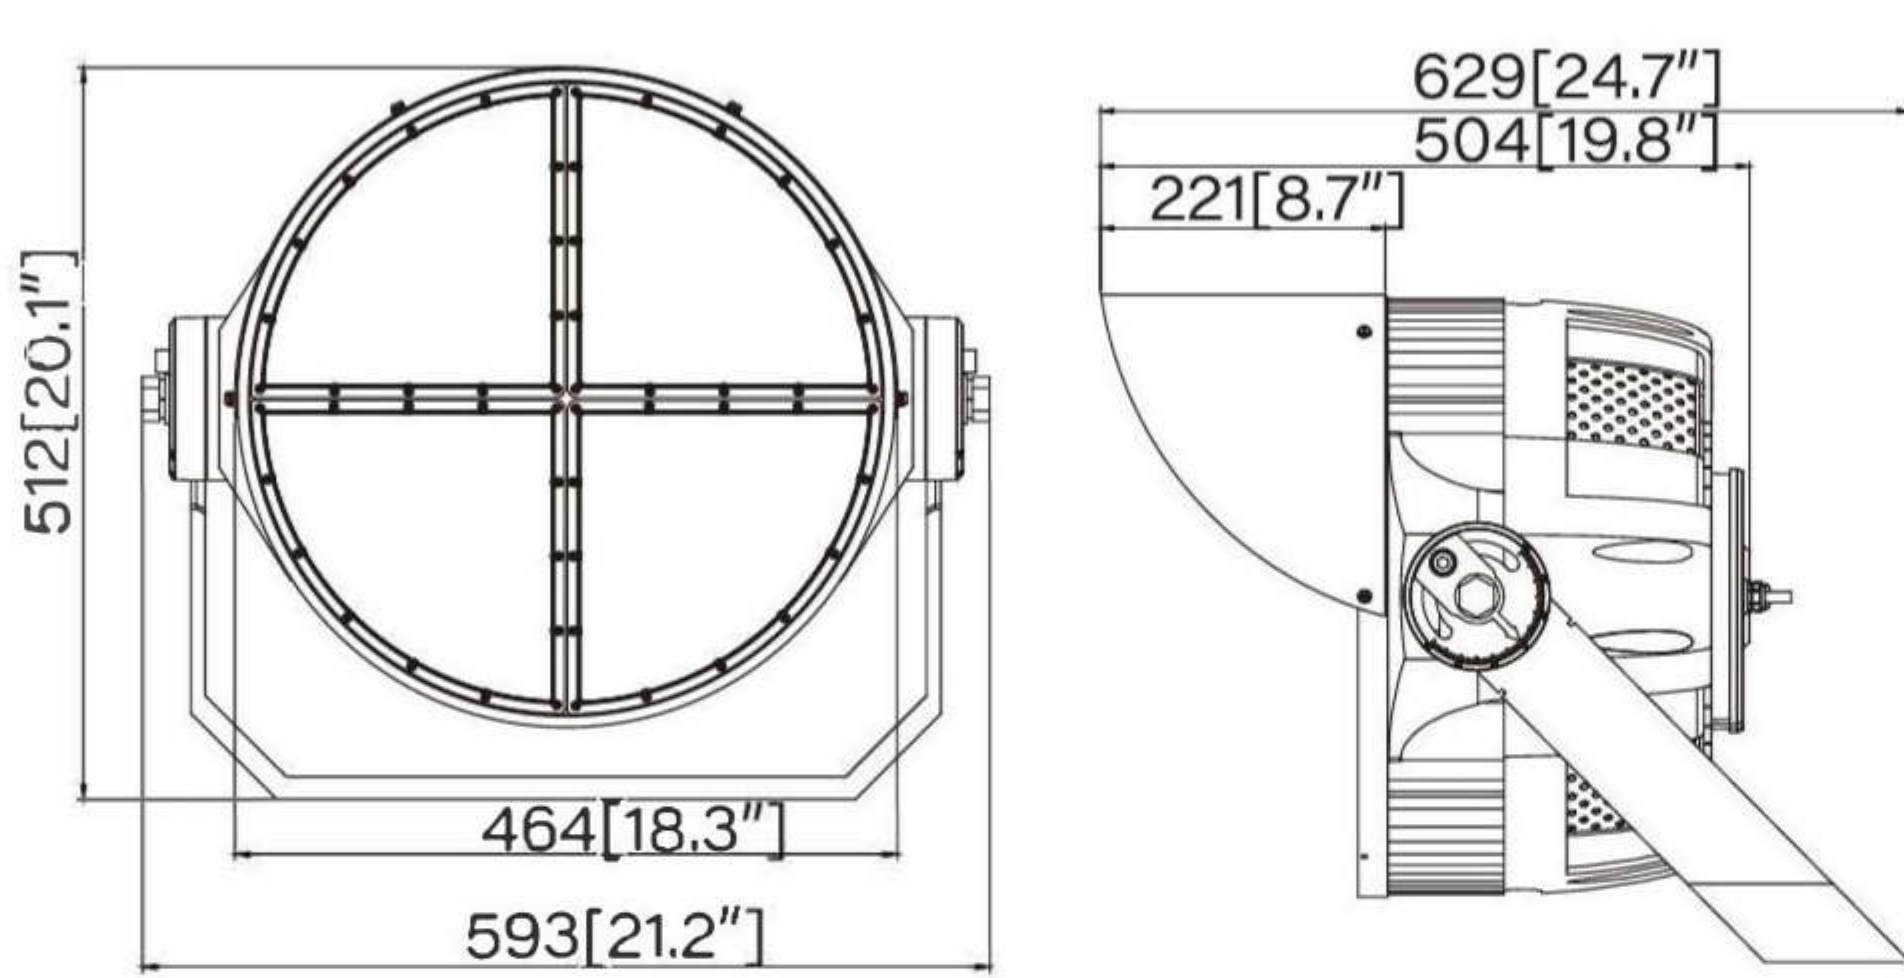

800W-1200W

I ADDITIONAL ACCESSORY



Laser

LED Stadium Light



Key Features:


- 150lm/W
- 0-10V dimming
- UL cUL DLC 5.1Premium listed
- Die-cast aluminum housing with powder coat finish
- UV stabilized polycarbonate lens



I SPECIFICATION

Model No	Power	Voltage	CCT	CRI	Lumens
ML-SPL-500W	600W	100-277Vac	3000K-4000K-5000K-5700K	Ra>80	150lm/w
ML-SPL-1200W	1200W	100-277Vac	3000K-4000K-5000K-5700K	Ra>80	150lm/w
ML-SPL-1800W	1800W	100-277Vac	3000K-4000K-5000K-5700K	Ra>80	150lm/w

I DIMENSIONS

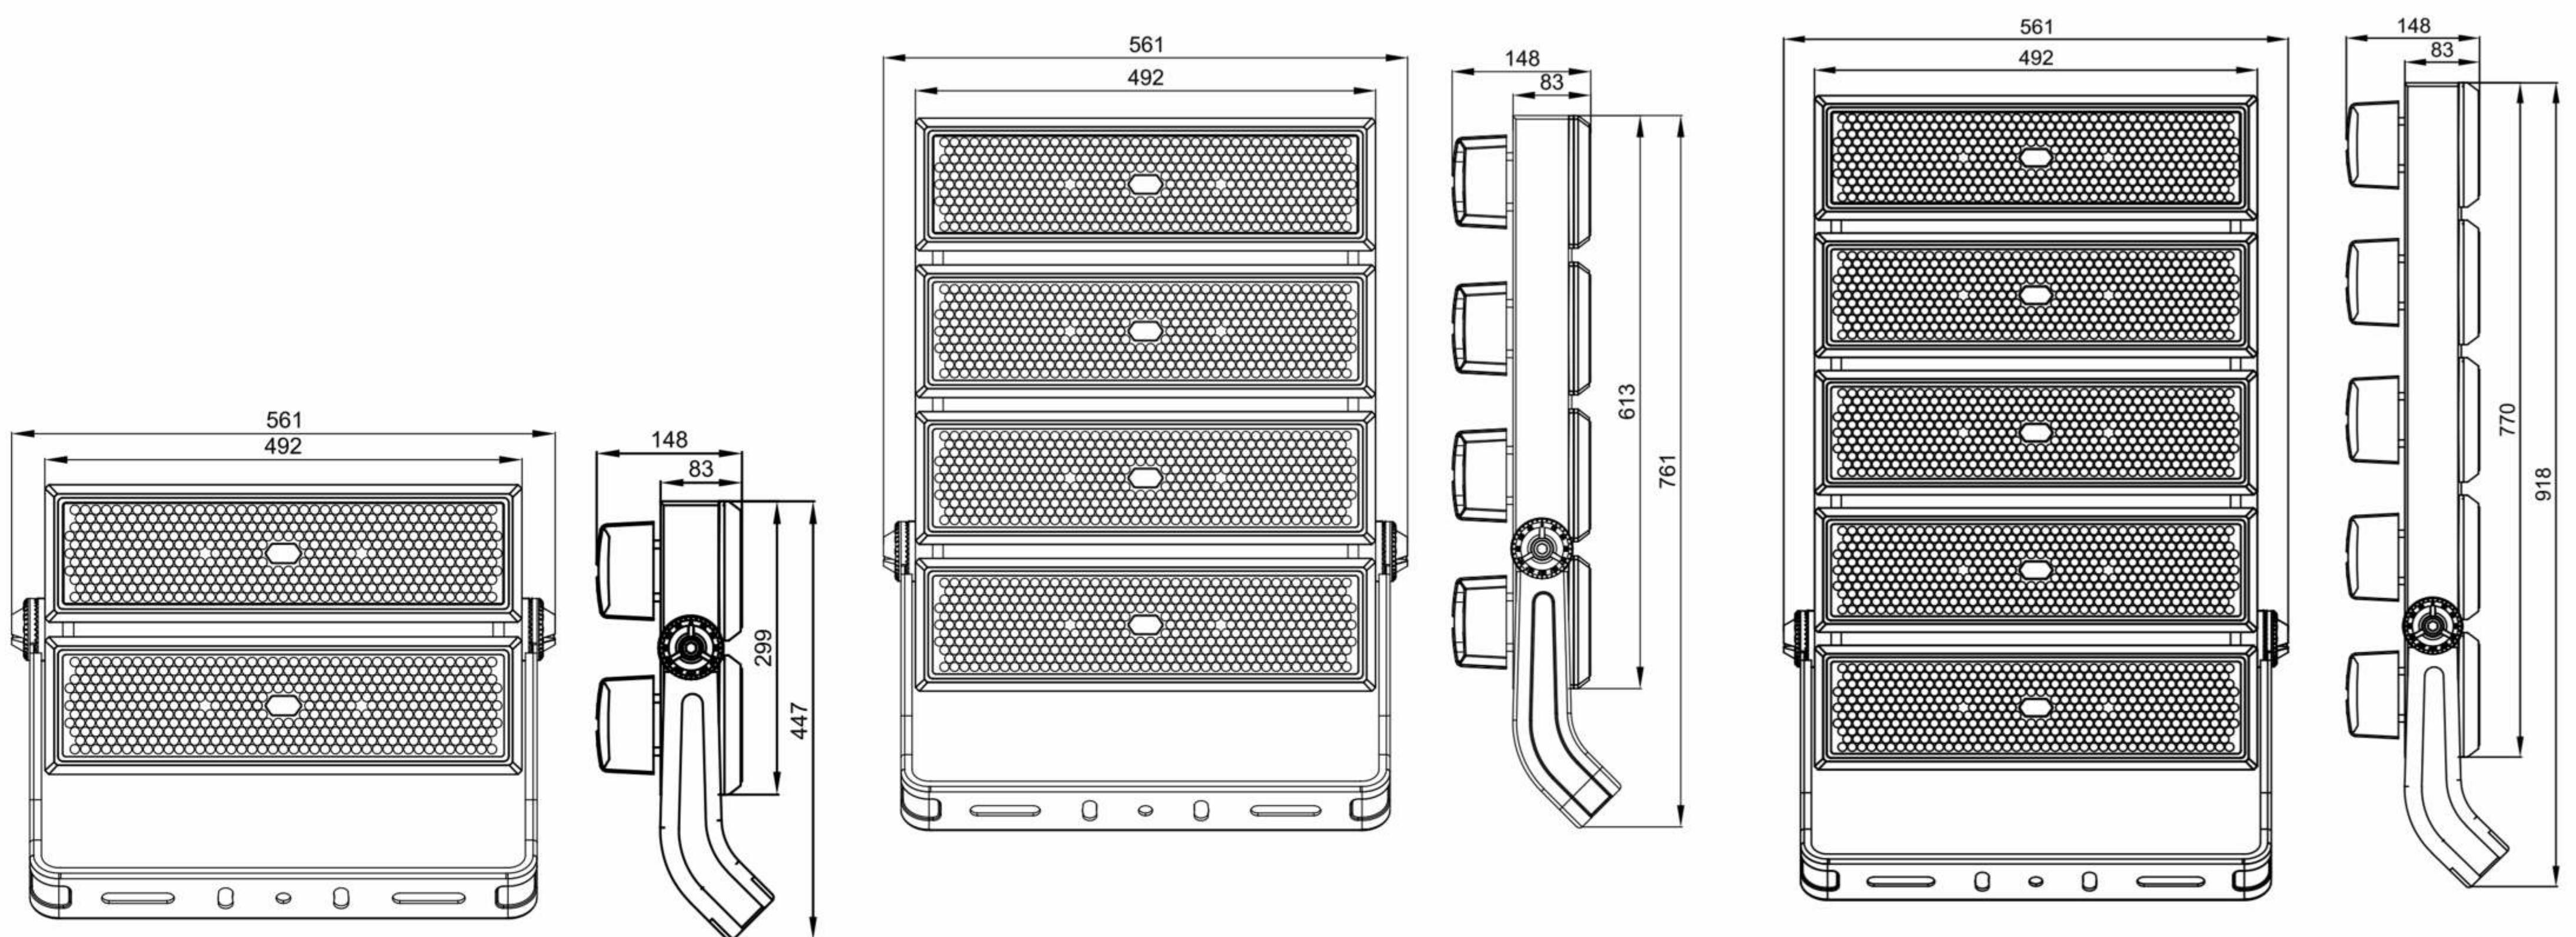

500W

1200W

1800W

LED Bollard / DLW-LED-064-LOUVER 30W

Key Features:




- Die-casting aluminum alloy housing
- With anti-glare tube
- Anti-UV injection polycarbonate diffuser
- Lumileds 2835 led chip
- Anti-UV electrostatic powder spraying
- 5 years warranty



SPECIFICATION

Model No	Power	Voltage	CCT	CRI	Lumens
DLW-LED-064-LOUVER-10W	10W	100-277VAC	3000K,4000K,5000K,5700K	RA>80	70LM/W
DLW-LED-064-LOUVER-15W	15W	100-277VAC	3000K,4000K,5000K,5700K	RA>80	70LM/W
DLW-LED-064-LOUVER-20W	20W	100-277VAC	3000K,4000K,5000K,5700K	RA>80	70LM/W
DLW-LED-064-LOUVER-25W	25W	100-277VAC	3000K,4000K,5000K,5700K	RA>80	70LM/W
DLW-LED-064-LOUVER-30W	30W	100-277VAC	3000K,4000K,5000K,5700K	RA>80	70LM/W

DIMENSIONS

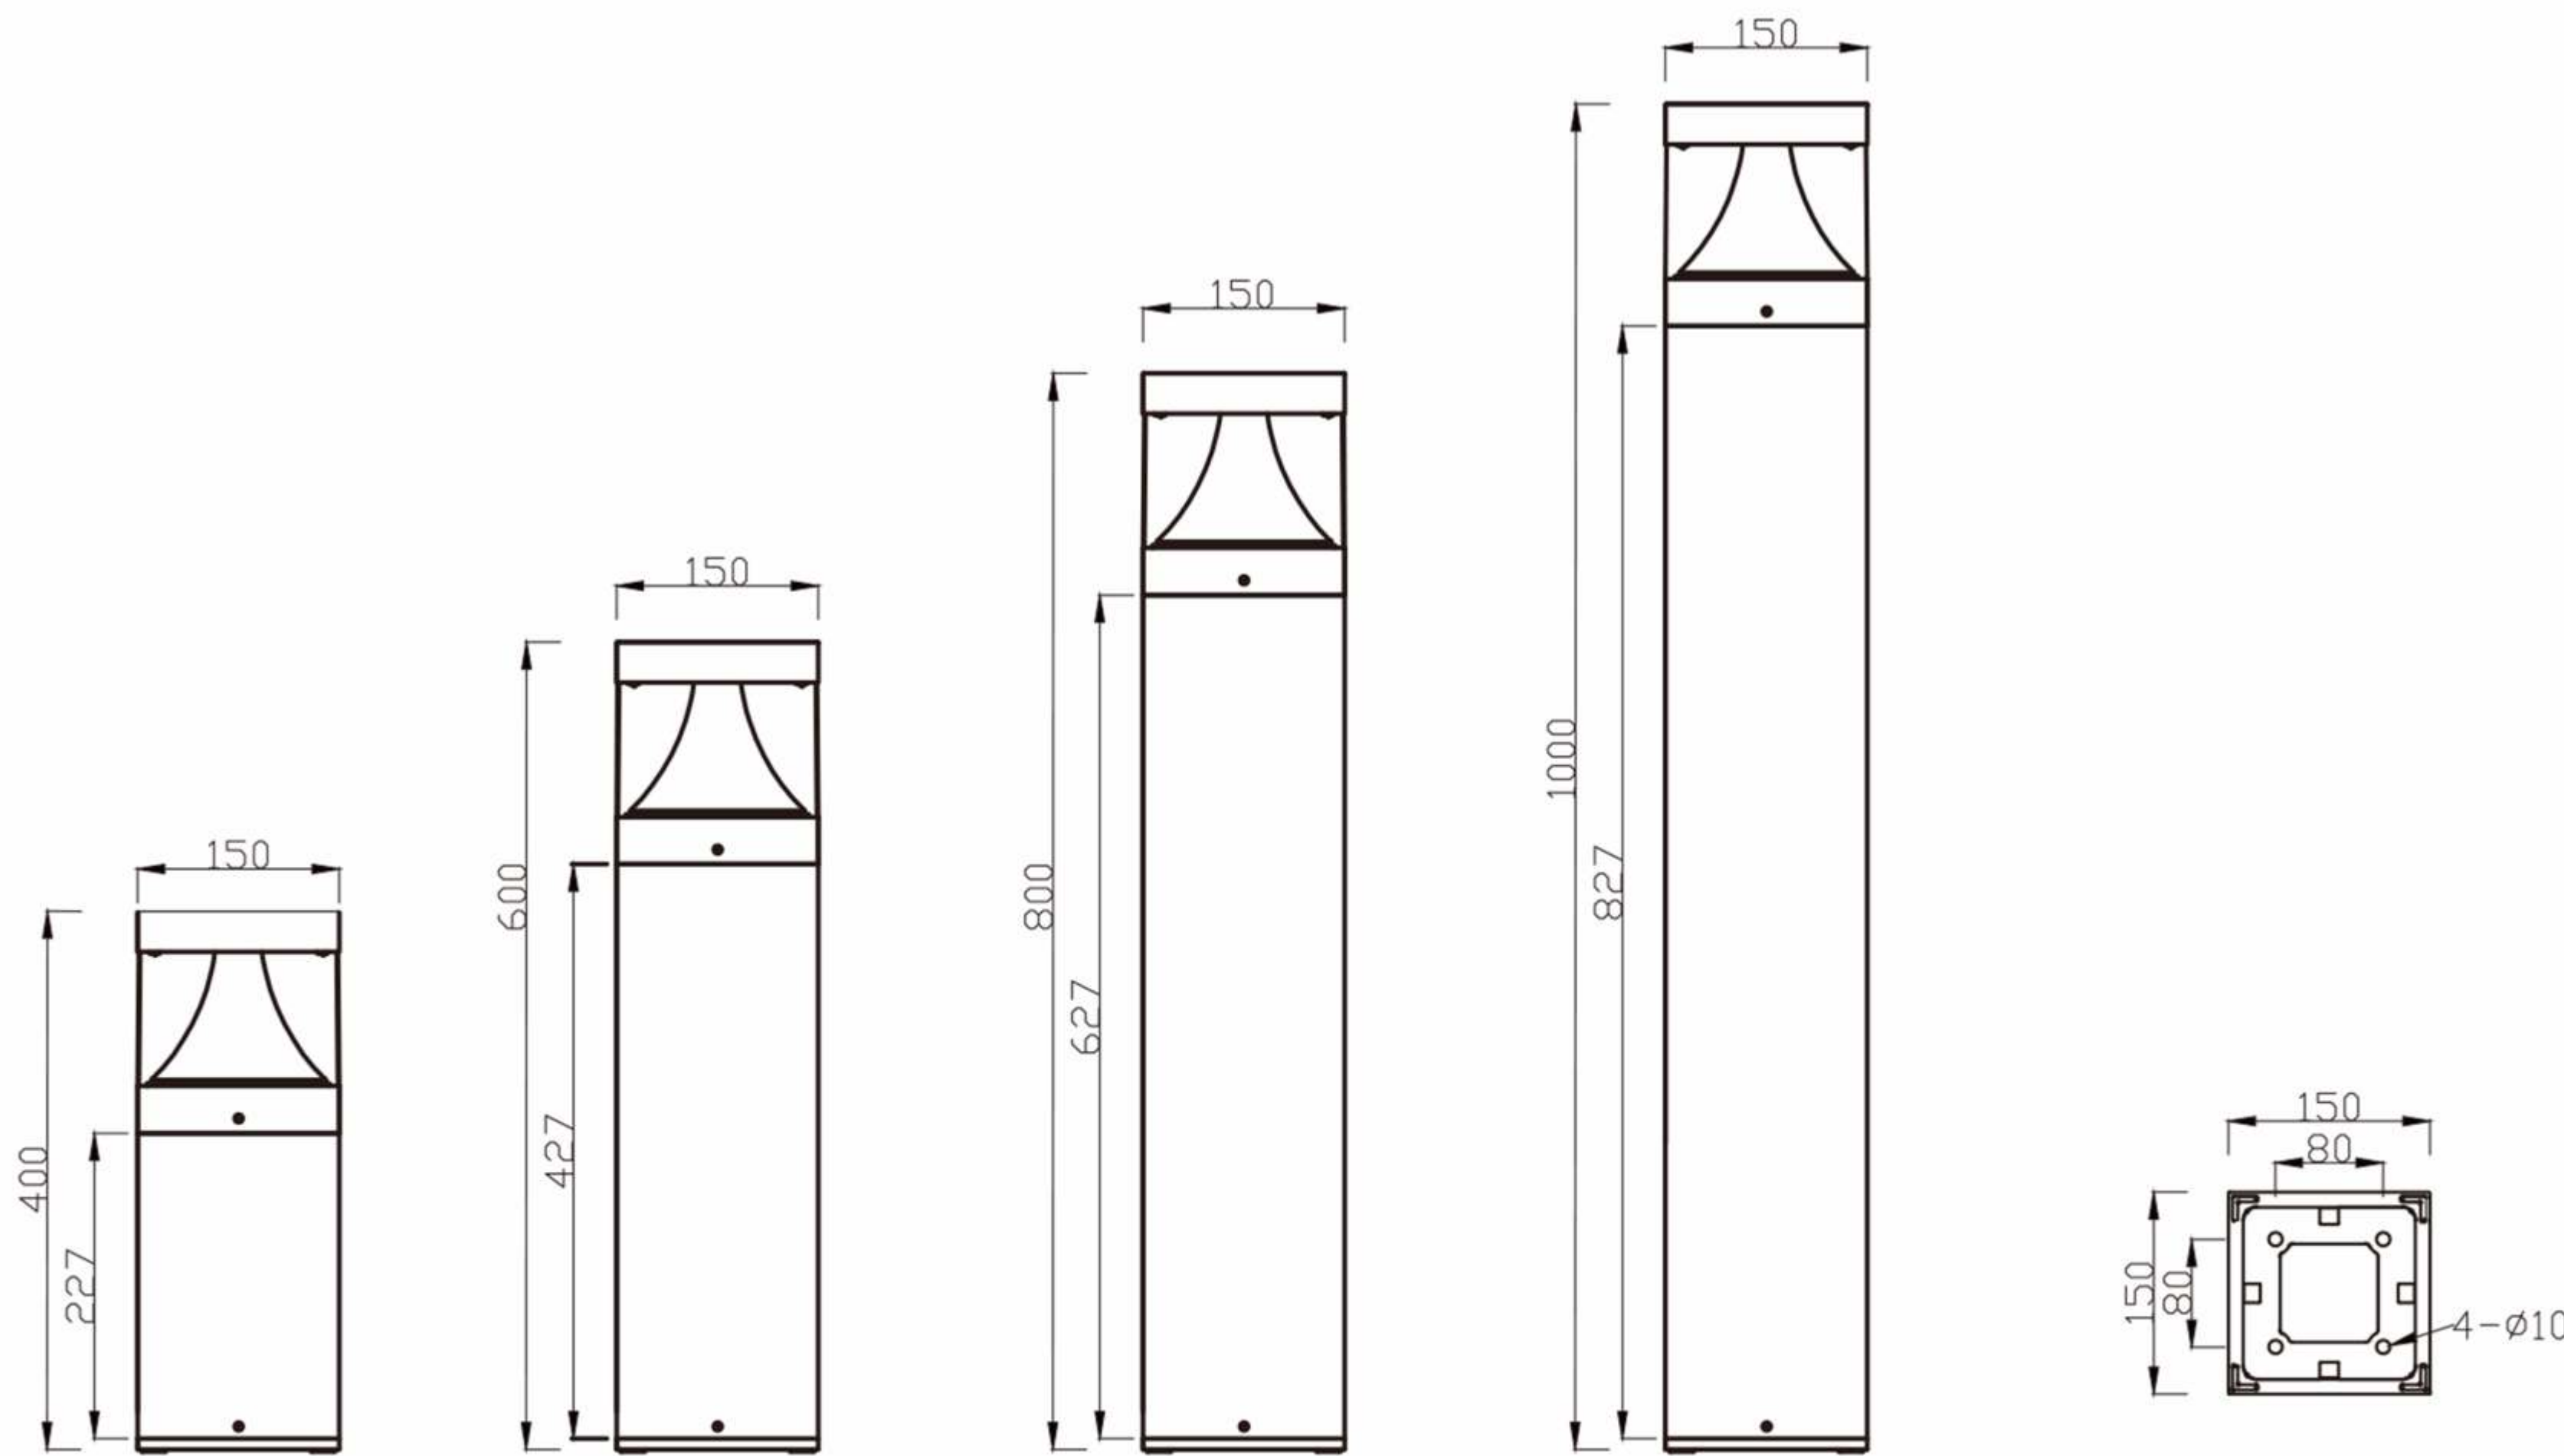

LED Bollard / DLW-LED-029-LOUVER 20W

Key Features:



- Die-casting aluminum alloy housing
- With anti-glare tube
- Anti-UV injection polycarbonate diffuser
- Lumileds 2835 led chip
- Anti-UV electrostatic powder spraying
- 5 years warranty



SPECIFICATION

Model No	Power	Voltage	CCT	CRI	Lumens
DLW-LED-029-LOUVER-10W	10W	100-277VAC	3000K,4000K,5000K,5700K	RA>80	70LM/W
DLW-LED-029-LOUVER-20W	20W	100-277VAC	3000K,4000K,5000K,5700K	RA>80	70LM/W

DIMENSIONS

